
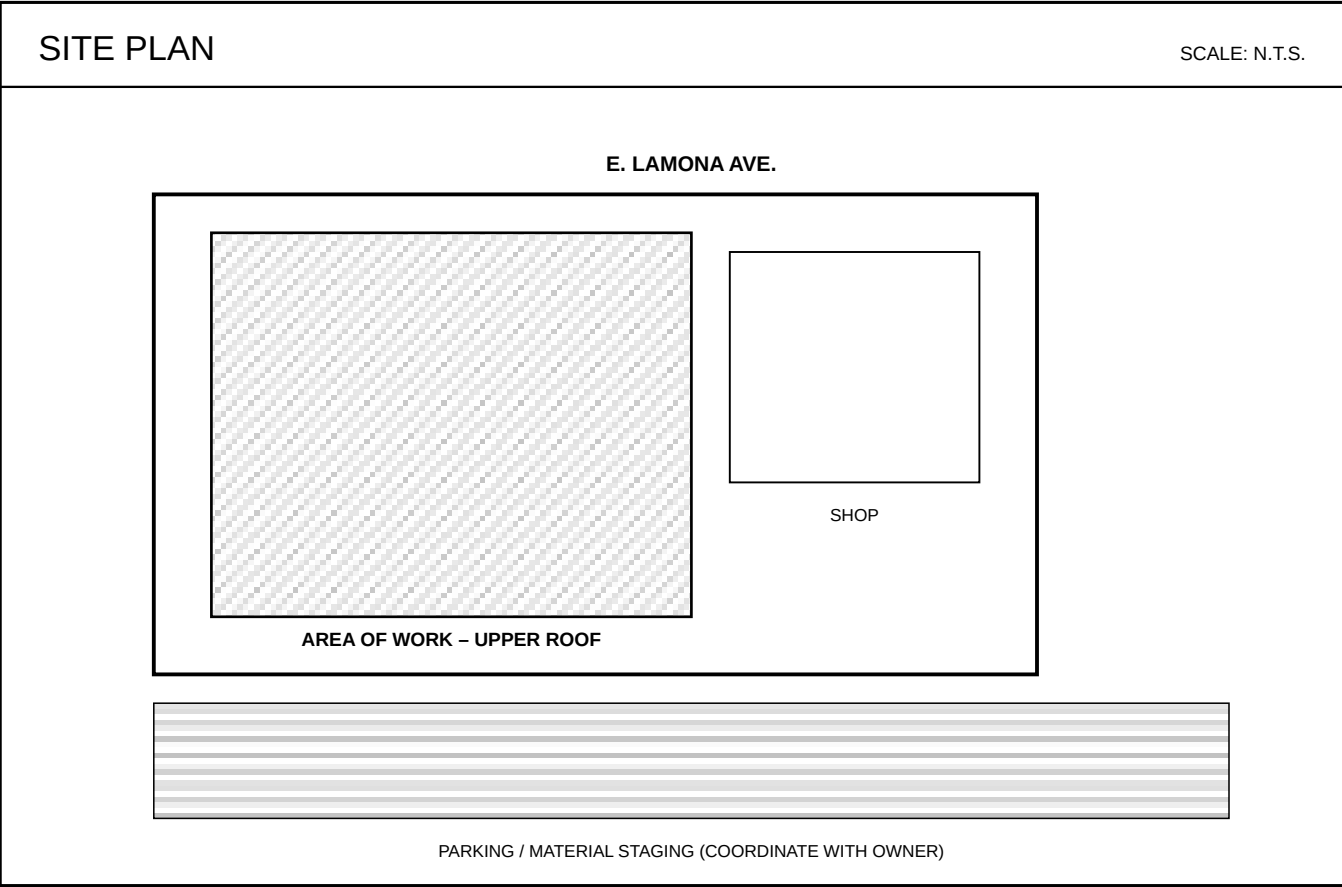


TRAINING CENTER ROOF REPLACEMENT

5537 E. LAMONA AVE. #1
FRESNO, CALIFORNIA 93727

PRACTICE BID SET FOR APPRENTICE TRAINING – FICTIONAL PROJECT, COMPANIES AND PEOPLE

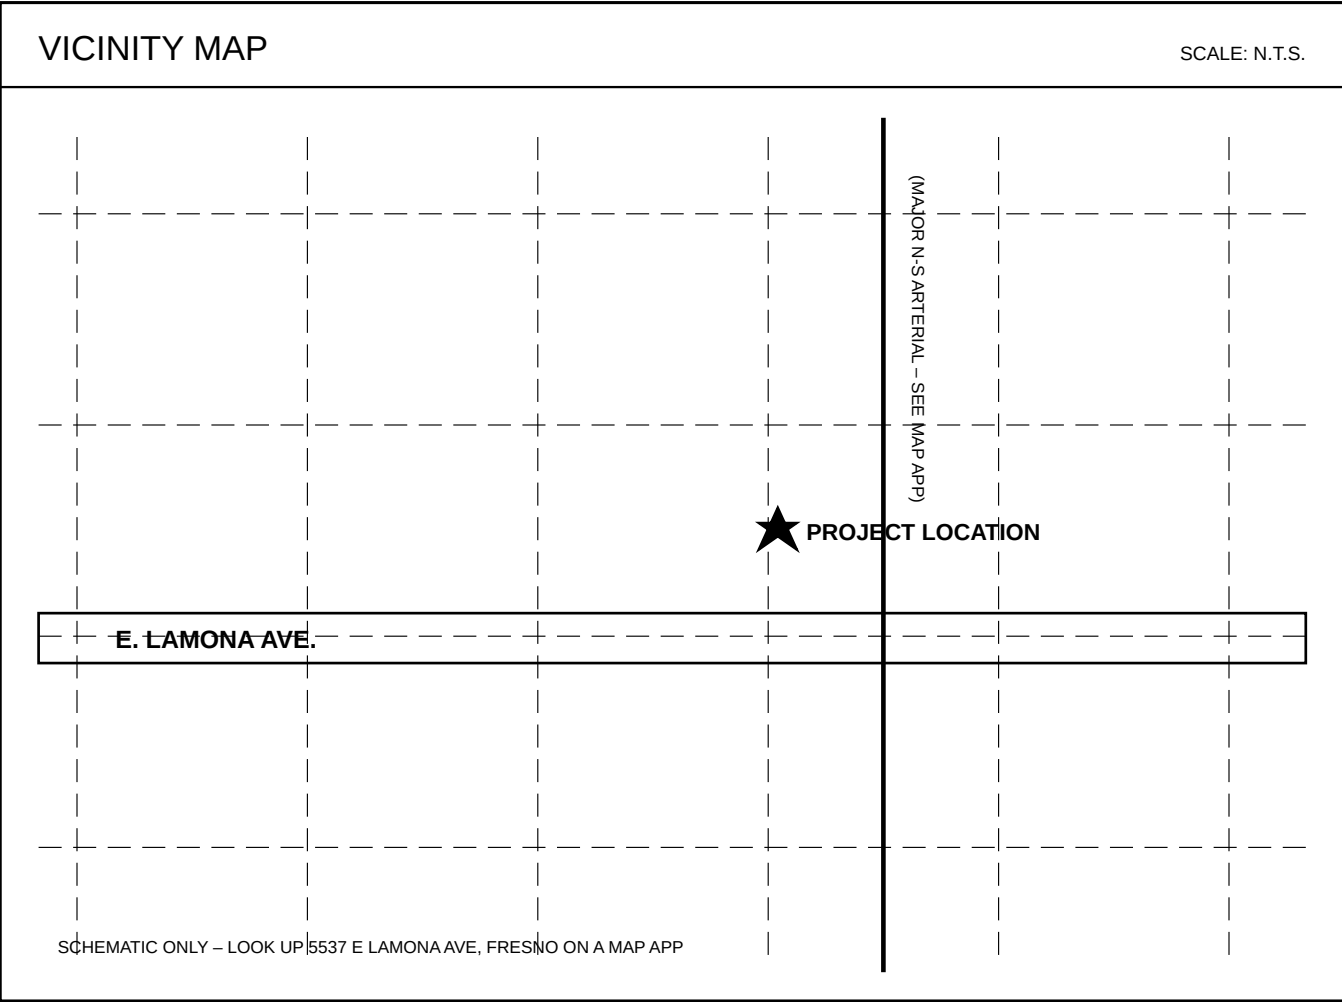

BUILDING DATA	
APN	PRACTICE – N/A
OCCUPANCY	B / E – ADULT TRAINING CENTER
CONSTRUCTION TYPE	II-B
STORIES	2 + MECHANICAL PENTHOUSE
ROOF DECK	CAST-IN-PLACE CONCRETE
OCCUPIED DURING WORK	YES – CLASSES IN SESSION
AREA OF WORK	± 10,300 SQ. FT. (UPPER ROOF)
FIRE SPRINKLERS	YES

APPLICABLE CODES
PERFORM ALL WORK IN CONFORMANCE WITH THE LATEST EDITIONS OF ALL APPLICABLE CODES INCLUDING: 1. 2025 CALIFORNIA BUILDING CODE (CBC), TITLE 24 PART 2 2. 2025 CALIFORNIA MECHANICAL CODE (CMC), PART 4 3. 2025 CALIFORNIA PLUMBING CODE (CPC), PART 5 4. 2025 CALIFORNIA ELECTRICAL CODE (CEC), PART 3 5. 2025 CALIFORNIA ENERGY CODE, PART 6 (COOL ROOF) 6. 2025 CALIFORNIA FIRE CODE (CFC), PART 9 7. CAL/OSHA TITLE 8 CONSTRUCTION SAFETY ORDERS

APPLICABLE SPECIFICATIONS
1.0. ROOFING SPECIFICATIONS PREPARED BY SIERRA ROOF CONSULTING, INC. (DIVISION 07 – SECTIONS 07 01 50, 07 22 00, 07 52 00, 07 62 00, 07 72 00). 2.0. MECHANICAL, PLUMBING AND ELECTRICAL SPECIFICATIONS PREPARED BY VALLEY MEP ENGINEERS. 3.0. ROOFTOP CARRIER (VALLEY WIRELESS CO.) STANDARDS FOR WORK NEAR ANTENNAS AND CABLE TRAYS – AVAILABLE FROM THE OWNER. 4.0. IF THERE IS A CONFLICT BETWEEN SPECIFICATIONS, THE MORE STRINGENT REQUIREMENT APPLIES.

PROJECT DIRECTORY
OWNER: CENTRAL VALLEY ROOFERS & WATERPROOFERS JATC 5537 E. LAMONA AVE. #1, FRESNO, CA 93727 TRAINING DIRECTOR – (559) 555-0100
ROOFING CONSULTANT (SPECS & ROOF DRAWINGS): SIERRA ROOF CONSULTING, INC. 1100 E. PRACTICE WAY, SUITE 27 - FRESNO, CA 93700 PROJECT CONSULTANT – A. VEGA
MECHANICAL / PLUMBING / ELECTRICAL ENGINEER: VALLEY MEP ENGINEERS 900 N. SAMPLE BLVD. - FRESNO, CA 93700 (559) 555-0177
HVAC REPLACEMENT CONTRACTOR (SEPARATE CONTRACT – N.I.C.): FOOTHILL AIR MECHANICAL, INC. – (559) 555-0188
ROOFTOP CARRIER / TENANT: VALLEY WIRELESS CO. – SITE #CV-0527 NETWORK OPERATIONS – (559) 555-0199
ALL COMPANIES, PEOPLE AND PHONE NUMBERS ARE FICTIONAL.

GENERAL NOTES
1. ALL WORK SHALL CONFORM WITH ALL APPLICABLE LOCAL, STATE AND NATIONAL CODES. 2. CONTRACTOR SHALL PERFORM ALL WORK IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS. 3. ALL DIMENSIONS ARE APPROXIMATE. VERIFY ALL DIMENSIONS IN THE FIELD BEFORE FABRICATING PIPING, CURBS, FLASHINGS AND SUPPORTS. 4. WHERE THE PLANS AND SPECIFICATIONS DISAGREE, NOTIFY THE OWNER IN WRITING (RFI). THE MOST STRINGENT REQUIREMENT APPLIES. 5. BIDDERS SHALL VISIT THE SITE AND BECOME FAMILIAR WITH EXISTING CONDITIONS BEFORE SUBMITTING A PROPOSAL. NO ALLOWANCE WILL BE MADE FOR CONDITIONS THAT COULD HAVE BEEN SEEN. 6. CONTRACTOR IS RESPONSIBLE FOR RESTORING ALL SURFACES DAMAGED BY THE WORK. 7. ALL DEVICES AND EQUIPMENT ARE NEW UNLESS NOTED AS EXISTING <E>. 8. PROVIDE ANY ITEM NOT SHOWN THAT IS CLEARLY NECESSARY FOR A COMPLETE, WATERTIGHT AND WORKING SYSTEM AT NO INCREASE IN PRICE. 9. THE TRAINING CENTER REMAINS OCCUPIED. KEEP EXITS, THE ROOF HATCH AREA AND THE PARKING LOT SAFE FOR APPRENTICES, STAFF AND VISITORS. NO MATERIAL STORAGE OVER OCCUPIED CLASSROOMS. 10. A METHOD OF PROCEDURE (MOP) IS MANDATORY FOR THIS PROJECT. WORK SHALL NOT START WITHOUT AN APPROVED / SIGNED MOP. A DETAILED MOP IS REQUIRED FOR EVERY PHASE OF WORK THAT MAY AFFECT BUILDING SYSTEMS, CLASSES IN SESSION OR THE CARRIER'S EQUIPMENT. 11. ROOFTOP CARRIER ANTENNAS ARE ENERGIZED. DO NOT ENTER THE AREAS INSIDE THE RF BARRIER POSTS UNTIL THE CARRIER HAS REDUCED OR SHUT OFF POWER PER ITS RF SAFETY PROGRAM. COORDINATE 72 HOURS IN ADVANCE. 12. PROTECT THE COMPUTER LAB, SHOP LABS AND TRAINING EQUIPMENT FROM DUST, WATER AND DEBRIS. PROTECTION SHALL BE INCLUDED IN THE BID. 13. NOTIFY THE OWNER 48 HOURS BEFORE ANY SHUTDOWN OF POWER, HVAC OR WATER. SHUTDOWNS SHALL BE ON SATURDAYS OR AFTER 5:00 PM ON WEEKDAYS AND KEPT TO A MINIMUM. 14. CORING OR DRILLING THE CONCRETE DECK REQUIRES A SCAN OF THE DECK FIRST – SEE MECHANICAL SHEETS. 15. COORDINATE EQUIPMENT LOCATIONS, CONTROL AND POWER WIRING WITH THE HVAC REPLACEMENT CONTRACTOR. 16. ARRANGE, PAY FOR AND OBTAIN ALL PERMITS NECESSARY FOR A COMPLETE PROJECT, INCLUDING CRANE / HOIST PERMITS.

SUMMARY OF WORK
1. REMOVE ALL EXISTING BUILT-UP ROOFING, BASE FLASHINGS, INSULATION AND SHEET METAL FLASHINGS DOWN TO THE CONCRETE DECK; DISPOSE OF ALL DEBRIS. 2. DEMO EXISTING MECHANICAL UNITS AND CURBS NOT IN USE AS SHOWN ON M102D. 3. RAISE EXISTING PIPING AS SHOWN ON M102 & M102D. 4. TEMPORARILY REMOVE EXISTING EXHAUST FANS TO RAISE THE CURBS – SEE M102 & M102D. 5. PRIME THE CONCRETE DECK AND INSTALL SBS SELF-ADHERED VAPOR BARRIER OVER THE PRIMED DECK (6" LAPS). 6. INSTALL TAPERED POLYISO INSULATION SET IN COLD-PROCESS ADHESIVE – 1/4" PER FOOT SLOPE – WITH TAPERED CRICKETS WHERE SHOWN OR NEEDED FOR DRAINAGE. 7. INSTALL MINIMUM 1/4" GYPSUM COVER BOARD OVER THE TAPERED INSULATION AND CRICKETS, SECURED WITH SCREWS AND PLATES PER SPECIFICATIONS. 8. INSTALL NEW THREE-PLY SBS MODIFIED-ASPHALT ROOF SYSTEM (BASE SHEET, INTER-PLY SHEET, CAP SHEET WITH FACTORY COATING MEETING TITLE 24 "COOL ROOF"). 9. INSTALL NEW FLASHINGS, 24 GA. COUNTERFLASHINGS AND PIPE SUPPORTS (MAX. 8' O.C.) PER DRAWINGS. 10. MODIFY THE PENTHOUSE STUCCO AS SHOWN. INSTALL NEW ROOF DRAINS AND OVERFLOW DRAINS WHERE SHOWN. BY CARRIER: 11. PROVIDE A SEPARATE LINE ITEM FOR WORK RELATED TO VALLEY WIRELESS CO. SHOWN ON M102 & M102D.

DRAWING INDEX	
G001	GENERAL / TITLE / COVER SHEET
A101D	PARTIAL ROOF PLAN – DEMO ARCHITECTURAL
A101	PARTIAL ROOF PLAN – NEW ARCHITECTURAL
A501	DETAILS – ARCHITECTURAL
A502	DETAILS – ARCHITECTURAL
M101	SECOND FLOOR PLAN – NEW MECHANICAL
M102D	PARTIAL ROOF PLAN – DEMO MECHANICAL
M102	PARTIAL ROOF PLAN – NEW MECHANICAL
M501	DETAILS – MECHANICAL
M502	DETAILS – MECHANICAL
M503	SCHEDULES – MECHANICAL

SEQUENCE OF CONSTRUCTION
1. THE HVAC REPLACEMENT PROJECT (NEW RTU-1 AND RTU-2) IS A SEPARATE CONTRACT ALREADY UNDER WAY. ROOFER SHALL COORDINATE WITH THAT CONTRACTOR. 2. THE NEW RTUS MUST BE INSTALLED FIRST. RE-ROOF THE AREA AROUND THE NEW RTUS FIRST. 3. ALL EXISTING PIPES, CONDUITS AND CABLE TRAYS MUST BE RAISED TO A MINIMUM OF 18" ABOVE THE NEW ROOF. 4. RE-ROOF THE REST OF THE ROOF AFTER ALL PIPES, CONDUITS AND CABLE TRAYS ARE RAISED.

SPECIAL CONDITIONS
1. ATTENDANCE AT THE SCHEDULED PRE-BID WALK-THROUGH IS MANDATORY. 2. COORDINATE ALL ROOFING WORK WITH THE HVAC WORK, THE CARRIER AND THE JATC CLASS SCHEDULE AS DIRECTED BY THE OWNER'S REPRESENTATIVE. 3. QUALITY ASSURANCE WILL BE PROVIDED BY THE OWNER'S REPRESENTATIVE (ROOFING CONSULTANT). 4. CONTRACTOR SHALL PROVIDE A GUARANTEE TO KEEP THE ROOF SYSTEM WATERTIGHT FOR FIVE (5) YEARS PER THE SPECIFICATIONS. 5. THE MANUFACTURER SHALL PROVIDE A TWENTY (20) YEAR NDL LABOR & MATERIAL WARRANTY COVERING THE ROOF SYSTEM, FLASHINGS AND ALL ITEMS INCORPORATED IN THE ROOF SYSTEM.

ABBREVIATIONS			
<E>	EXISTING	EF	EXHAUST FAN
N.I.C.	NOT IN CONTRACT	OA	OUTSIDE AIR
N.T.S.	NOT TO SCALE	RF	RADIO FREQUENCY
MOP	METHOD OF PROCEDURE	SBS	STYRENE-BUTADIENE-STYRENE
NDL	NO DOLLAR LIMIT (WARRANTY)	V.I.F.	VERIFY IN FIELD
RTU	ROOFTOP UNIT	TYP.	TYPICAL
AHU	AIR HANDLING UNIT	U.O.N.	UNLESS OTHERWISE NOTED
CU	CONDENSING UNIT		

SYMBOLS LEGEND			
	DETAIL NUMBER / SHEET WHERE DRAWN		NEW WORK
	SECTION CUT – LETTER / SHEET		EXISTING TO BE REMOVED (DEMO)
	REFERENCE SHEET NOTE (SEE NOTES)		ROOF SLOPE – ARROW POINTS DOWNHILL
	EQUIPMENT TAG		VALLEY (V) / RIDGE (R) – TAPERED SYSTEM
	COLUMN GRID LINE		CRICKET
	DRAWING TITLE / NUMBER / SCALE		ROOF DRAIN IN TAPERED SUMP
	REVISION CLOUD / REVISION NO.		ROOF DRAIN + OVERFLOW DRAIN
	NORTH ARROW		VENT / PIPE THROUGH ROOF
	GRAPHIC SCALE		EXHAUST FAN ON CURB
	EXISTING TO REMAIN		HOOD / LOUVER
	RF BARRIER POST (WALK PAD UNDER)		CARRIER ANTENNA
	SLEEPER / EQUIPMENT SUPPORT		CABLE TRAY
	GAS PIPING		POINT OF CONNECTION (•) / DISCONNECT (Ø)
	INSULATION (IN SECTION)		CONCRETE (IN SECTION)
	WOOD NAILER / BLOCKING (IN SECTION)		AREA OF WORK / GRATING

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

SRC

SIERRA ROOF CONSULTING, INC.
ROOFING & WATERPROOFING CONSULTANTS
1100 E. PRACTICE WAY, SUITE 27 - FRESNO, CA 93700
OFFICE (559) 555-0142

CONSULTANT STAMP
(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
	REVIEW SET	08/03/26	SRC
	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE


PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727


SHEET TITLE:

GENERAL / TITLE /
COVER SHEET

JATC PROJECT NO. JATC-26-07	DATE: 08/24/26 DRAWN BY: SRC	SCALE: AS NOTED CHECKED: JR
PRACTICE SET 3A – INTRO TO PLANS		SHEET NO. G001

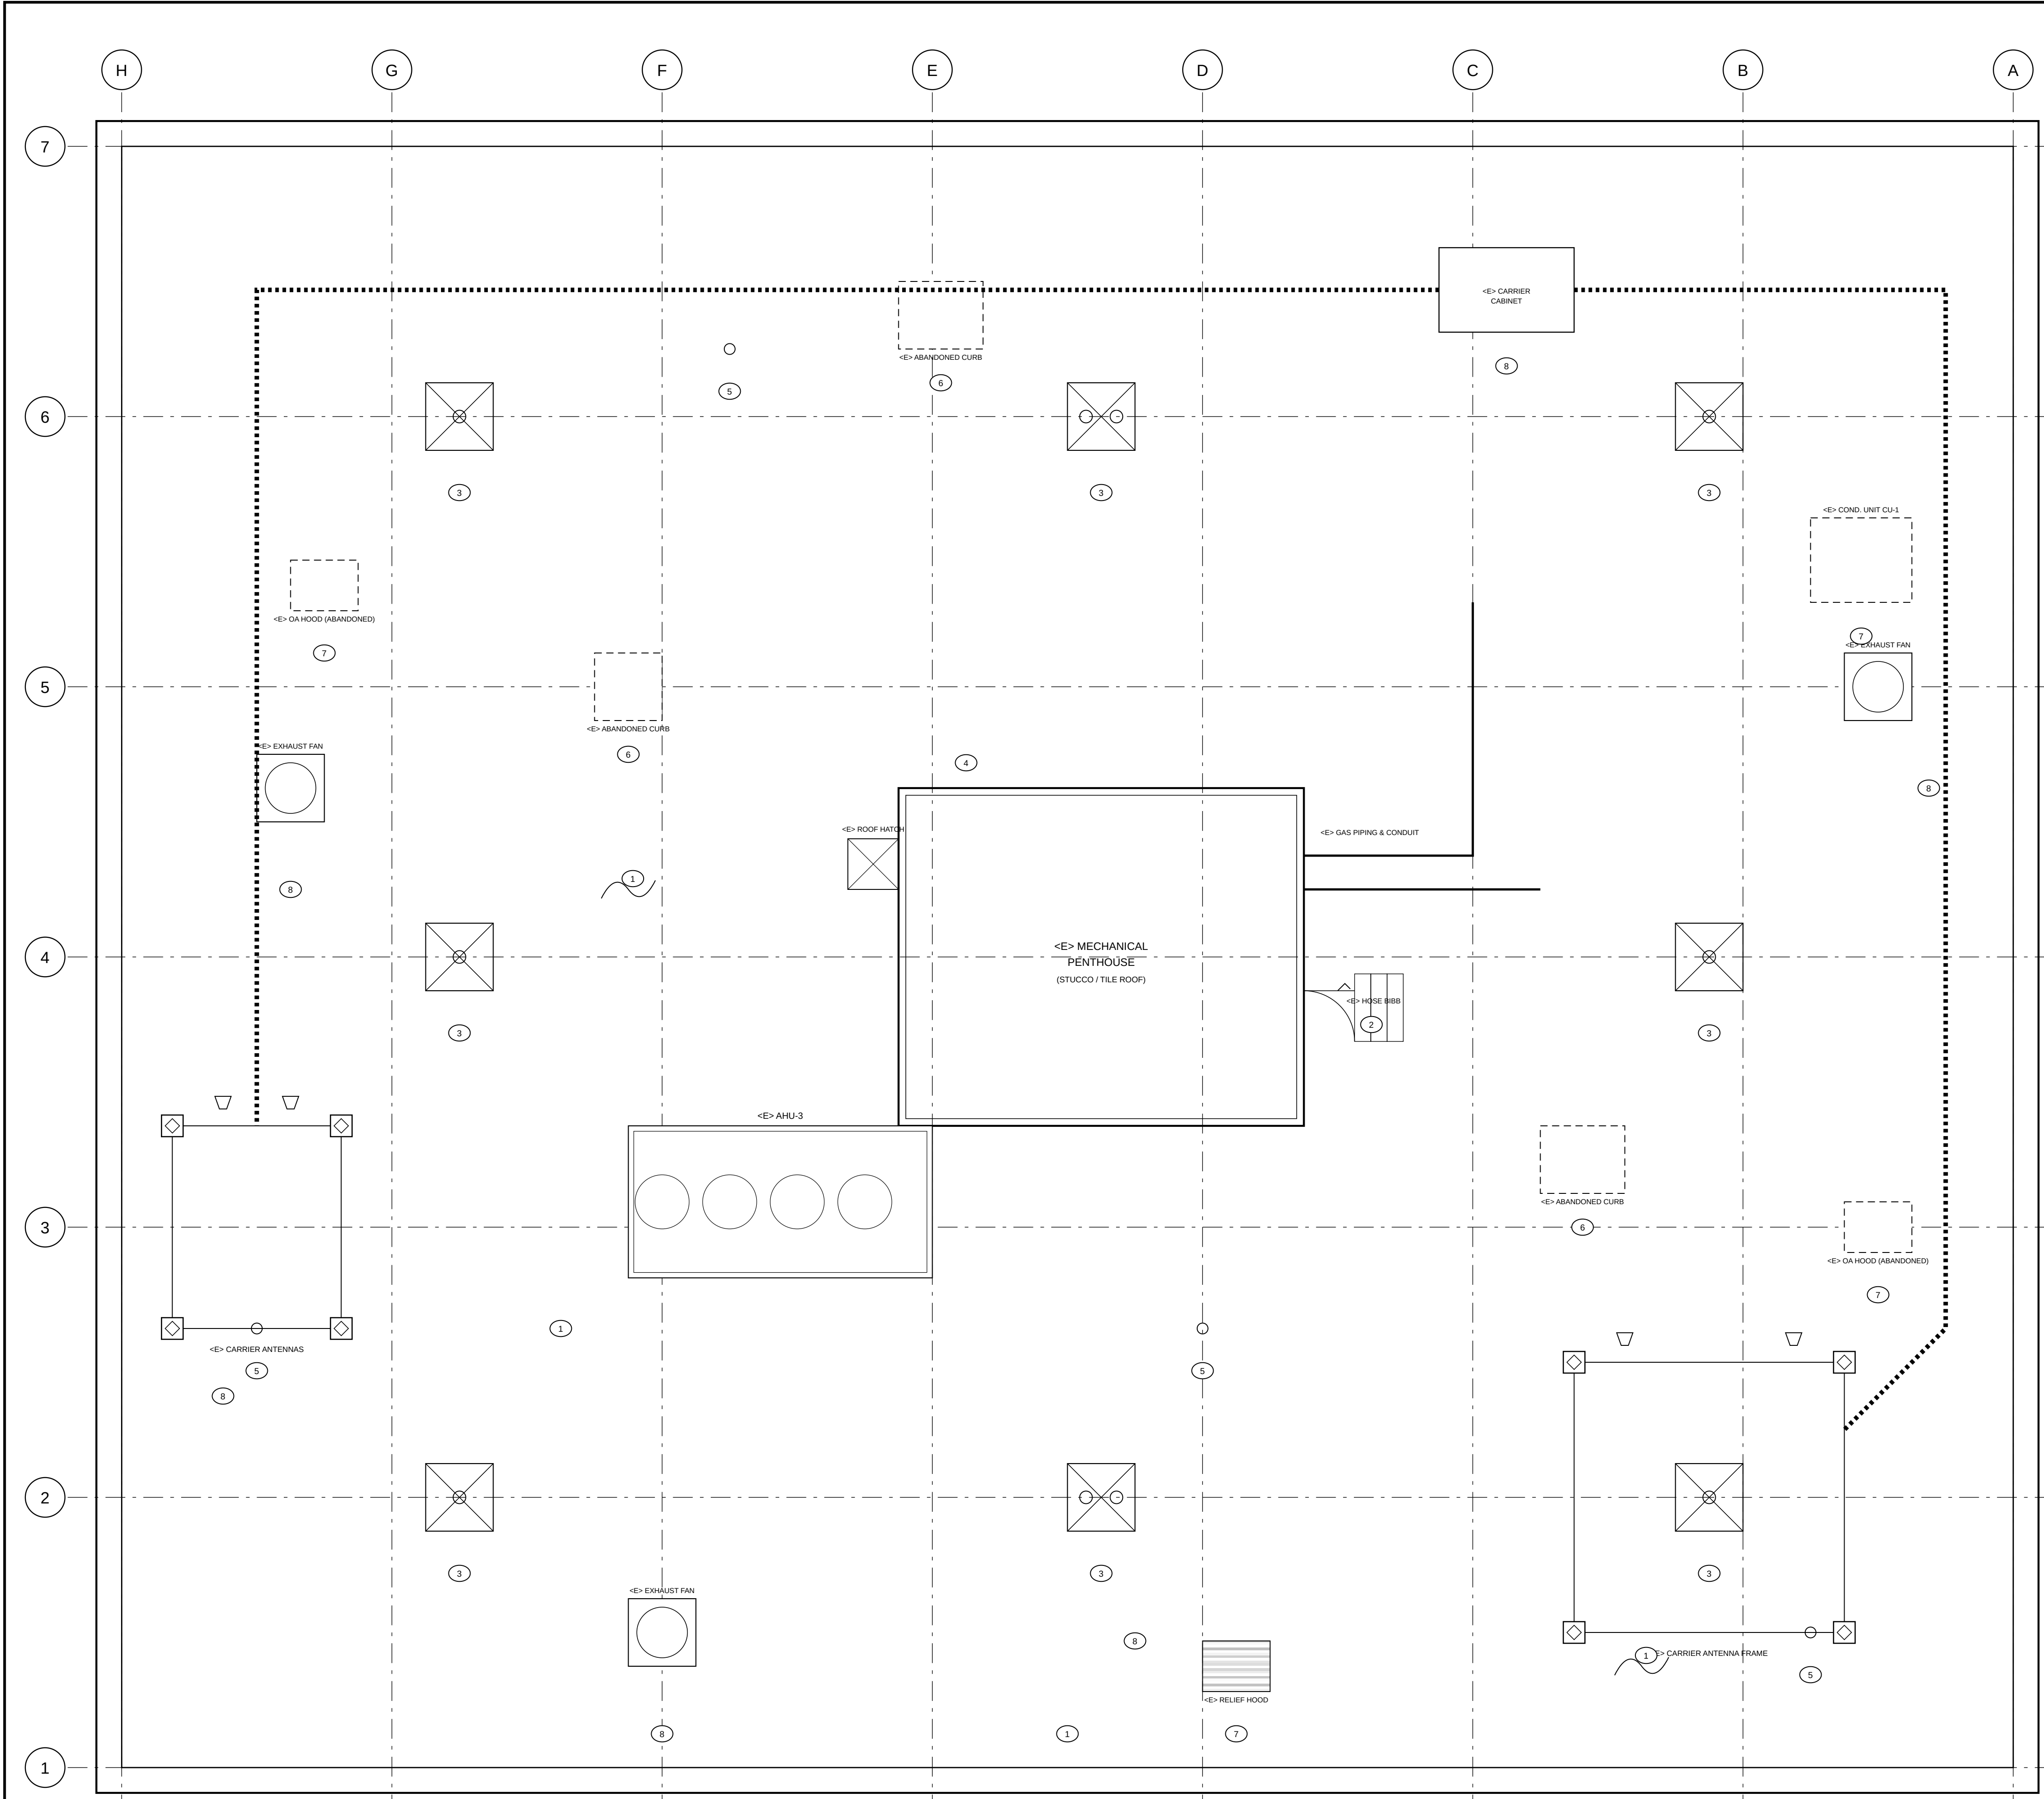

1 PARTIAL ROOF PLAN – DEMO
SCALE: 3/16" = 1'-0"




GENERAL SHEET NOTES

- A. ROOF MEMBRANE, INSULATION, SHEET METAL FLASHINGS AND SEALANTS SHALL COMPLY WITH THE ROOFING SPECIFICATIONS PREPARED BY SIERRA ROOF CONSULTING, INC.
- B. THE TRAINING CENTER STAYS OPEN DURING THE WORK – CLASSES AND SHOP LABS ARE IN SESSION BELOW. DO NOT ALLOW ANY LEAK INTO CLASSROOMS, SHOP LABS OR THE COMPUTER LAB. REMOVE ONLY AS MUCH ROOFING AS CAN BE RE-ROOFED AND MADE WATERTIGHT THE SAME DAY.
- C. ALL LOCATIONS AND SIZES ARE APPROXIMATE AND SHALL BE FIELD VERIFIED BEFORE WORK BEGINS.
- D. REPORT ANY DIFFERENCE BETWEEN THE DRAWINGS AND FIELD CONDITIONS TO THE OWNER'S REPRESENTATIVE BEFORE PROCEEDING.
- E. SEE MECHANICAL SHEETS FOR ADDITIONAL DEMOLITION.

REFERENCE SHEET NOTES

- 1 REMOVE EXISTING ROOFING SYSTEM, INSULATION AND ALL ASSOCIATED FLASHINGS DOWN TO THE CONCRETE DECK.
- 2 SAW-CUT EXISTING PENTHOUSE STUCCO PER DETAIL 1/A502 TO INSTALL NEW BASE FLASHING.
- 3 REMOVE EXISTING DRAIN CLAMPING RINGS AND STRAINERS; STORE FOR INSPECTION. NEW DRAINS PER M102.
- 4 REMOVE EXISTING PITCH PANS FROM LEGS AND SUPPORTS.
- 5 REMOVE EXISTING PIPE AND VENT FLASHINGS.
- 6 MECHANICAL CONTRACTOR TO DEMO EXISTING ABANDONED CURBS – SEE M102D. ROOFING CONTRACTOR TO ROOF OVER THE PATCHED OPENINGS.
- 7 MECHANICAL CONTRACTOR TO DEMO EXISTING MECHANICAL EQUIPMENT & CURBS – SEE M102D FOR DETAILS.
- 8 MECHANICAL, ELECTRICAL AND CARRIER CONTRACTORS TO TEMPORARILY REMOVE EQUIPMENT FOR RAISING CURBS – SEE M102D. ROOFING CONTRACTOR TO REMOVE FLASHING AROUND EXISTING CURBS.

KEY PLAN

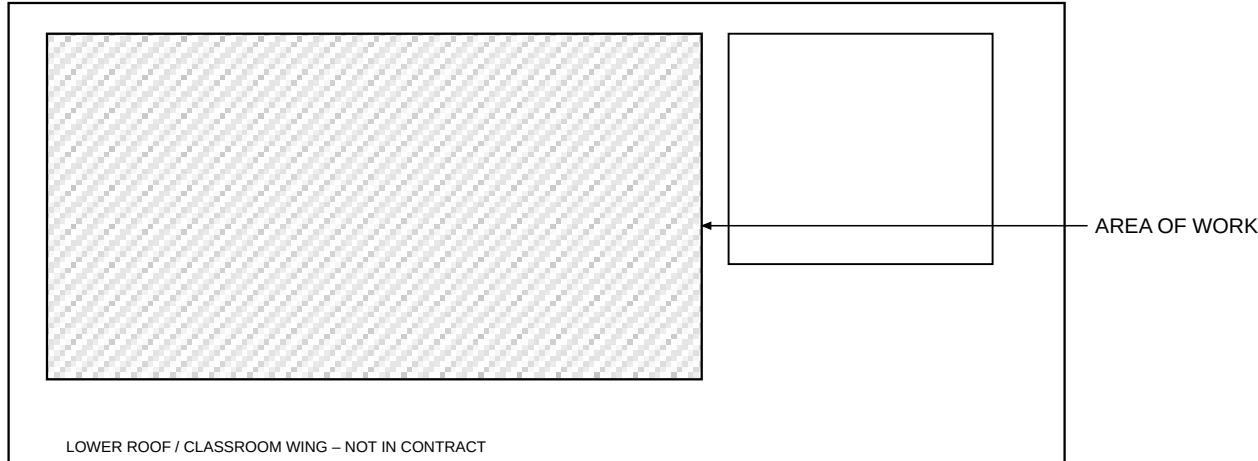

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

SRC

SIERRA ROOF CONSULTING, INC.
ROOFING & WATERPROOFING CONSULTANTS
1100 E. PRACTICE WAY, SUITE 27 - FRESNO, CA 93700
OFFICE (559) 555-0142

CONSULTANT STAMP
(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
1	REVIEW SET	08/03/26	SRC
2	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727

SHEET TITLE:

PARTIAL ROOF PLAN –
DEMO ARCHITECTURAL

JATC PROJECT NO.

JATC-26-07

PRACTICE SET

3A – INTRO TO PLANS

DATE: 08/24/26


DRAWN BY: SRC

SCALE: 3/16" = 1'-0"

CHECKED: JR

SHEET NO.

A101D

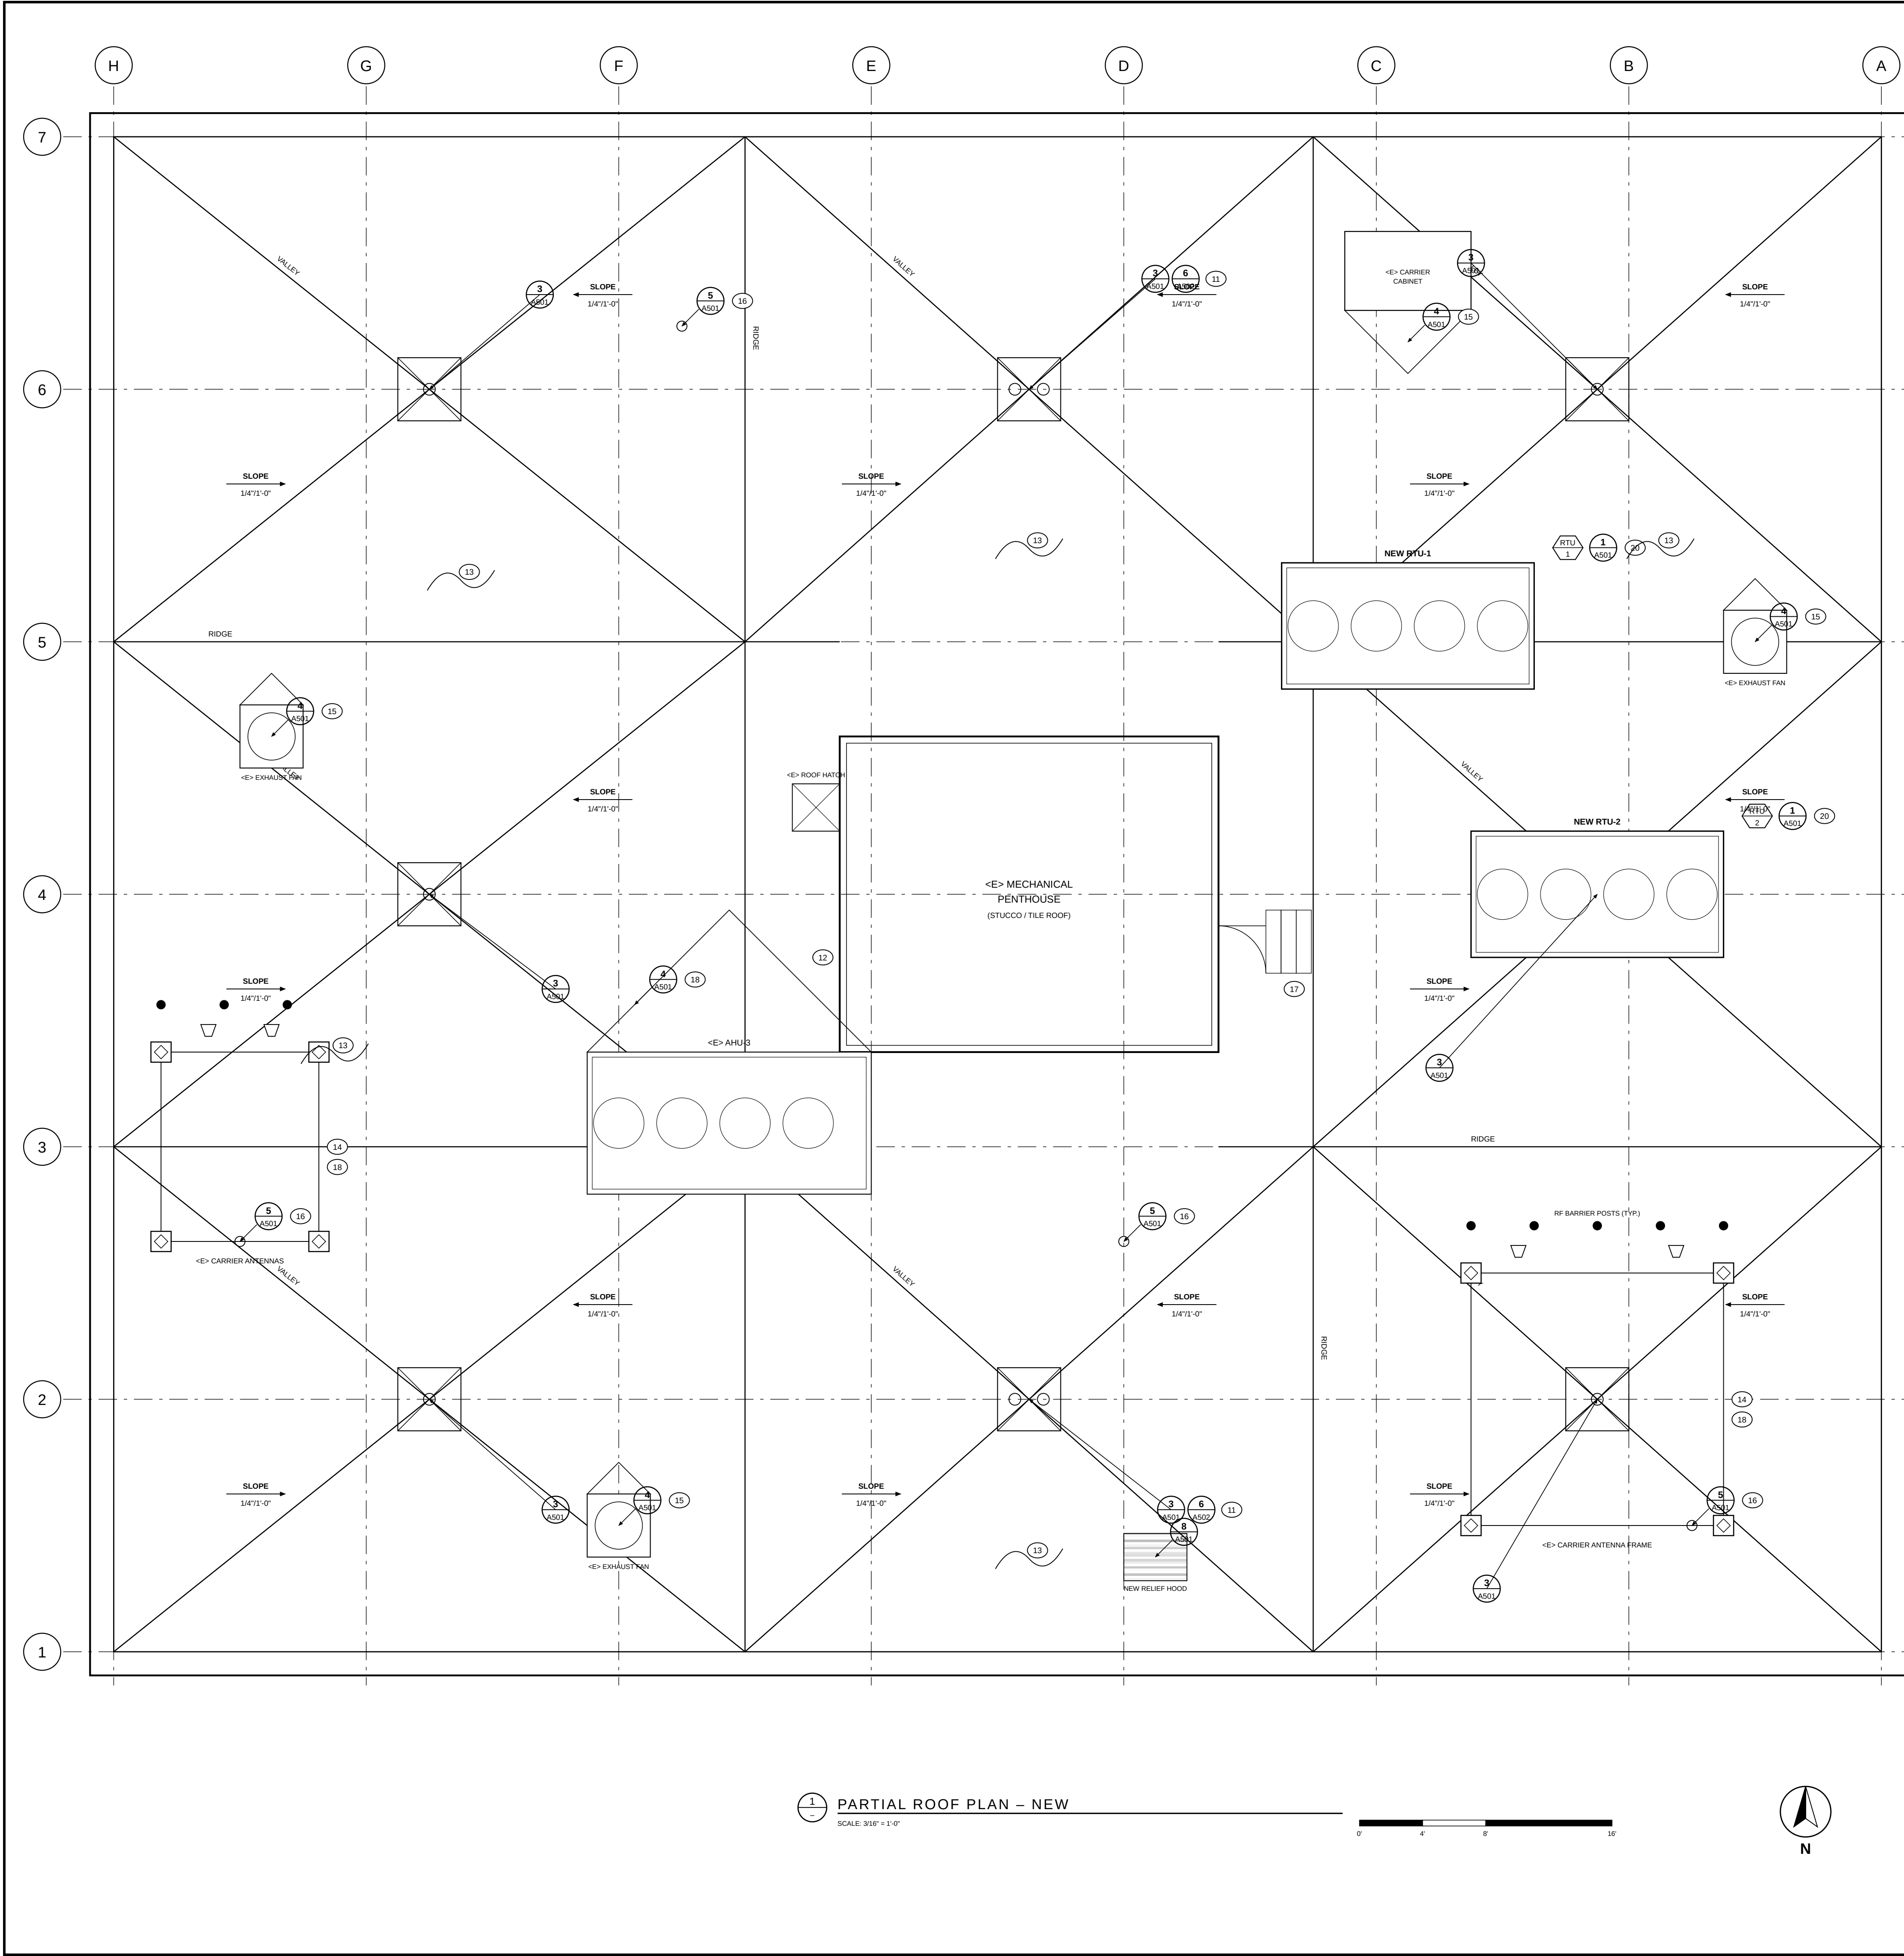

GENERAL SHEET NOTES

A. ROOF MEMBRANE, INSULATION, SHEET METAL FLASHINGS AND SEALANTS SHALL COMPLY WITH THE ROOFING SPECIFICATIONS PREPARED BY SIERRA ROOF CONSULTING, INC.

B. CLASSES AND SHOP LABS ARE IN SESSION BELOW. DO NOT ALLOW A ROOF LEAK TO DAMAGE TRAINING EQUIPMENT, THE COMPUTER LAB OR RECORDS. KEEP THE ROOF WATERTIGHT AT THE END OF EVERY DAY.

C. ALL LOCATIONS AND SIZES ARE APPROXIMATE AND ARE TO BE FIELD VERIFIED PRIOR TO WORK.

D. ANY DISCREPANCIES BETWEEN THE DRAWINGS AND FIELD CONDITIONS SHALL BE REPORTED TO THE OWNER'S REPRESENTATIVE.

E. SEE THE MECHANICAL SHEETS FOR FURTHER WORK.

REFERENCE SHEET NOTES

11 CONTRACTOR TO INSTALL NEW ROOF DRAIN AND OVERFLOW THROUGH THE DECK. SEE MECHANICAL SHEETS FOR MORE INFORMATION.

12 CONTRACTOR TO SAW-CUT PENTHOUSE STUCCO AS REQUIRED TO INSTALL NEW ROOFING AND TAPERED SYSTEM. SEE 1/A502.

13 CONTRACTOR TO INSTALL NEW VAPOR RETARDER, 1/4" PER FOOT TAPERED POLYISO INSULATION, GYPSUM COVER BOARD AND THREE-PLY SBS MODIFIED-ASPHALT ROOFING SYSTEM.

14 CONTRACTOR TO INSTALL WALK PADS UNDER THE RF BARRIER POSTS AS REQUIRED BY THE ROOFING MANUFACTURER.

15 PROVIDE FLASHING FOR RAISED CURBS OF EXISTING MECHANICAL AND CARRIER EQUIPMENT PER DETAIL 4/A501.


16 PROVIDE NEW FLASHING AROUND EXISTING PIPES, VENTS AND CONDUITS PER DETAIL 5/A501. FOR RAISED PIPES AND CONDUITS SEE MECHANICAL SHEETS.

17 PROVIDE LIQUID-APPLIED FLASHING AROUND PENTHOUSE STAIR STEPS. SEE DETAIL 5/A501 FOR FLASHING DETAIL.

18 PROVIDE AND INSTALL NEW CRICKETS AT THE UPHILL SIDE OF ALL CURBS AND SLEEPERS.

N.I.G.

20 ROOF WORK RELATED TO THE INSTALLATION OF THE NEW ROOFTOP UNITS (RTU-1 AND RTU-2) IS NOT IN THIS CONTRACT – IT IS PART OF THE HVAC REPLACEMENT PHASE.

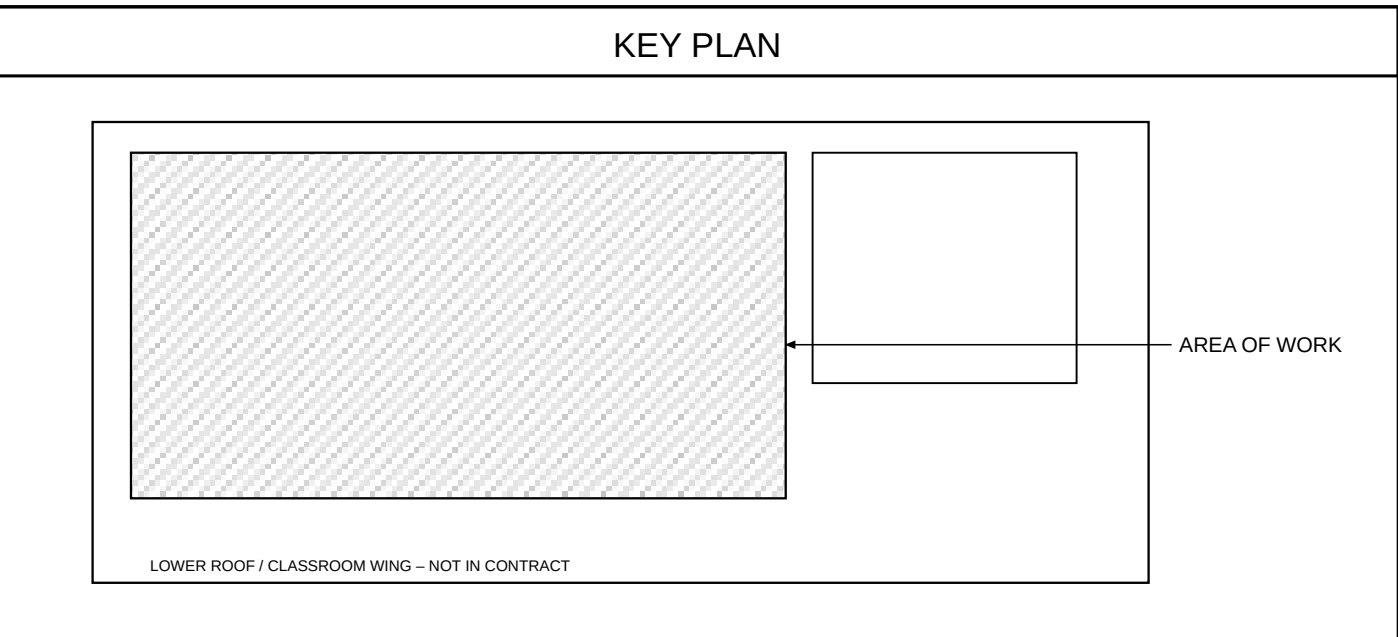

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION

FOR APPRENTICE BLUEPRINT READING ONLY

SIERRA ROOF CONSULTING, INC.

ROOFING & WATERPROOFING CONSULTANTS

1100 E. PRACTICE WAY, SUITE 27 • FRESNO, CA 93700

OFFICE (559) 555-0142

CONSULTANT STAMP

(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
1	REVIEW SET	08/03/26	SRC
2	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY

ROOFERS & WATERPROOFERS

JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER

ROOF REPLACEMENT

5537 E. LAMONA AVE. #1









FRESNO, CA 93727

SHEET TITLE:

PARTIAL ROOF PLAN –

NEW ARCHITECTURAL

JATC PROJECT NO.	DATE: 08/24/26	SCALE: 3/16" = 1'-0"
JATC-26-07	DRAWN BY: SRC	CHECKED: JR
PRACTICE SET		SHEET NO.
3A – INTRO TO PLANS		A101

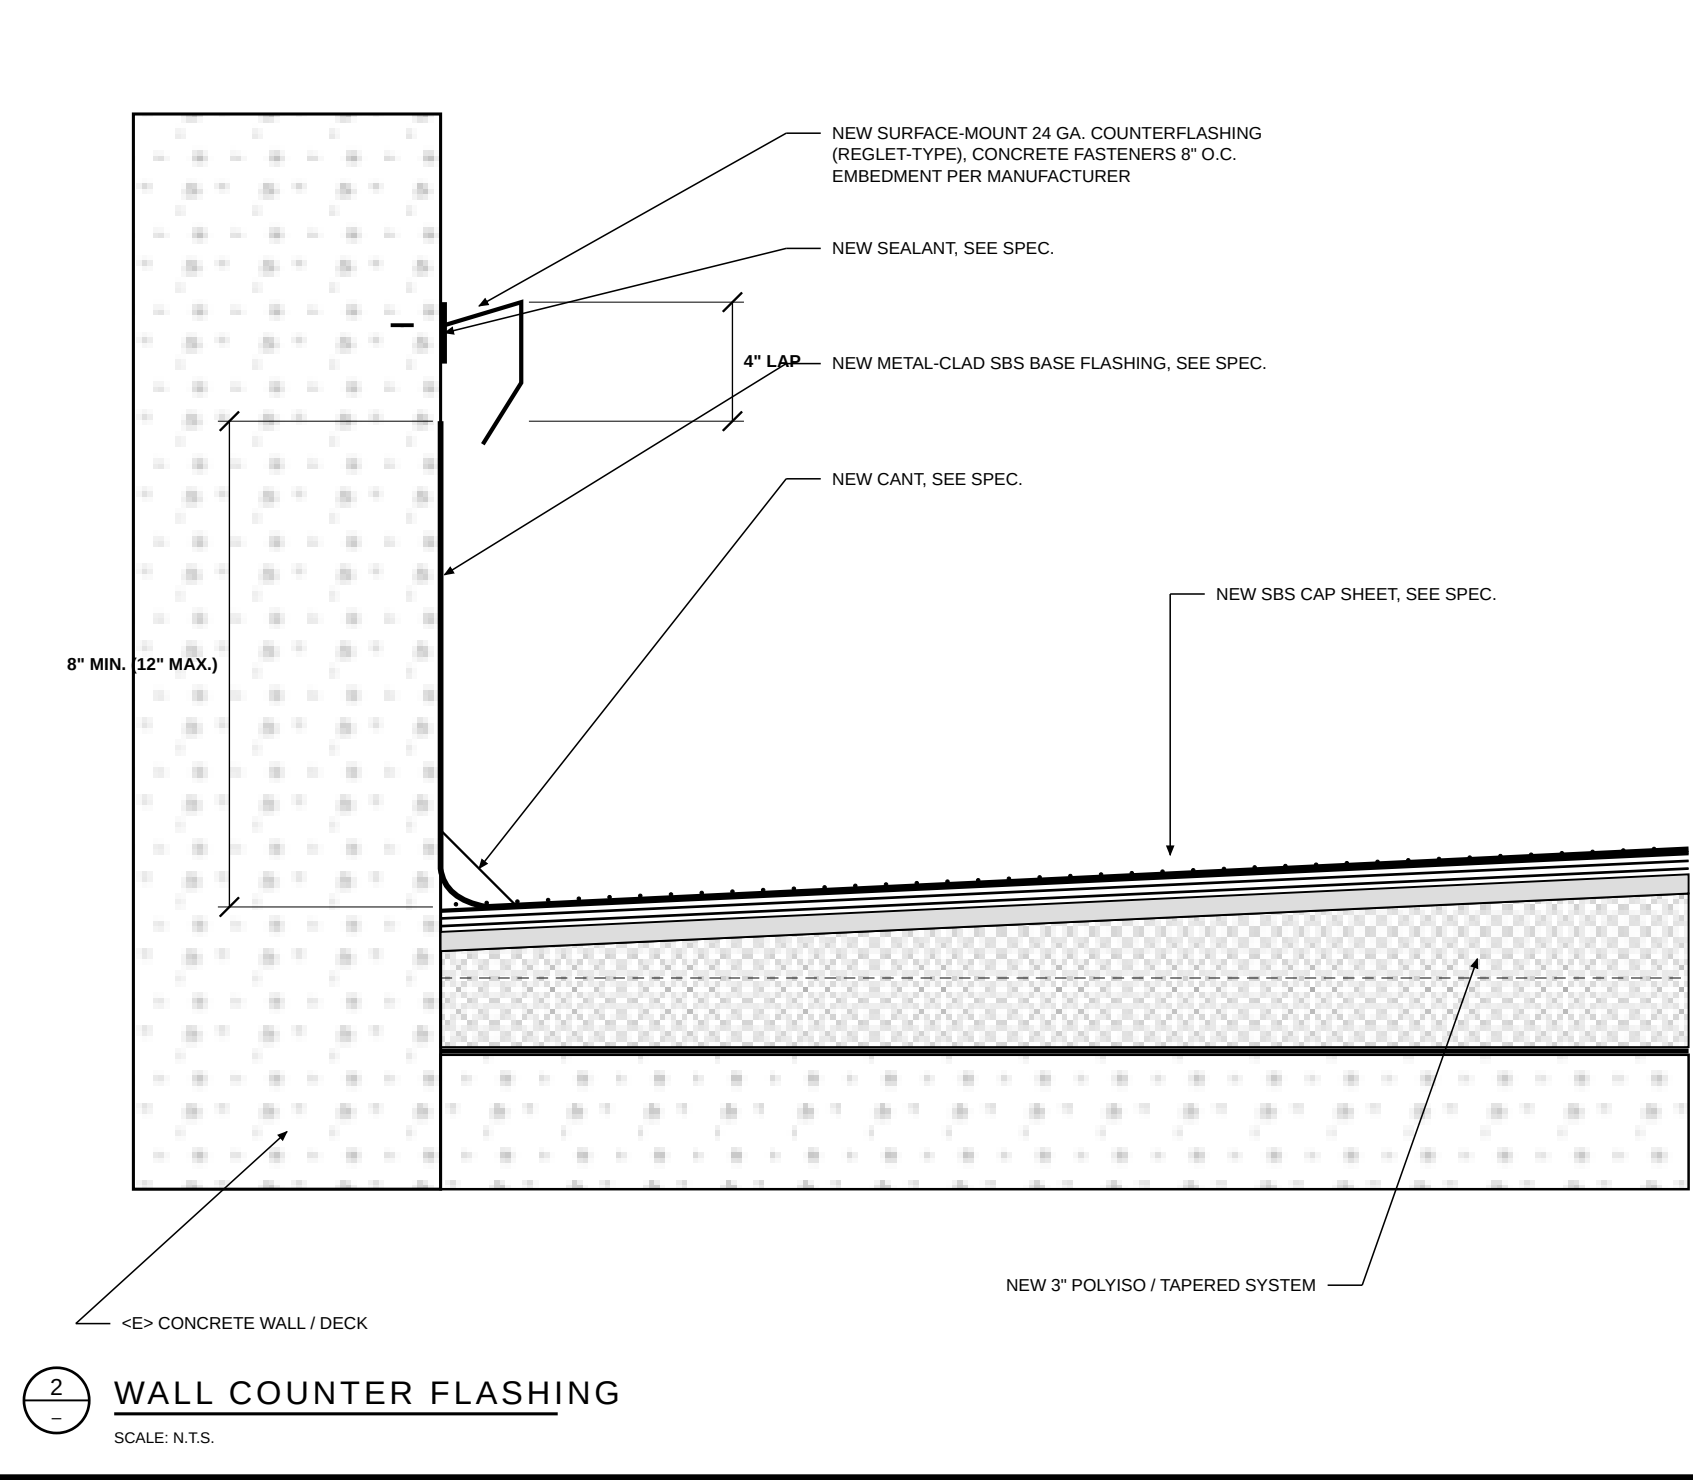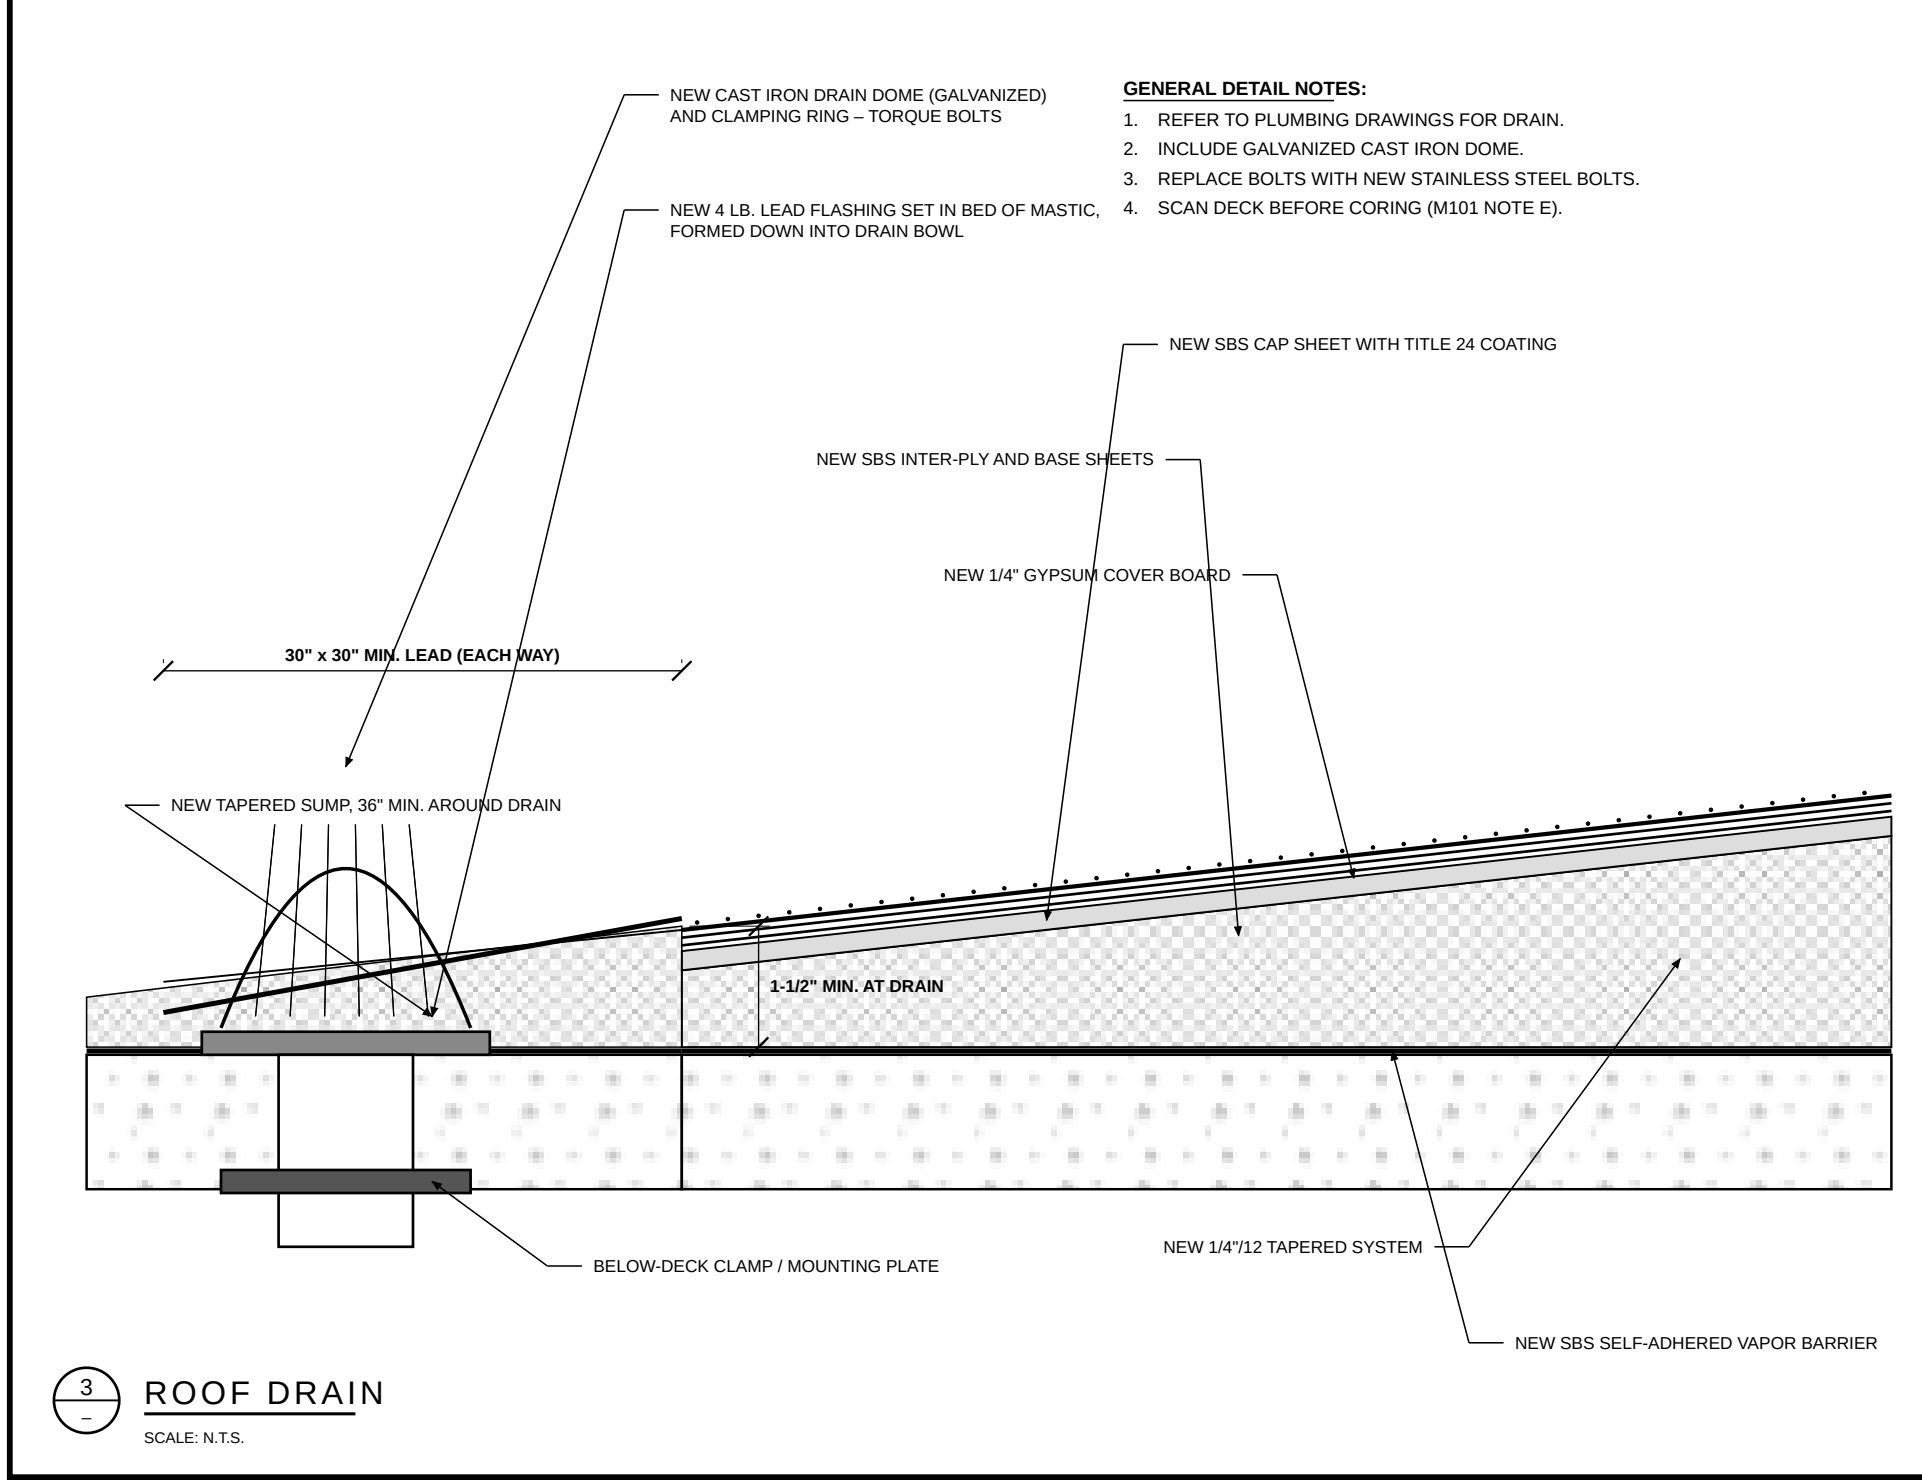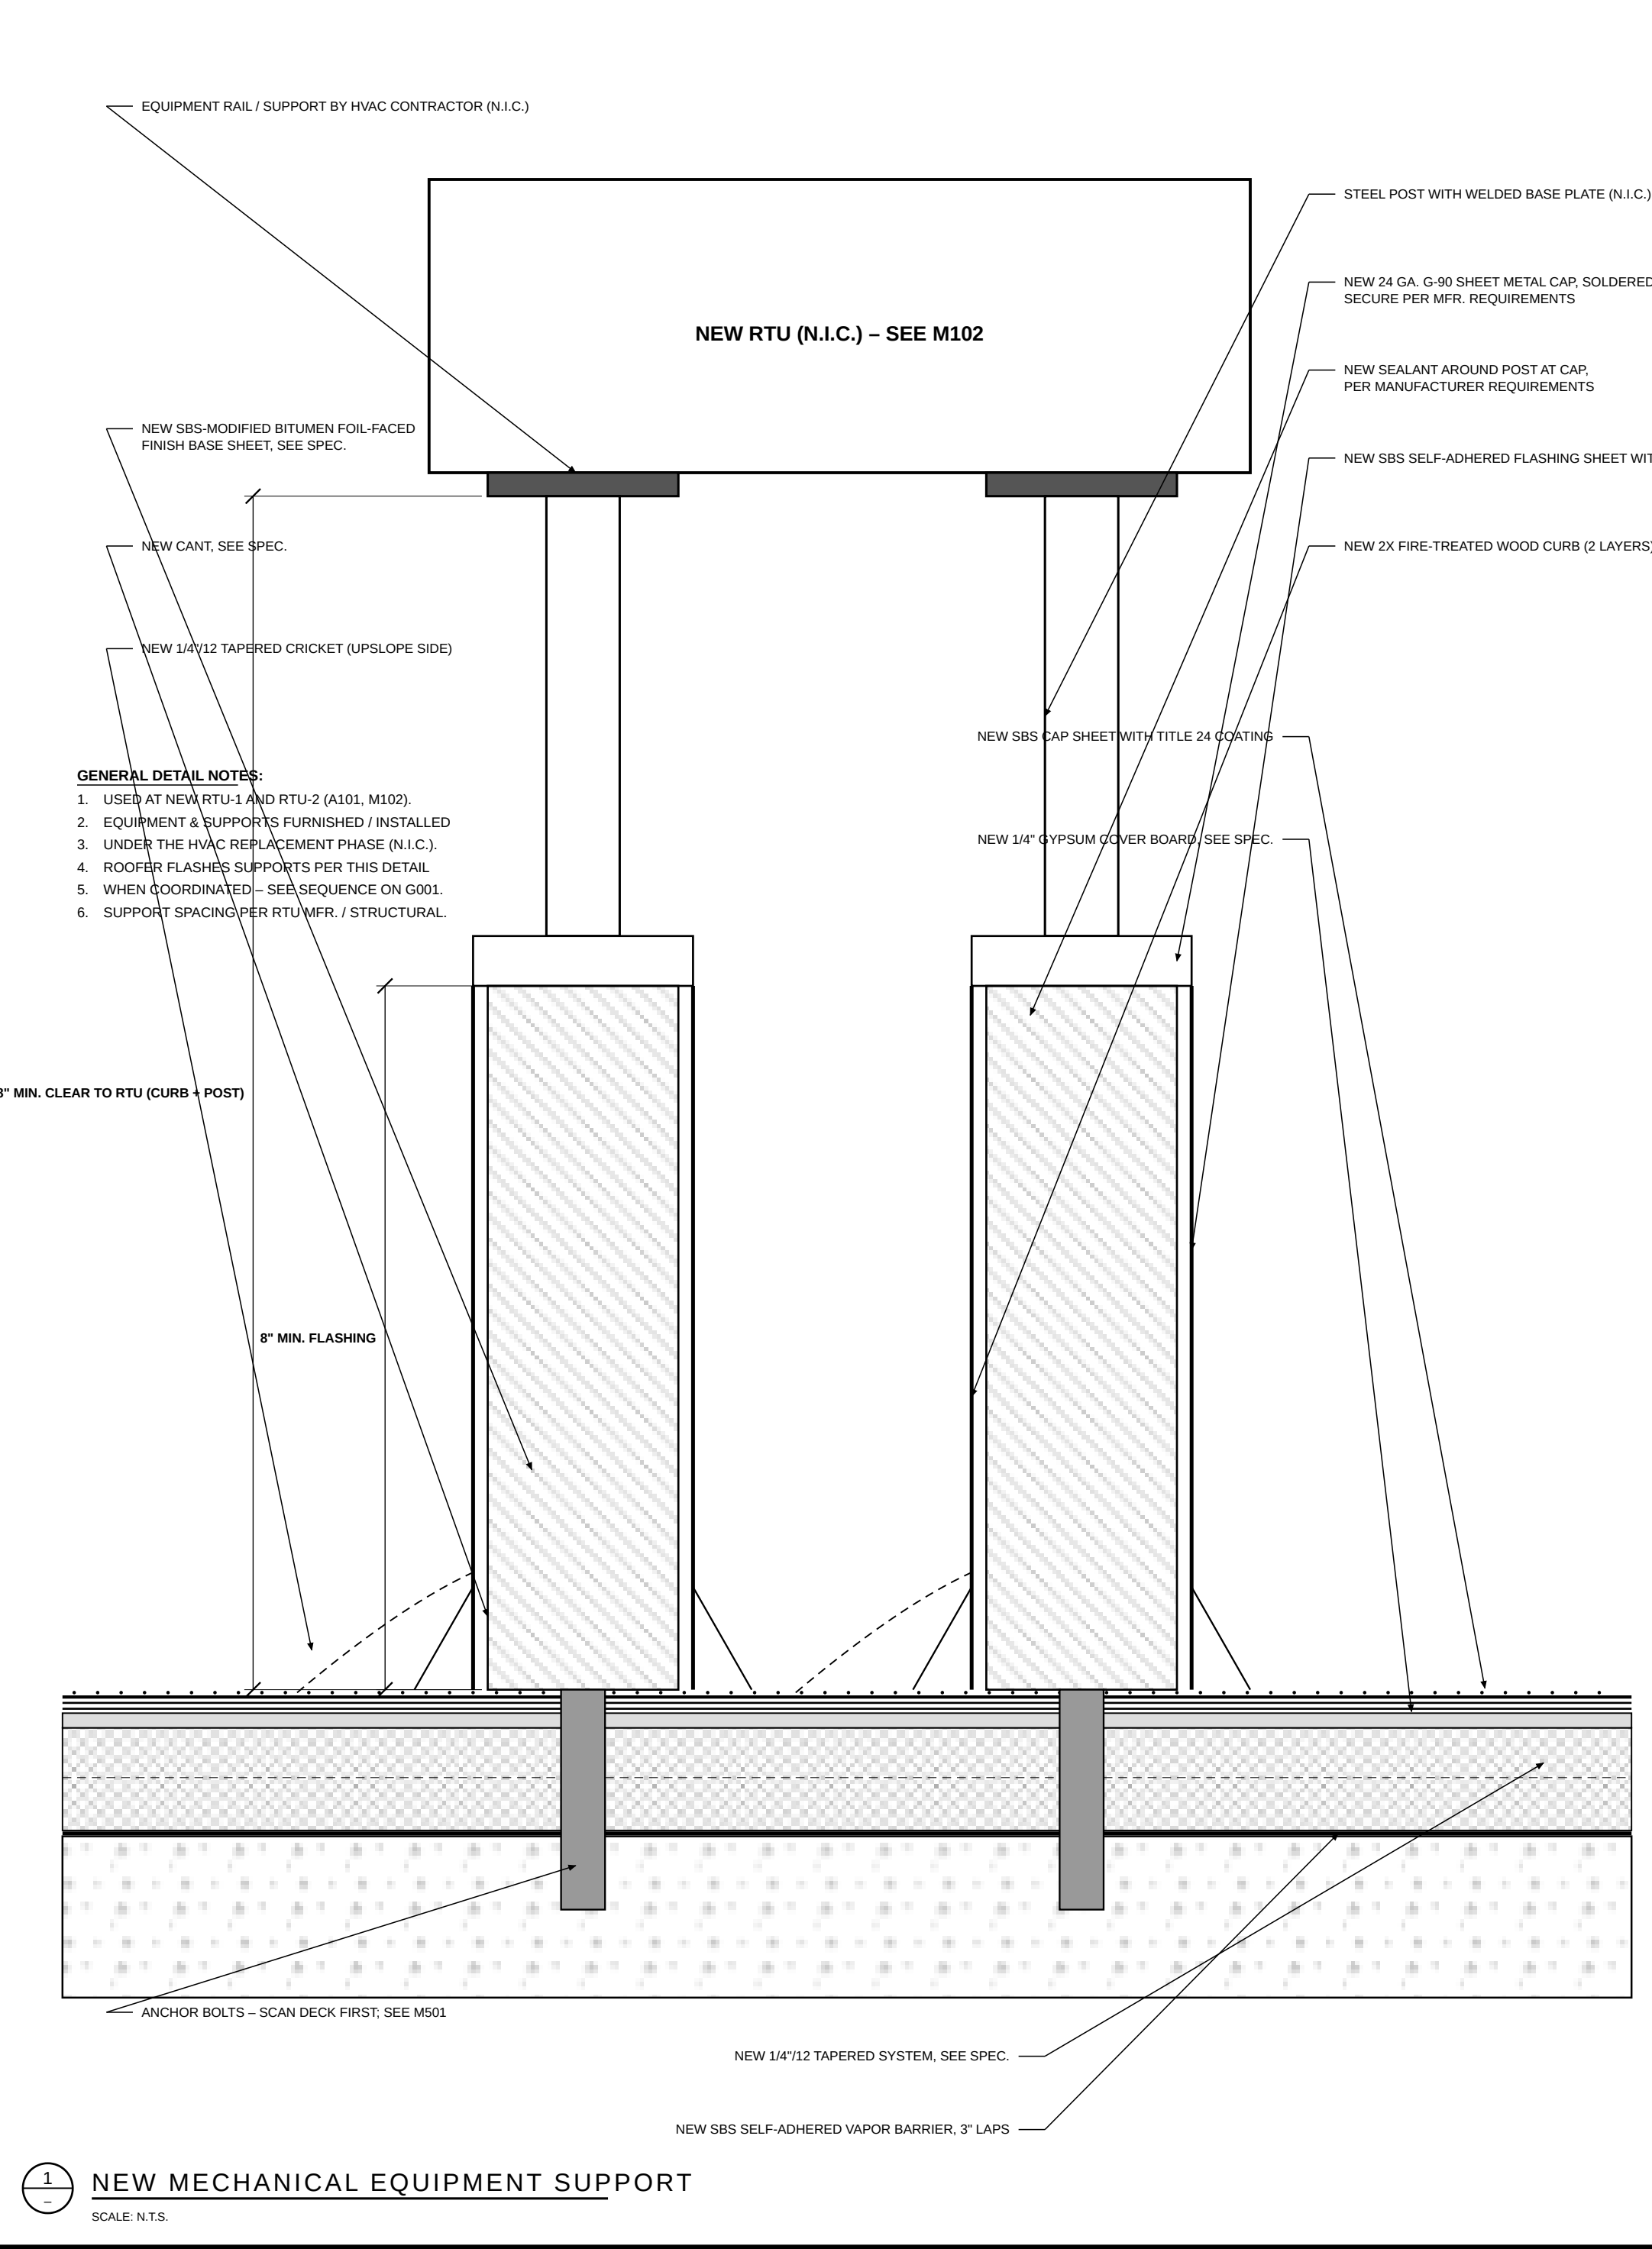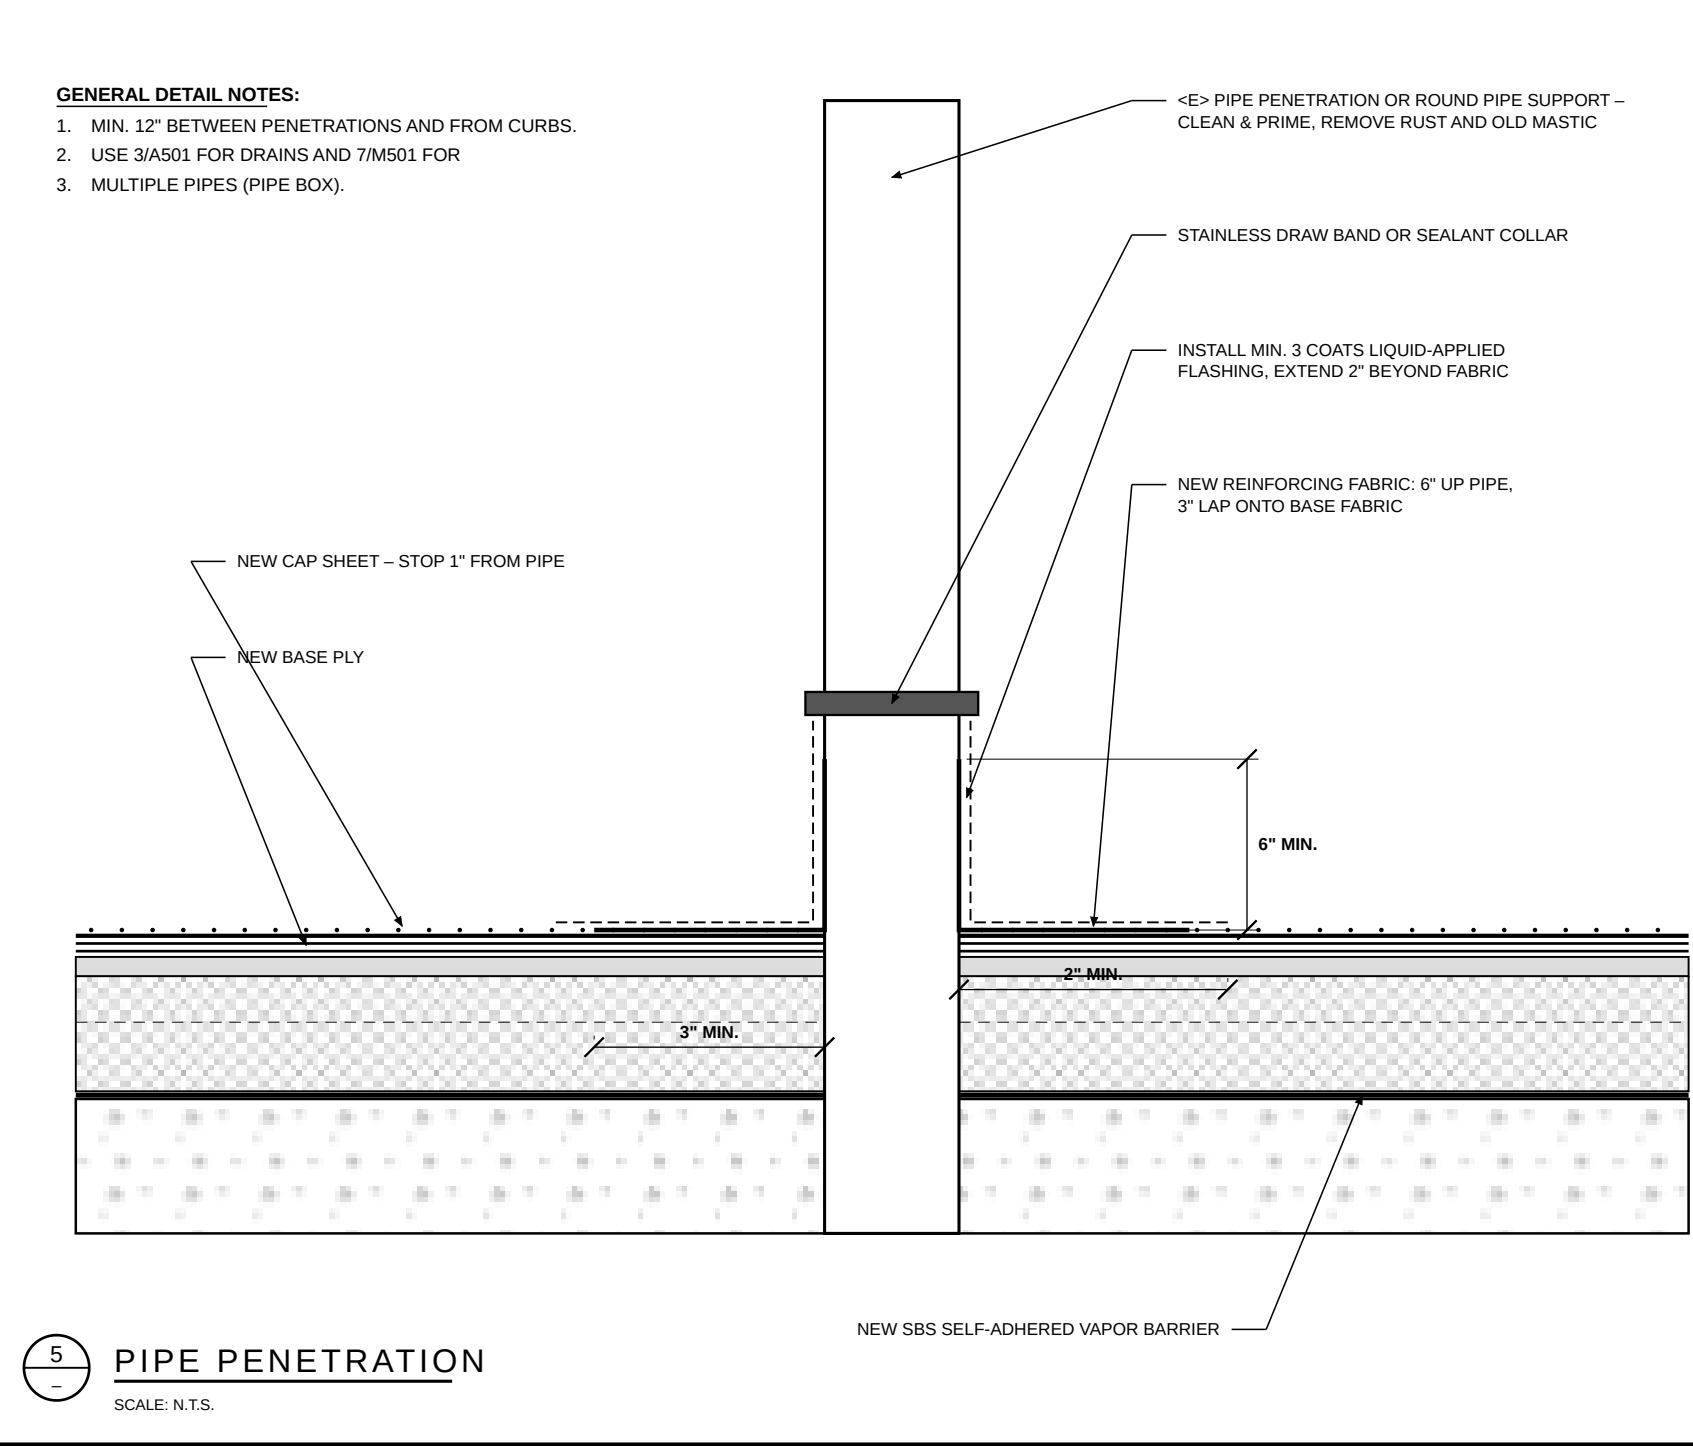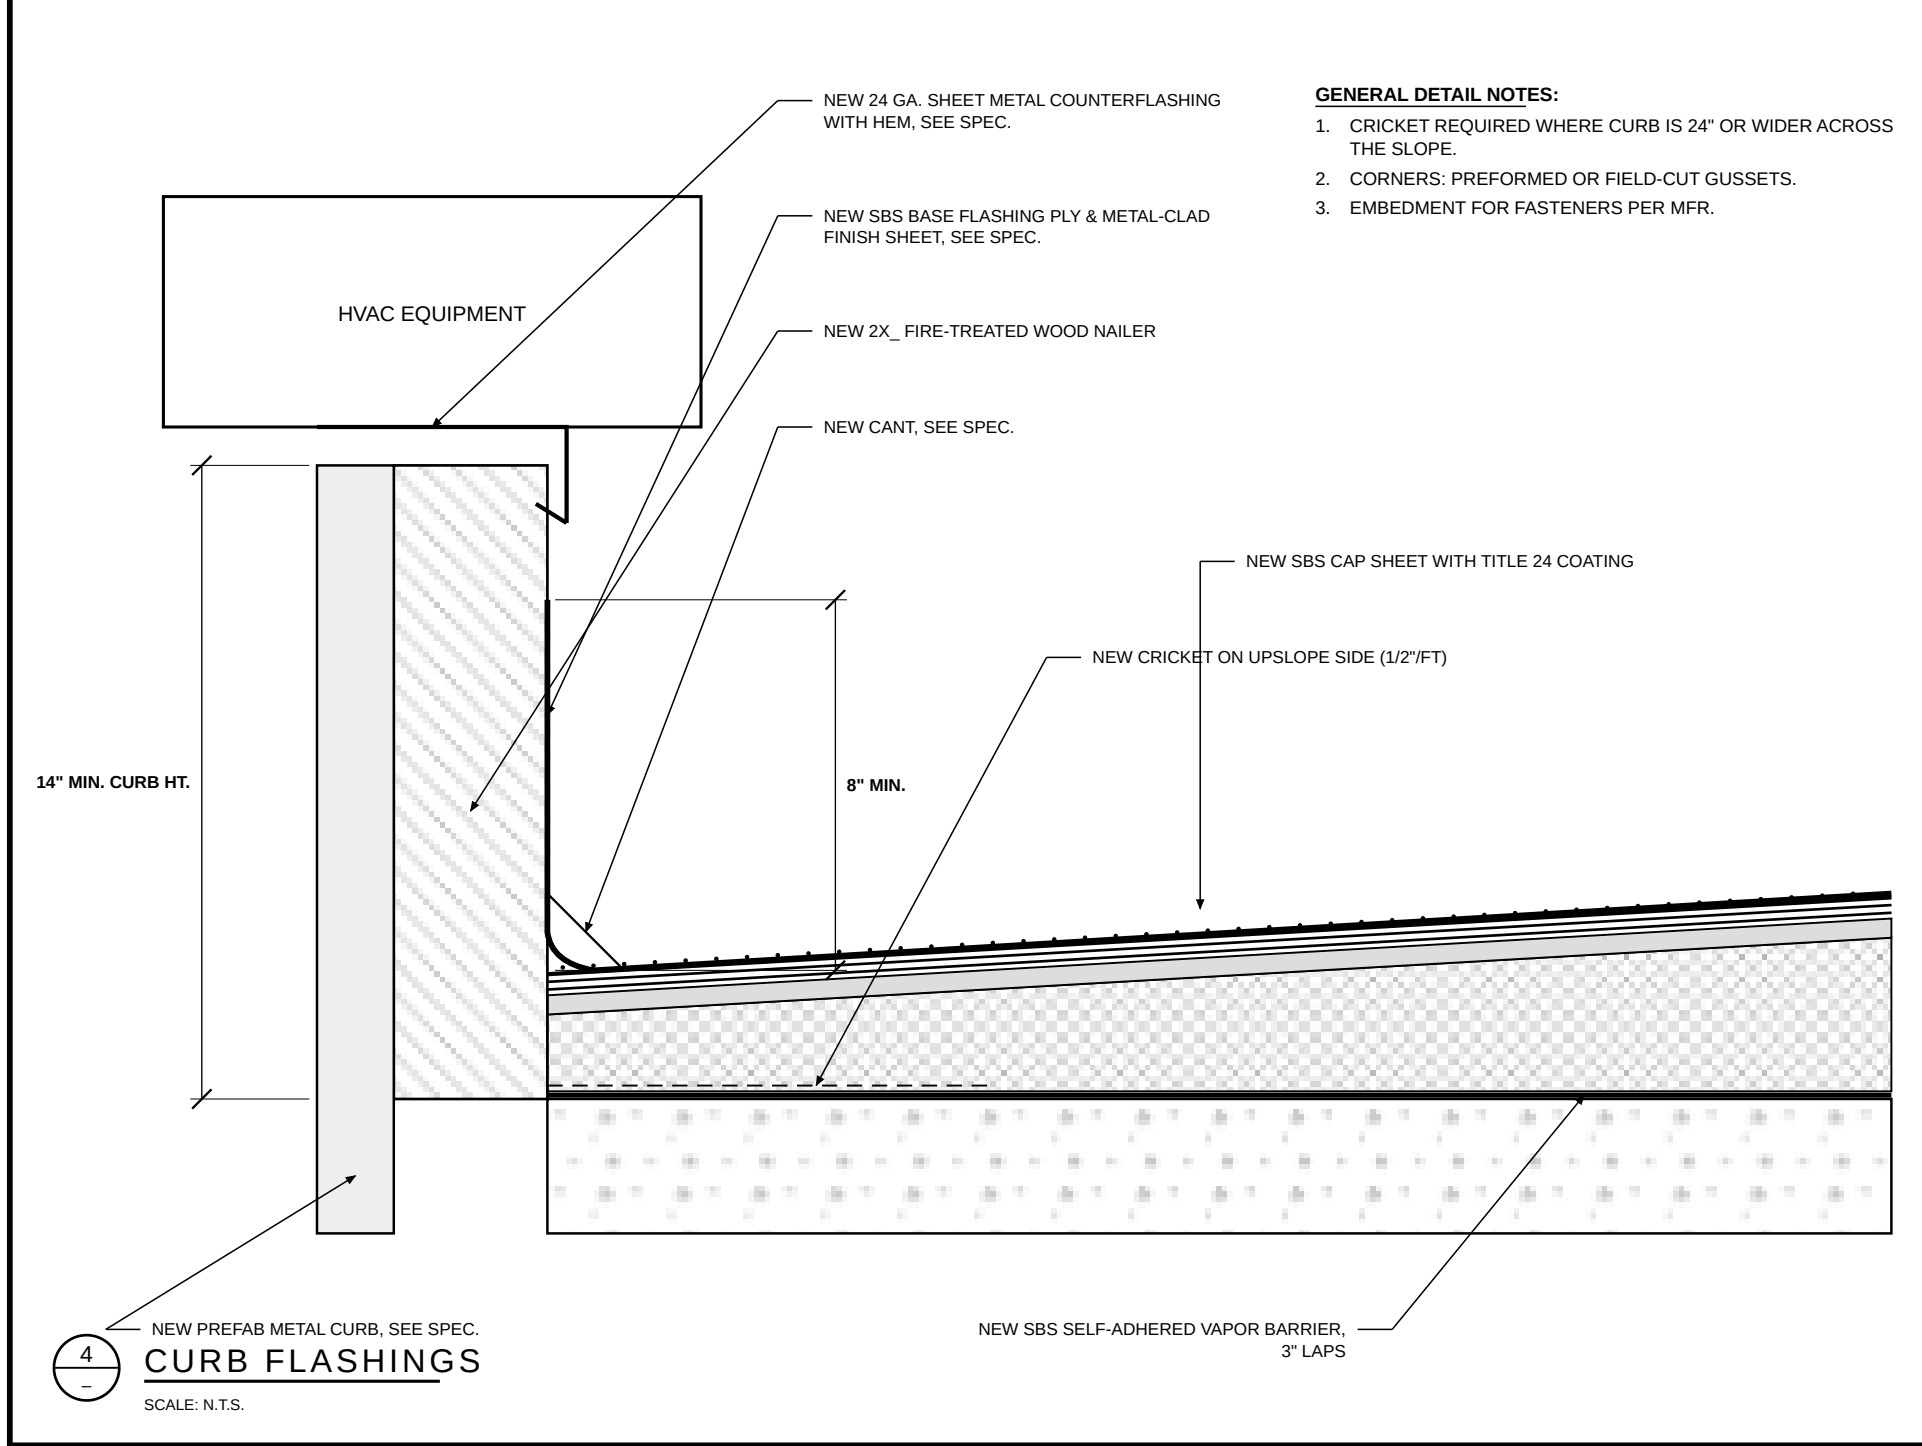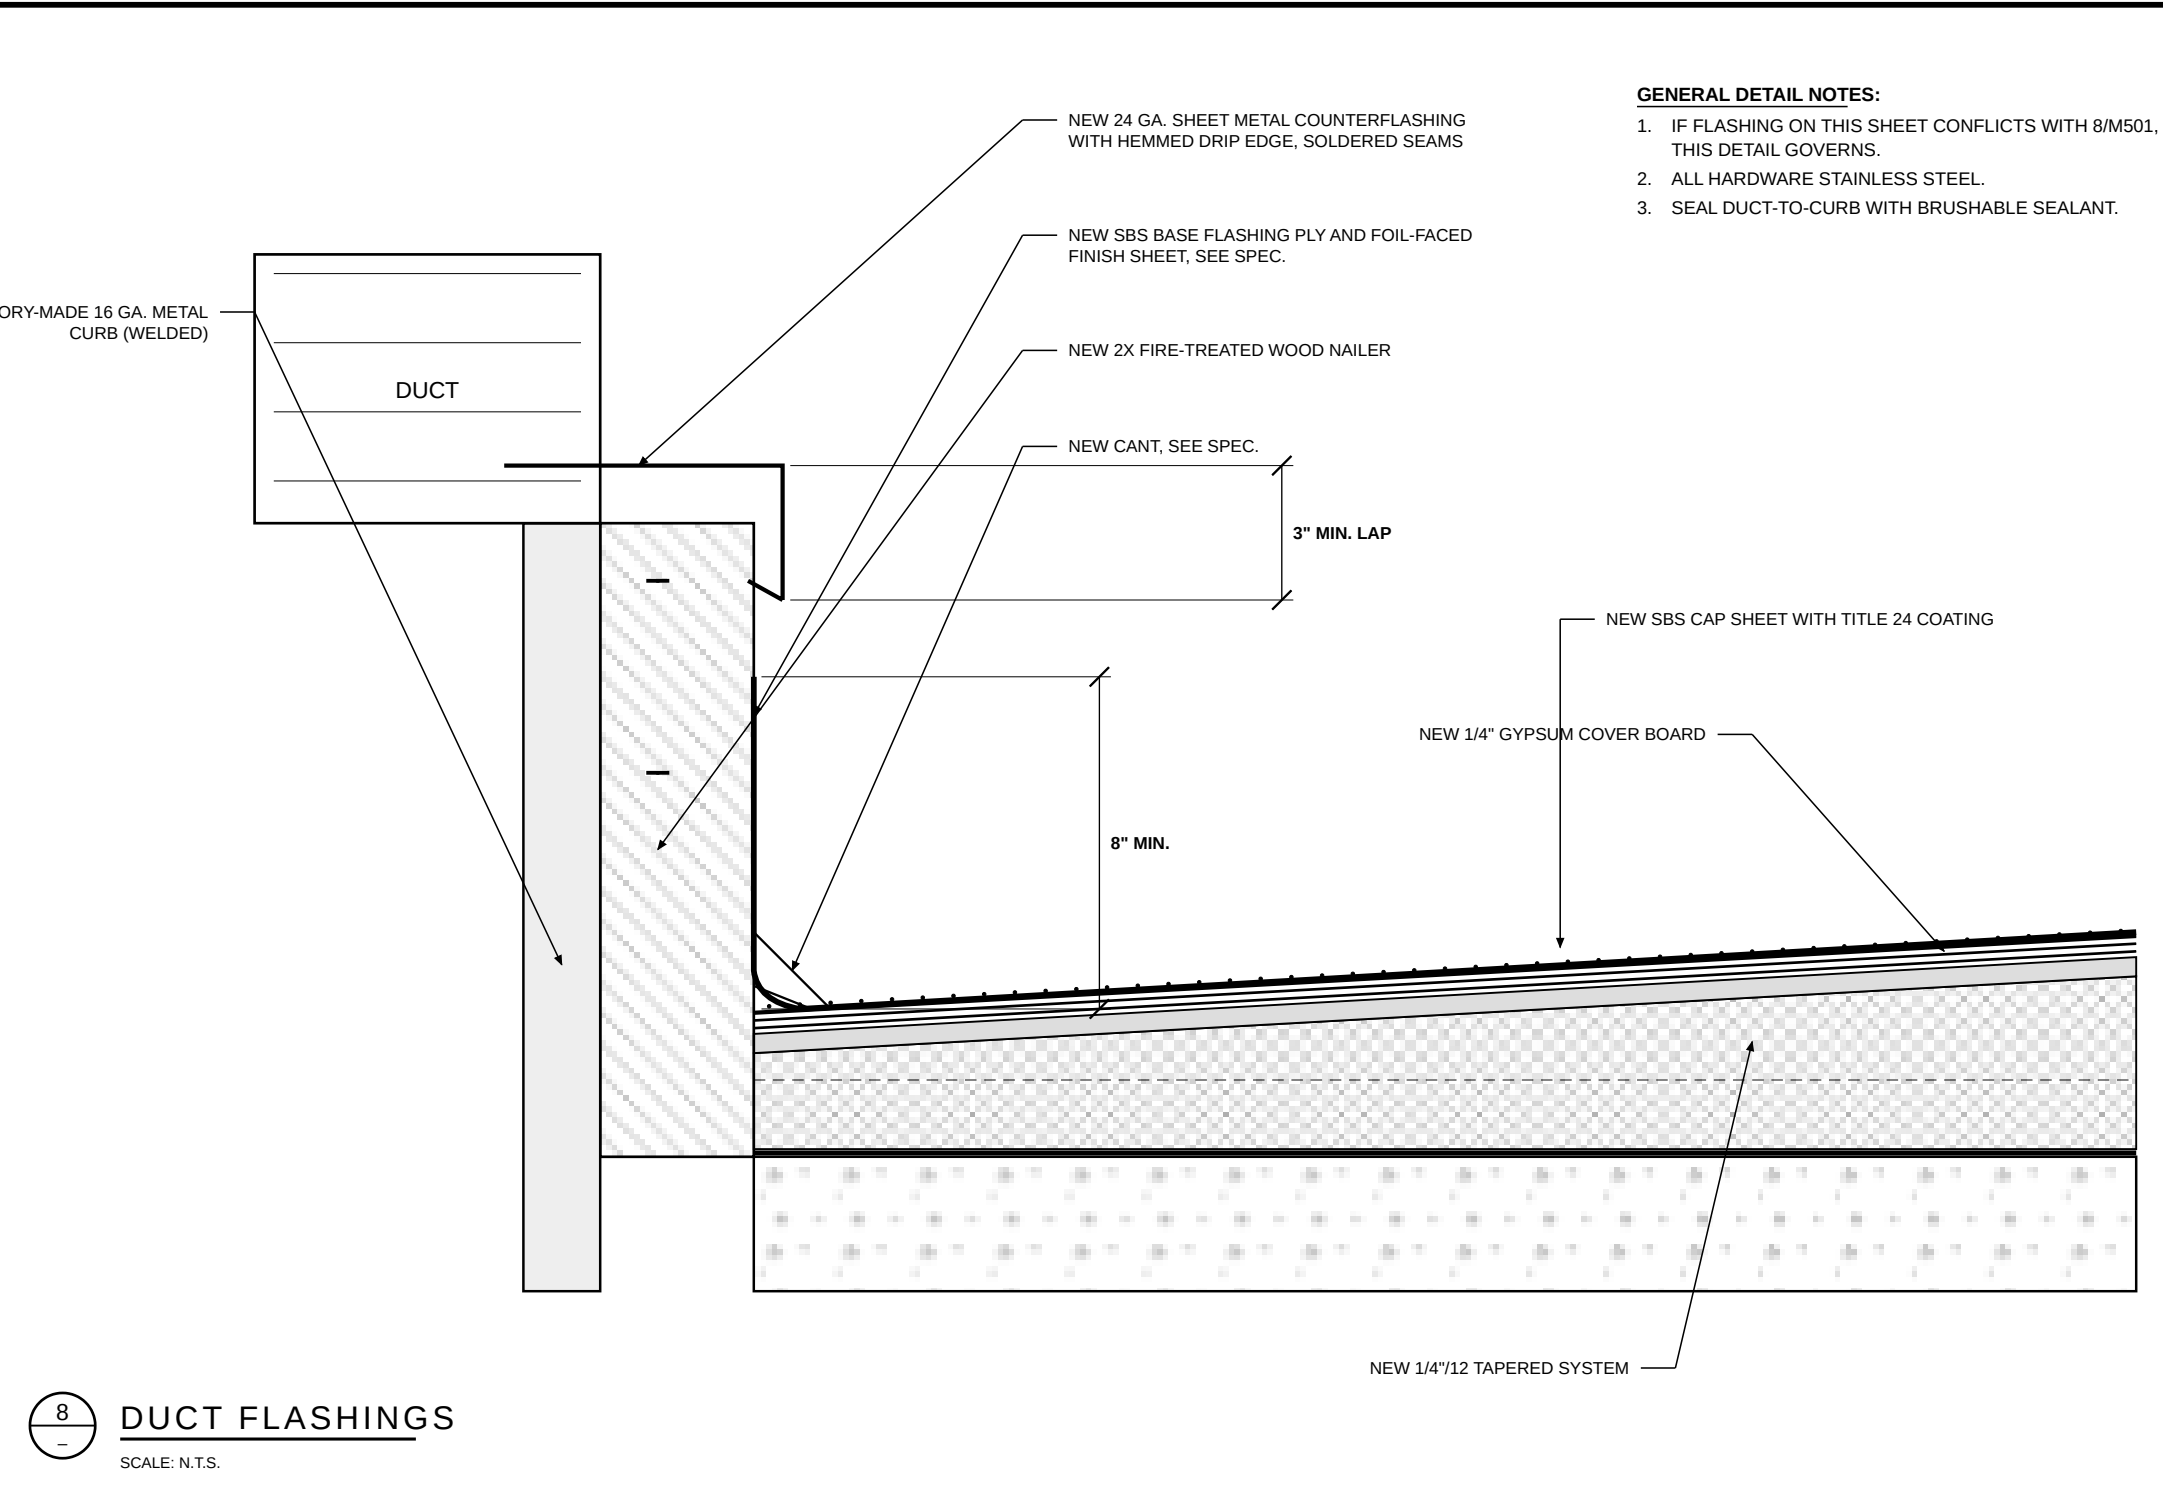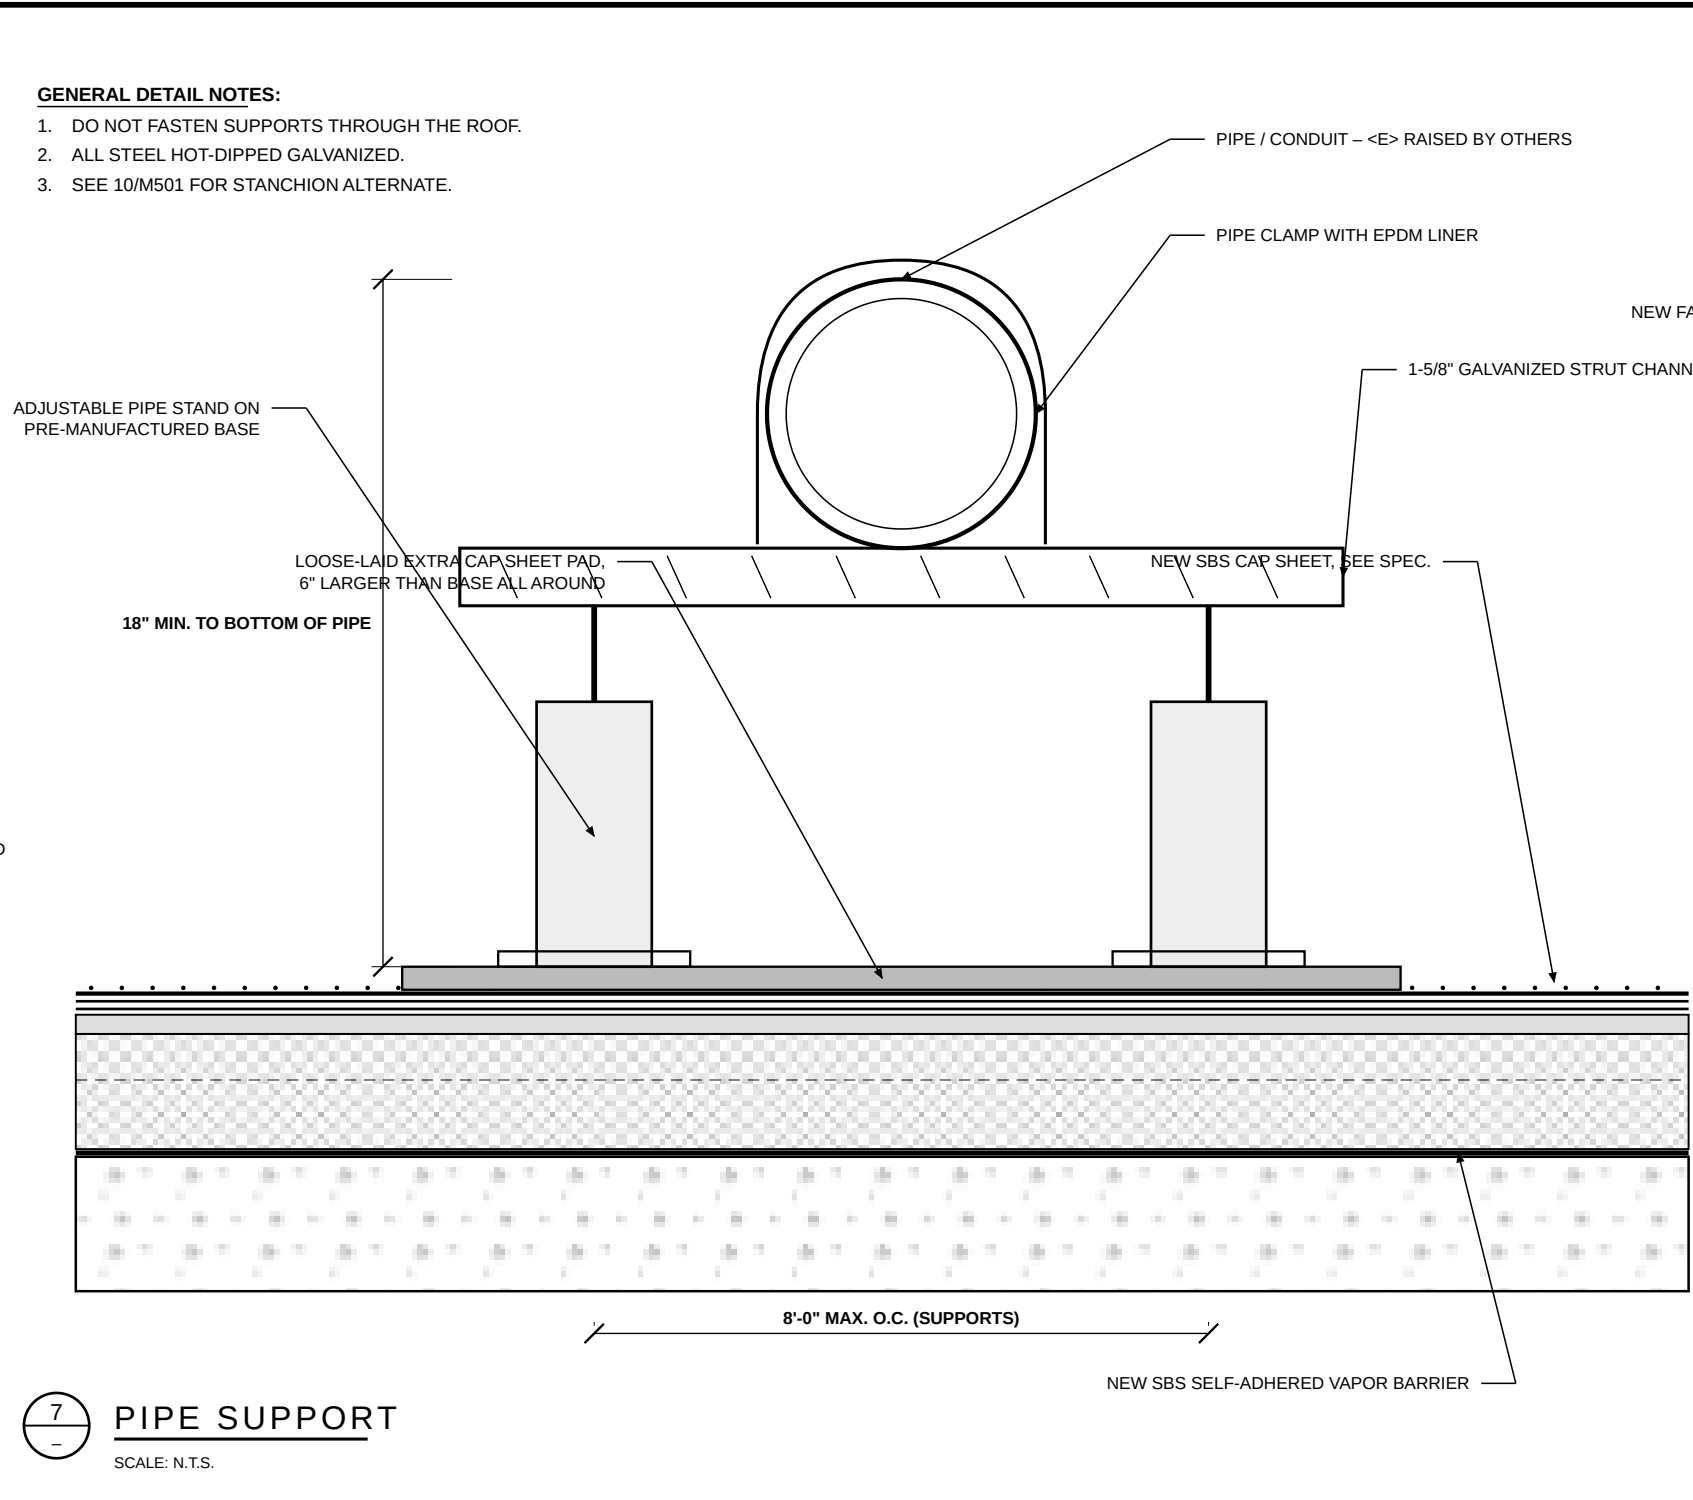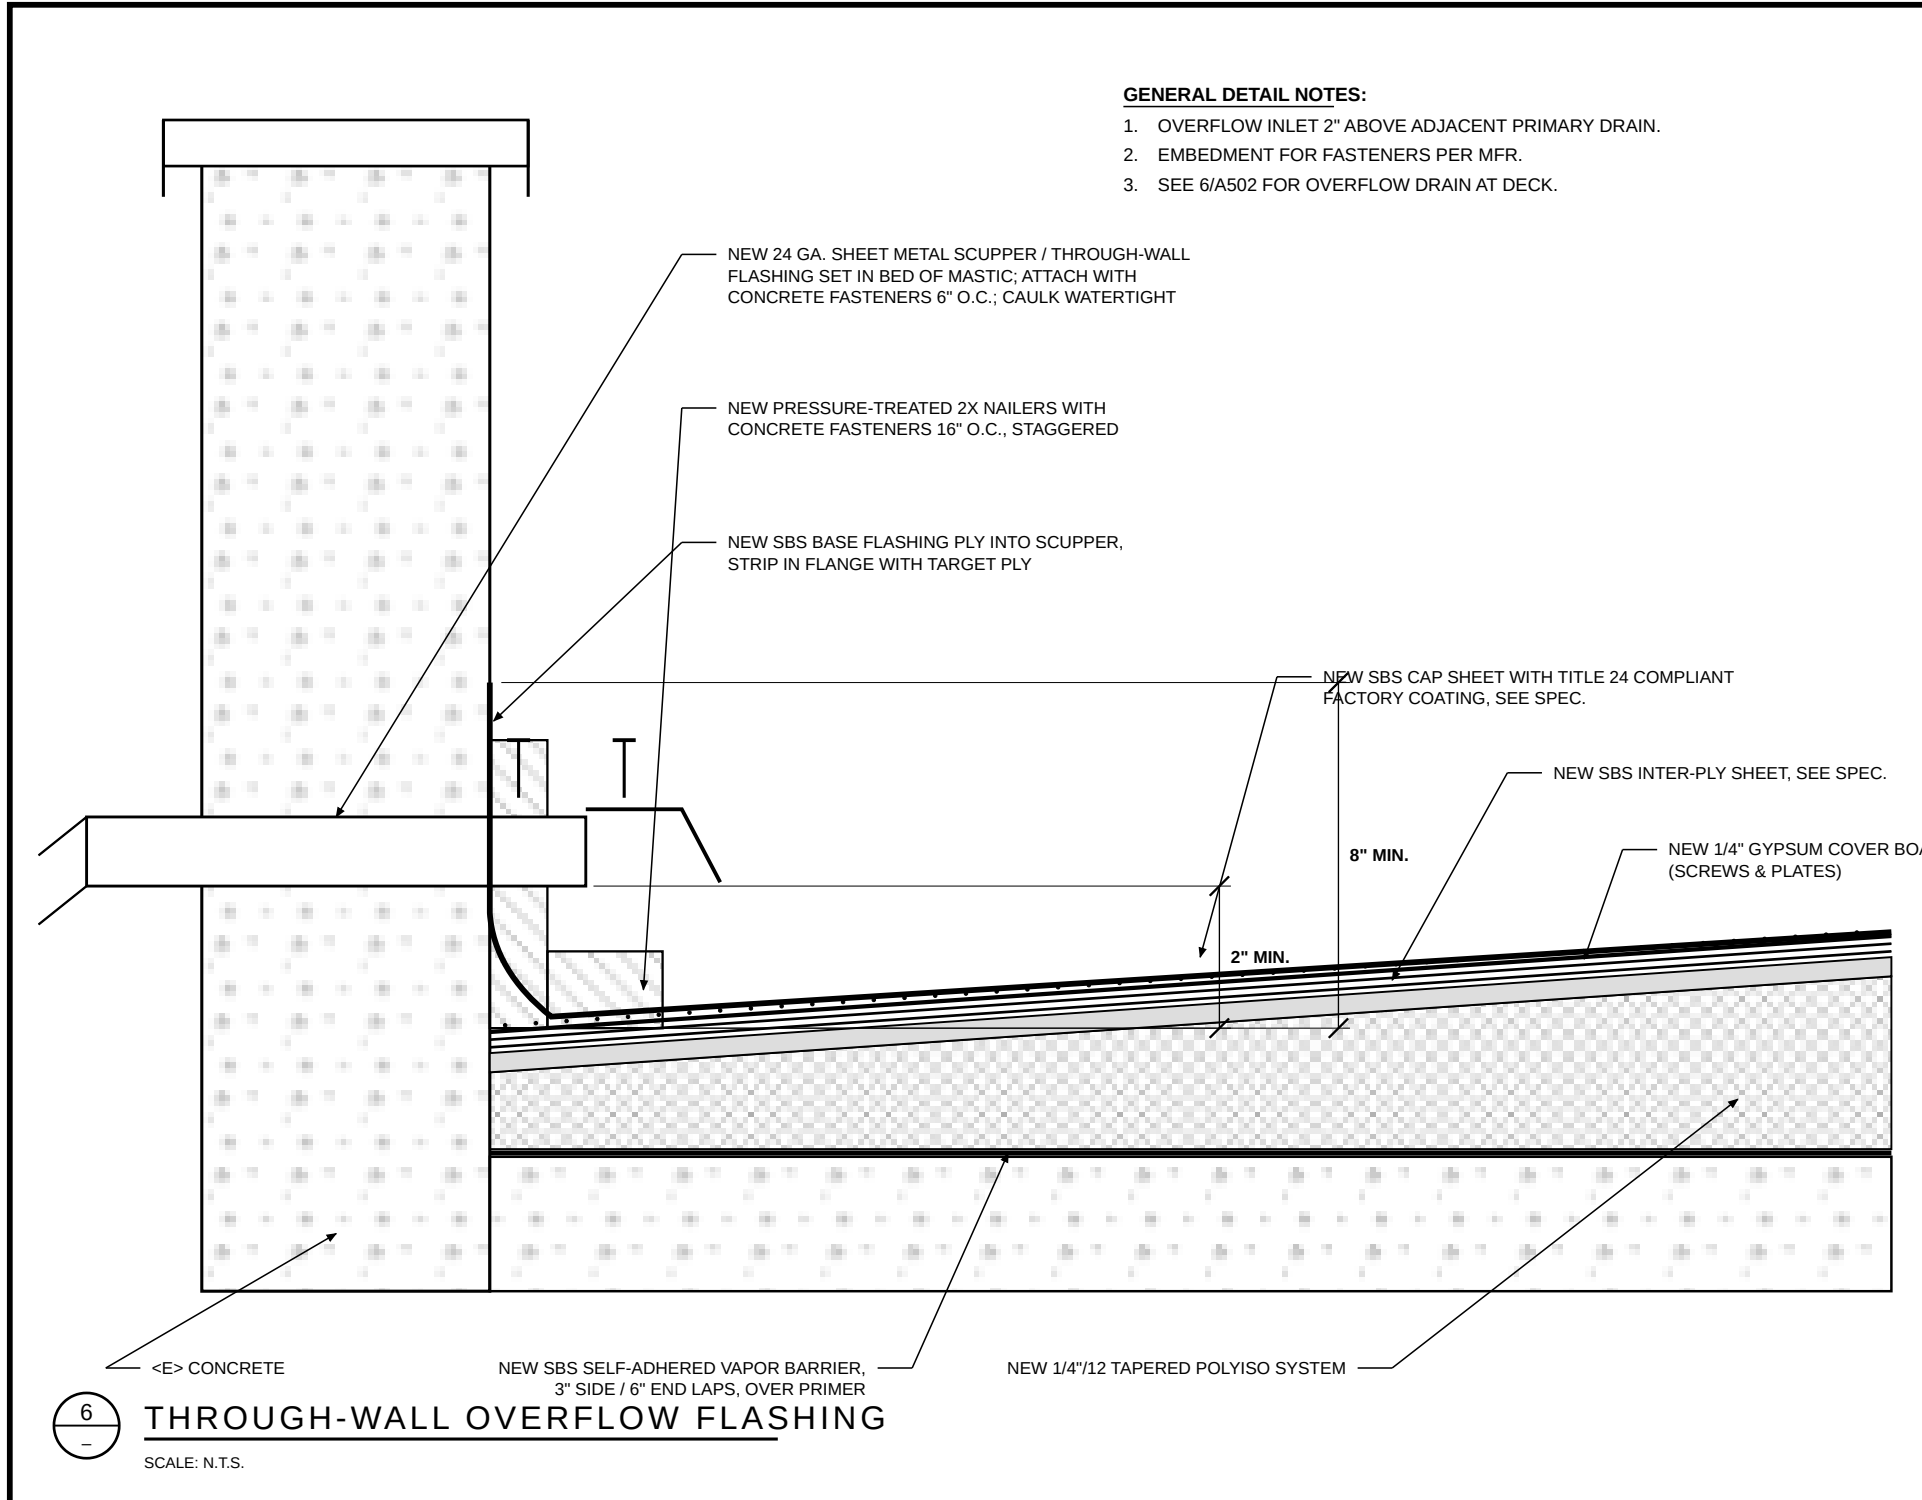

TRAINING DOCUMENT

FICTIONAL PROJECT - NOT FOR CONSTRUCTION

FOR APPRENTICE BLUEPRINT READING ONLY

SRC

SIERRA ROOF CONSULTING, INC.

ROOFING & WATERPROOFING CONSULTANTS

1100 E. PRACTICE WAY, SUITE 27 - FRESNO, CA 93700

OFFICE (559) 555-0142

CONSULTANT STAMP
(PRACTICE SET - NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
1	REVIEW SET	08/03/26	SRC
2	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY

ROOFERS & WATERPROOFERS

JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER

ROOF REPLACEMENT

5537 E. LAMONA AVE. #1

FRESNO, CA 93727

SHEET TITLE:

DETAILS

ARCHITECTURAL

JATC PROJECT NO.

JATC-26-07

DATE: 08/24/26

DRAWN BY: SRC

SCALE: AS NOTED


CHECKED: JR

PRACTICE SET

3A - INTRO TO PLANS

SHEET NO.

A501

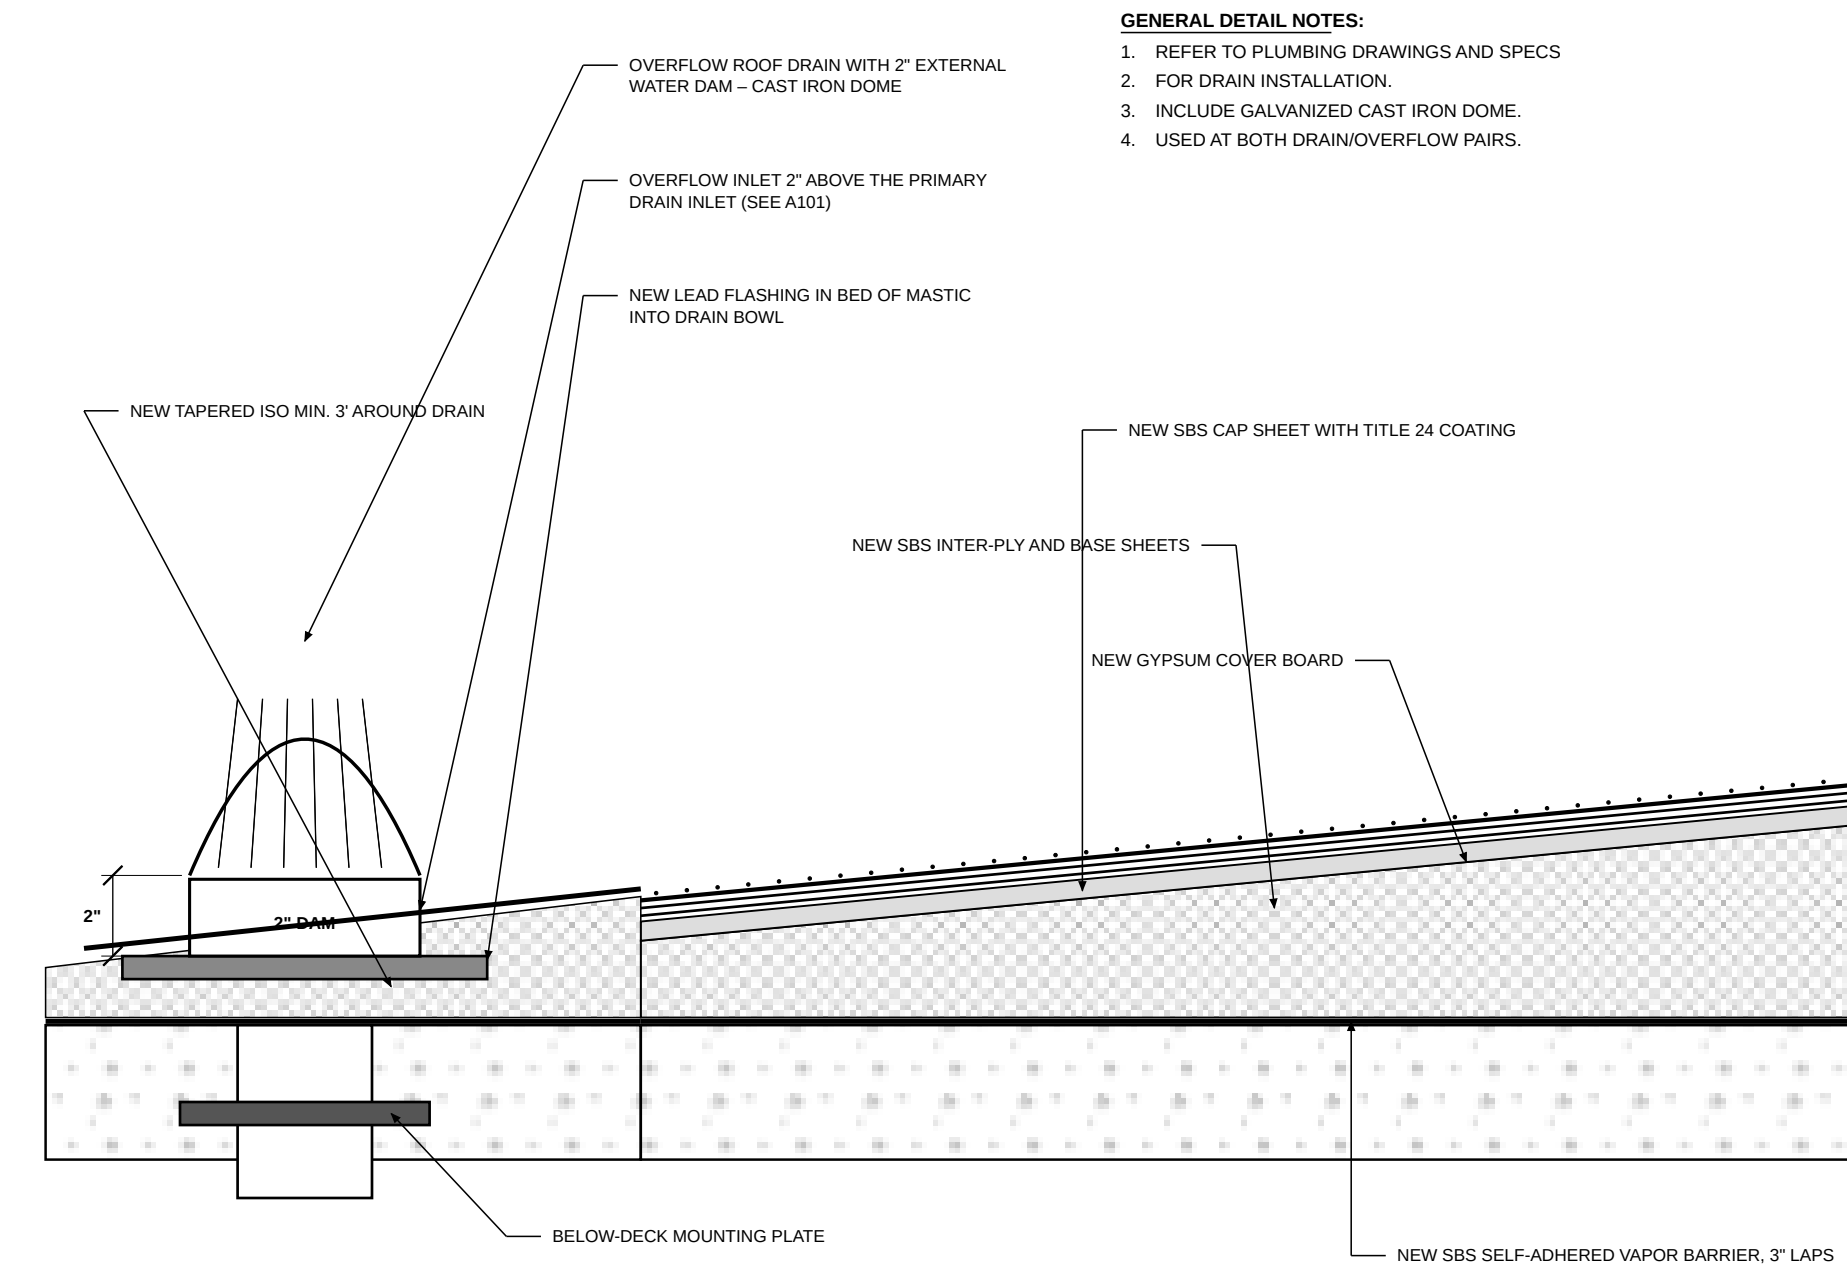

6 ROOF DRAIN OVERFLOW



7 EXISTING CONDITION: EQUIPMENT & CABLES



8 EXISTING CONDITION: BUILDING EXTERIOR

TRAINING DOCUMENT

FICTIONAL PROJECT - NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

SRC

SIERRA ROOF CONSULTING, INC.
ROOFING & WATERPROOFING CONSULTANTS
1100 E. PRACTICE WAY, SUITE 27 - FRESNO, CA 93700
OFFICE (559) 555-0142

CONSULTANT STAMP
(PRACTICE SET - NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
REVIEW SET		08/03/26	SRC
BID SET		08/24/26	SRC

OWNER:

CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727

SHEET TITLE:

DETAILS
ARCHITECTURAL



4 EXISTING CONDITION: PENTHOUSE




5 EXISTING CONDITION: PENTHOUSE BASE



3 NEW RTUS ON CURBS (IN PROGRESS)




2 EXISTING CONDITION: ROOF EDGE & LAPS

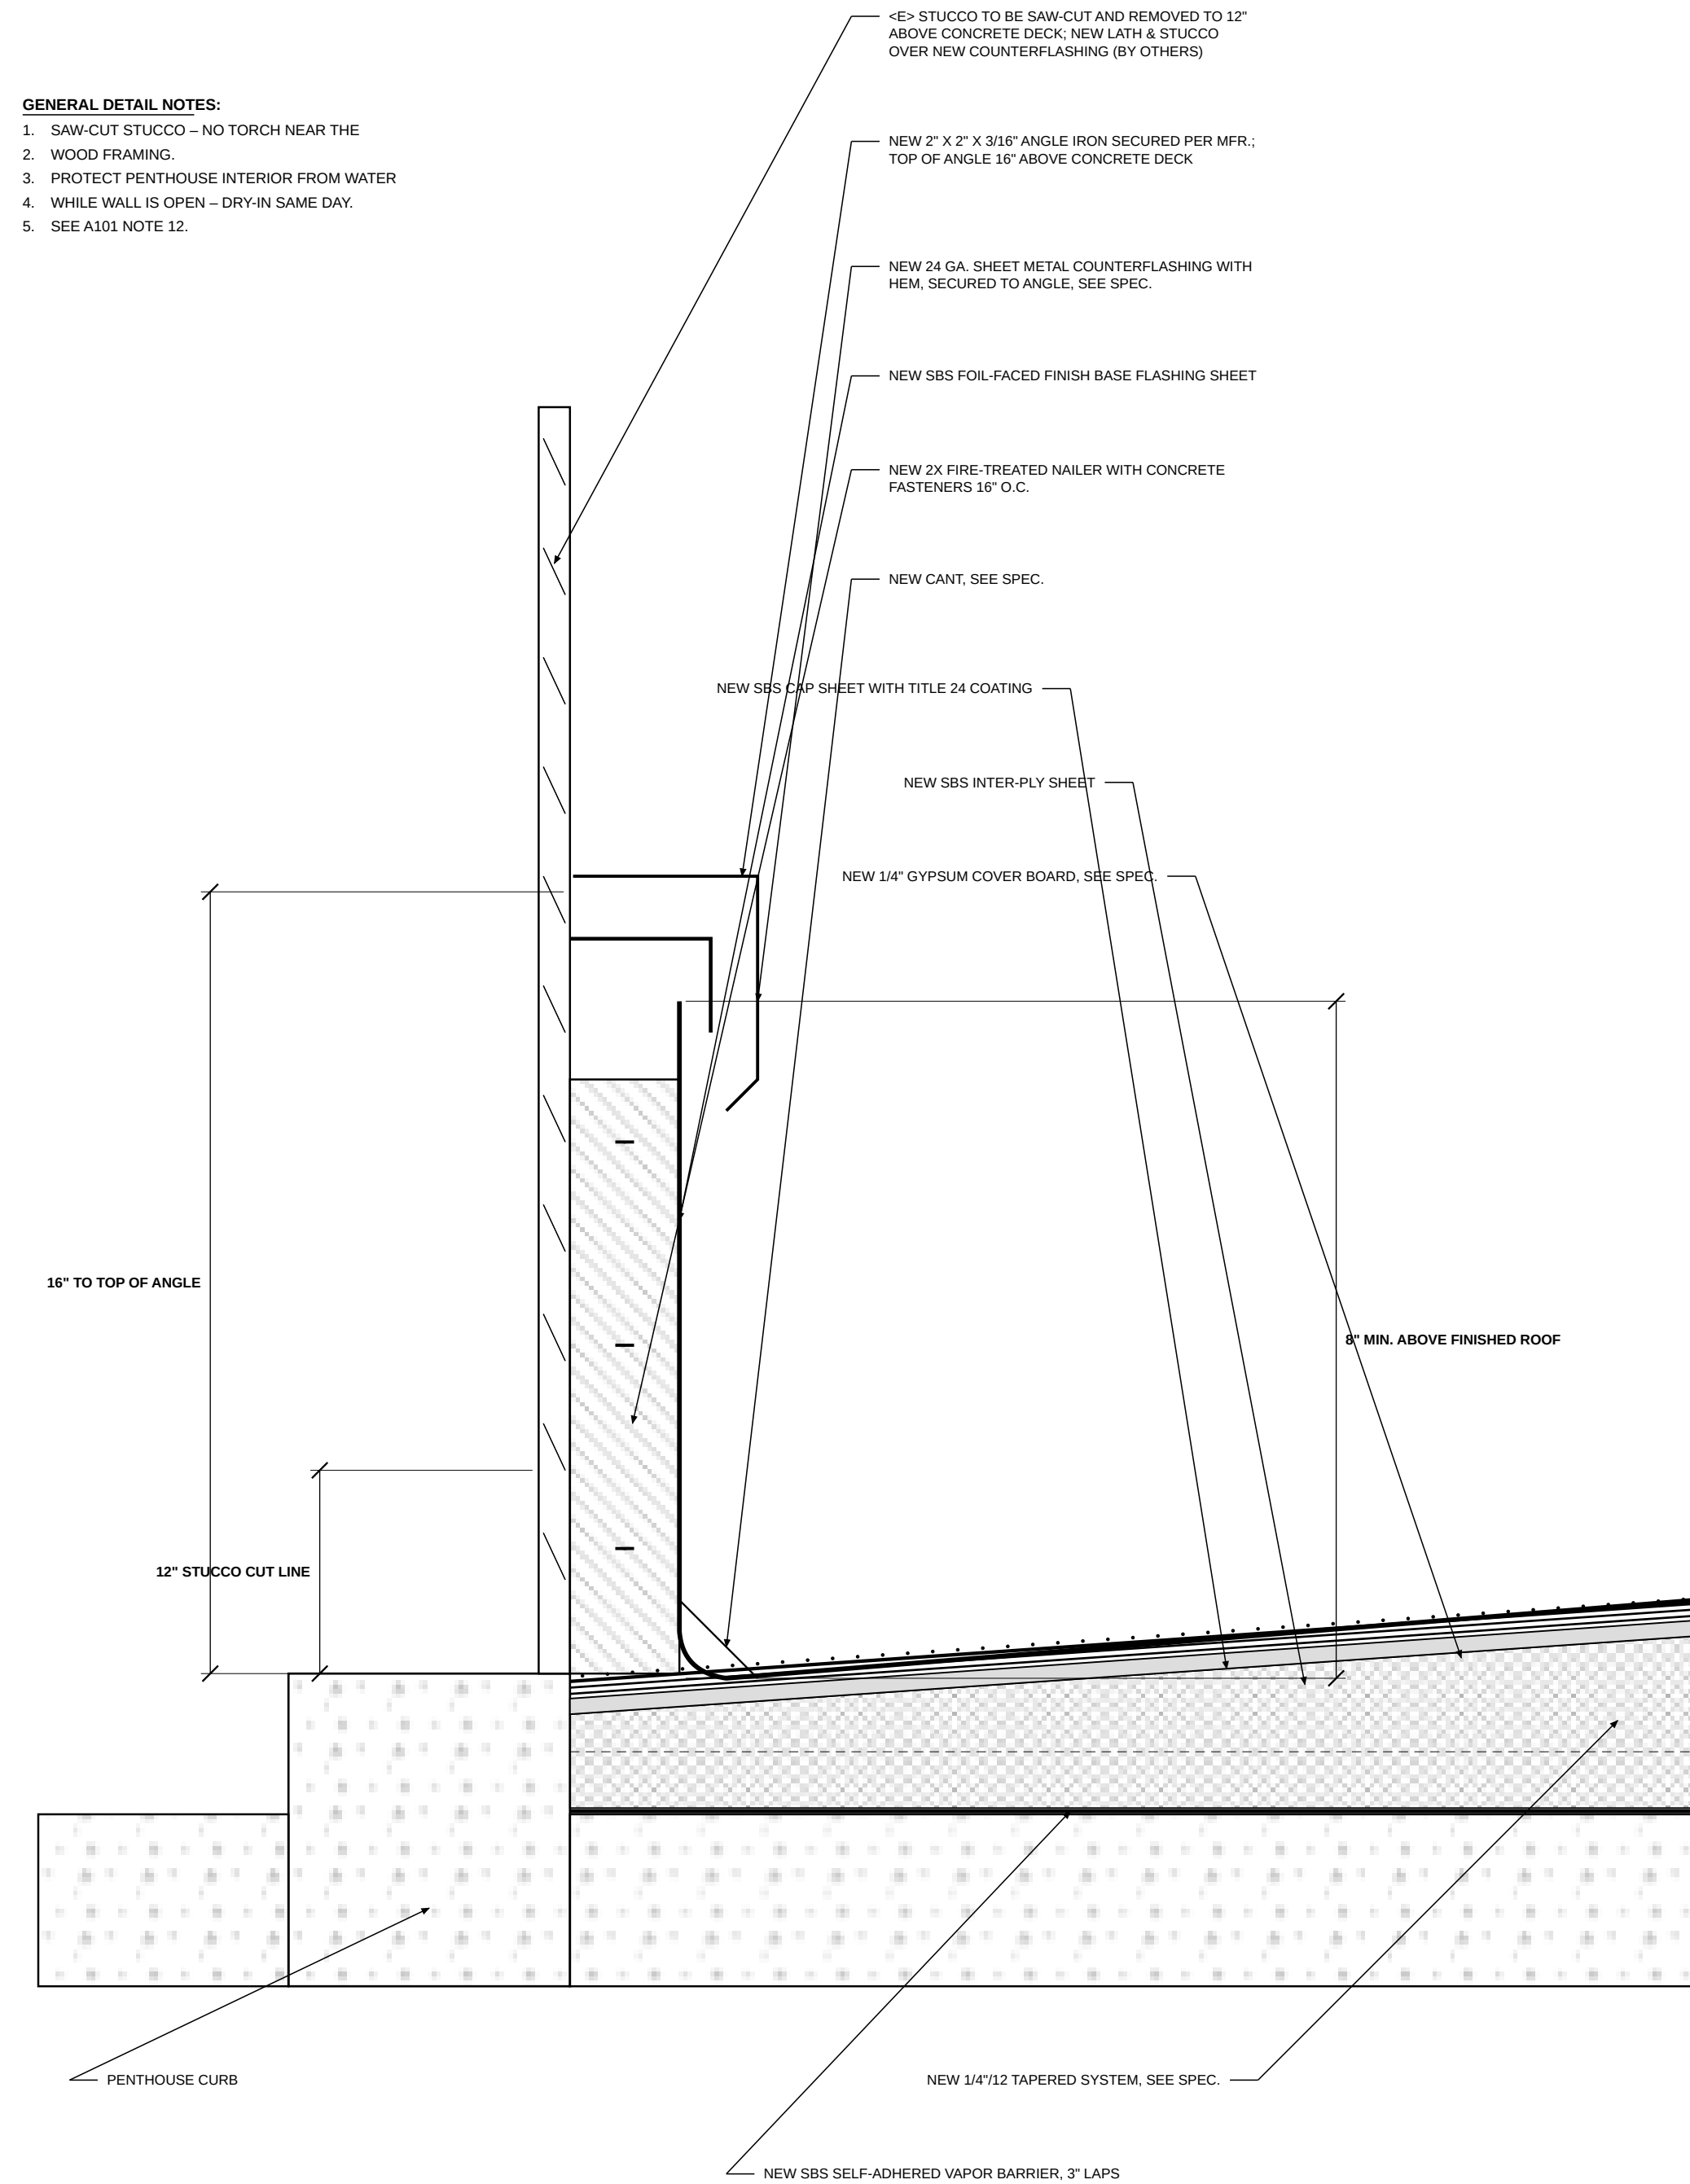


1 PENTHOUSE WALL DETAIL

JATC PROJECT NO. JATC-26-07	DATE: 08/24/26 DRAWN BY: SRC	SCALE: AS NOTED CHECKED: JR
PRACTICE SET 3A - INTRO TO PLANS		SHEET NO. A502

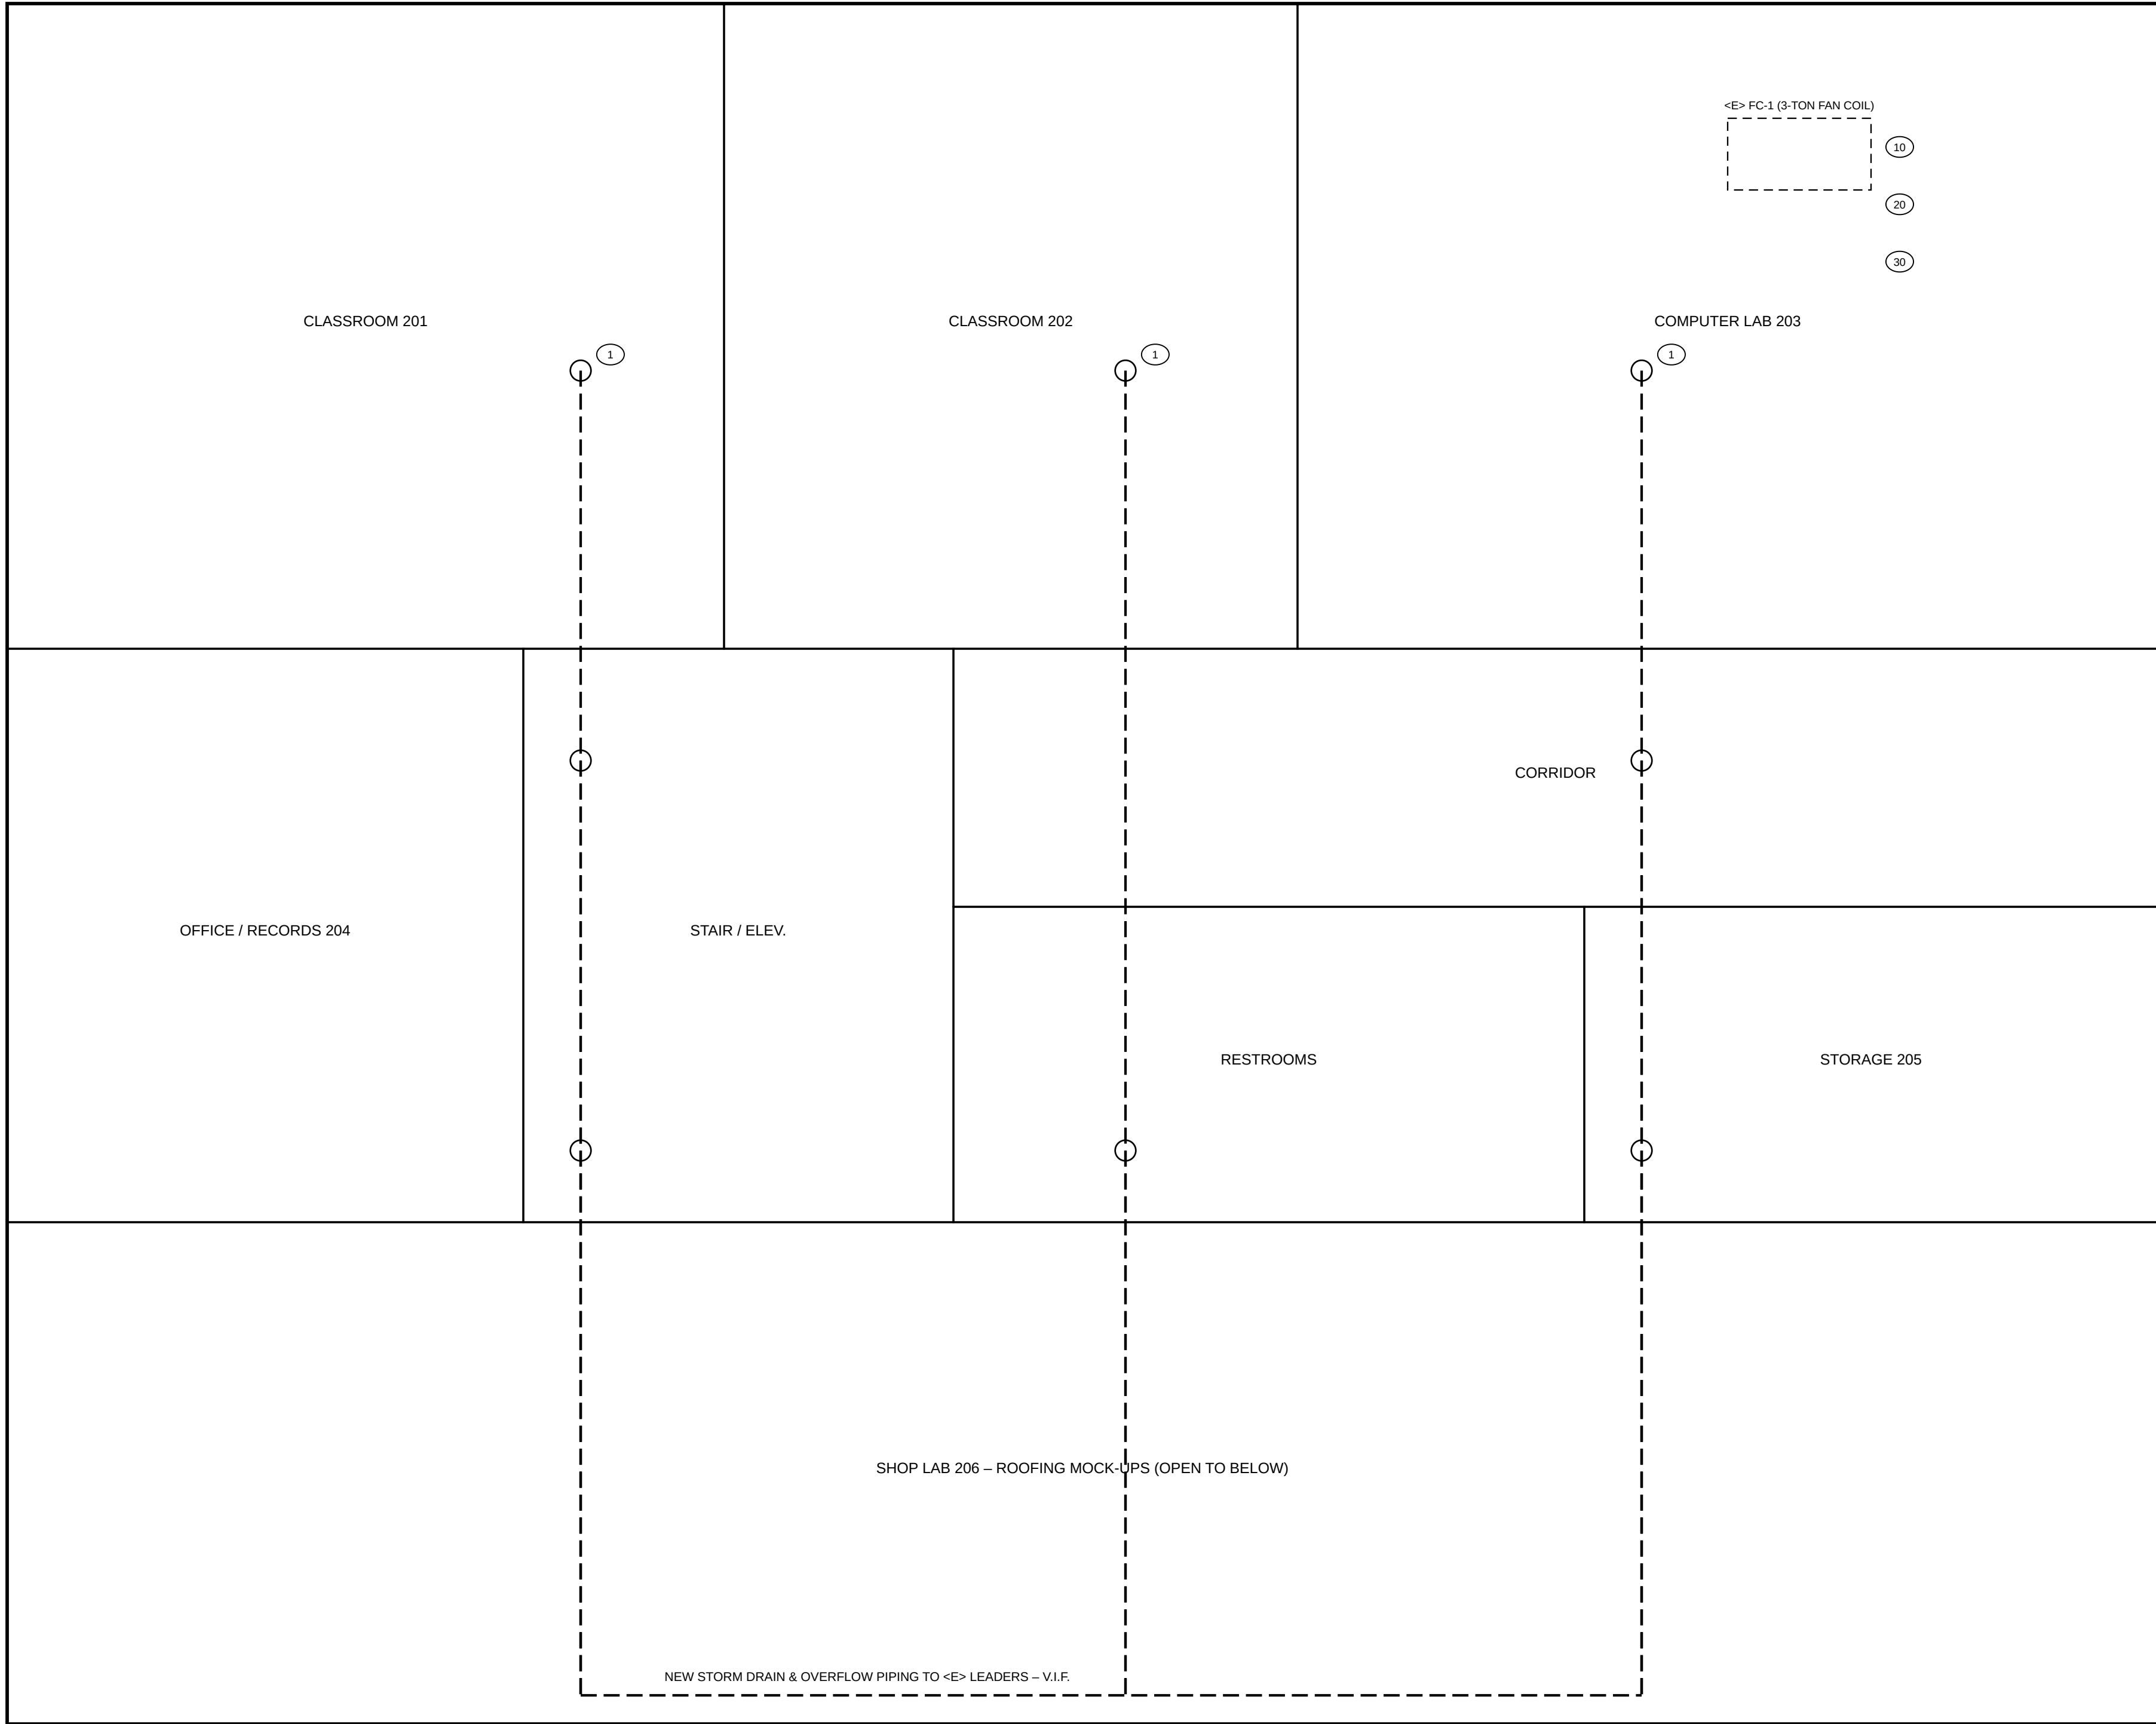

SECOND FLOOR PLAN – NEW MECHANICAL

SCALE: 1/8" = 1'-0"




GENERAL SHEET NOTES

- A. ALL DUCTWORK DIMENSIONS ARE NET INSIDE DIMENSIONS.
B. PROVIDE DUST PROTECTION FOR THE COMPUTER LAB, SHOP LAB AND ALL TRAINING EQUIPMENT WITHIN TEN (10) FEET OF THE WORK.
C. STORM DRAIN AND OVERFLOW PIPING SHALL SLOPE 1/4" PER FOOT MINIMUM.
D. SEE SPECIFICATION SECTION 22 14 00 "FACILITY STORM DRAINAGE" FOR STORM AND ROOF DRAIN PIPING.
E. THE CONTRACTOR SHALL FERROSCAN (ELECTROMAGNETIC SCAN) THE CONCRETE ROOF DECK TO LOCATE AND MISS THE REBAR BEFORE CORING OR DRILLING.
F. VERIFY ALL DIMENSIONS IN THE FIELD BEFORE ORDERING OR FABRICATING PIPING, EQUIPMENT OR FLASHING MATERIALS.

REFERENCE SHEET NOTES

- MECHANICAL NEW:**
1 PROVIDE AND INSTALL NEW STORM DRAIN AND OVERFLOW PIPING PER SPECIFICATION SECTION 22 14 00.
MECHANICAL DEMO:
10 DEMO EXISTING 3-TON FAN COIL FC-1 IN THE COMPUTER LAB. PATCH, PRIME AND PAINT AFFECTED AREAS TO MATCH EXISTING.
CONTROLS DEMO:
20 DEMO EXISTING CONTROLS RELATED TO FAN COIL FC-1.
ELECTRICAL DEMO:
30 REMOVE POWER TO FAN COIL FC-1; PULL CONDUCTORS BACK TO THE SOURCE AND LABEL THE BREAKER "SPARE".

KEY PLAN

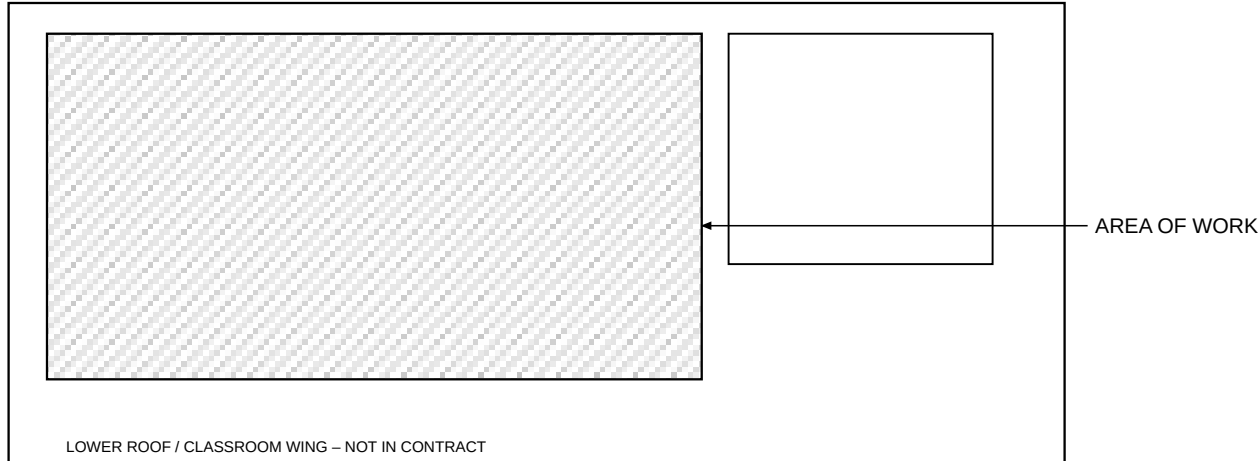

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

VME

VALLEY MEP ENGINEERS
MECHANICAL - ELECTRICAL - PLUMBING
900 N. SAMPLE BLVD. - FRESNO, CA 93700
(559) 555-0177

CONSULTANT STAMP
(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
REVIEW SET		08/03/26	SRC
BID SET		08/24/26	SRC

OWNER:

CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727

SHEET TITLE:

SECOND FLOOR PLAN –
NEW MECHANICAL

JATC PROJECT NO.

JATC-26-07

DATE: 08/24/26

DRAWN BY: SRC

SCALE: 1/8" = 1'-0"


CHECKED: JR

PRACTICE SET

3A – INTRO TO PLANS

SHEET NO.

M101

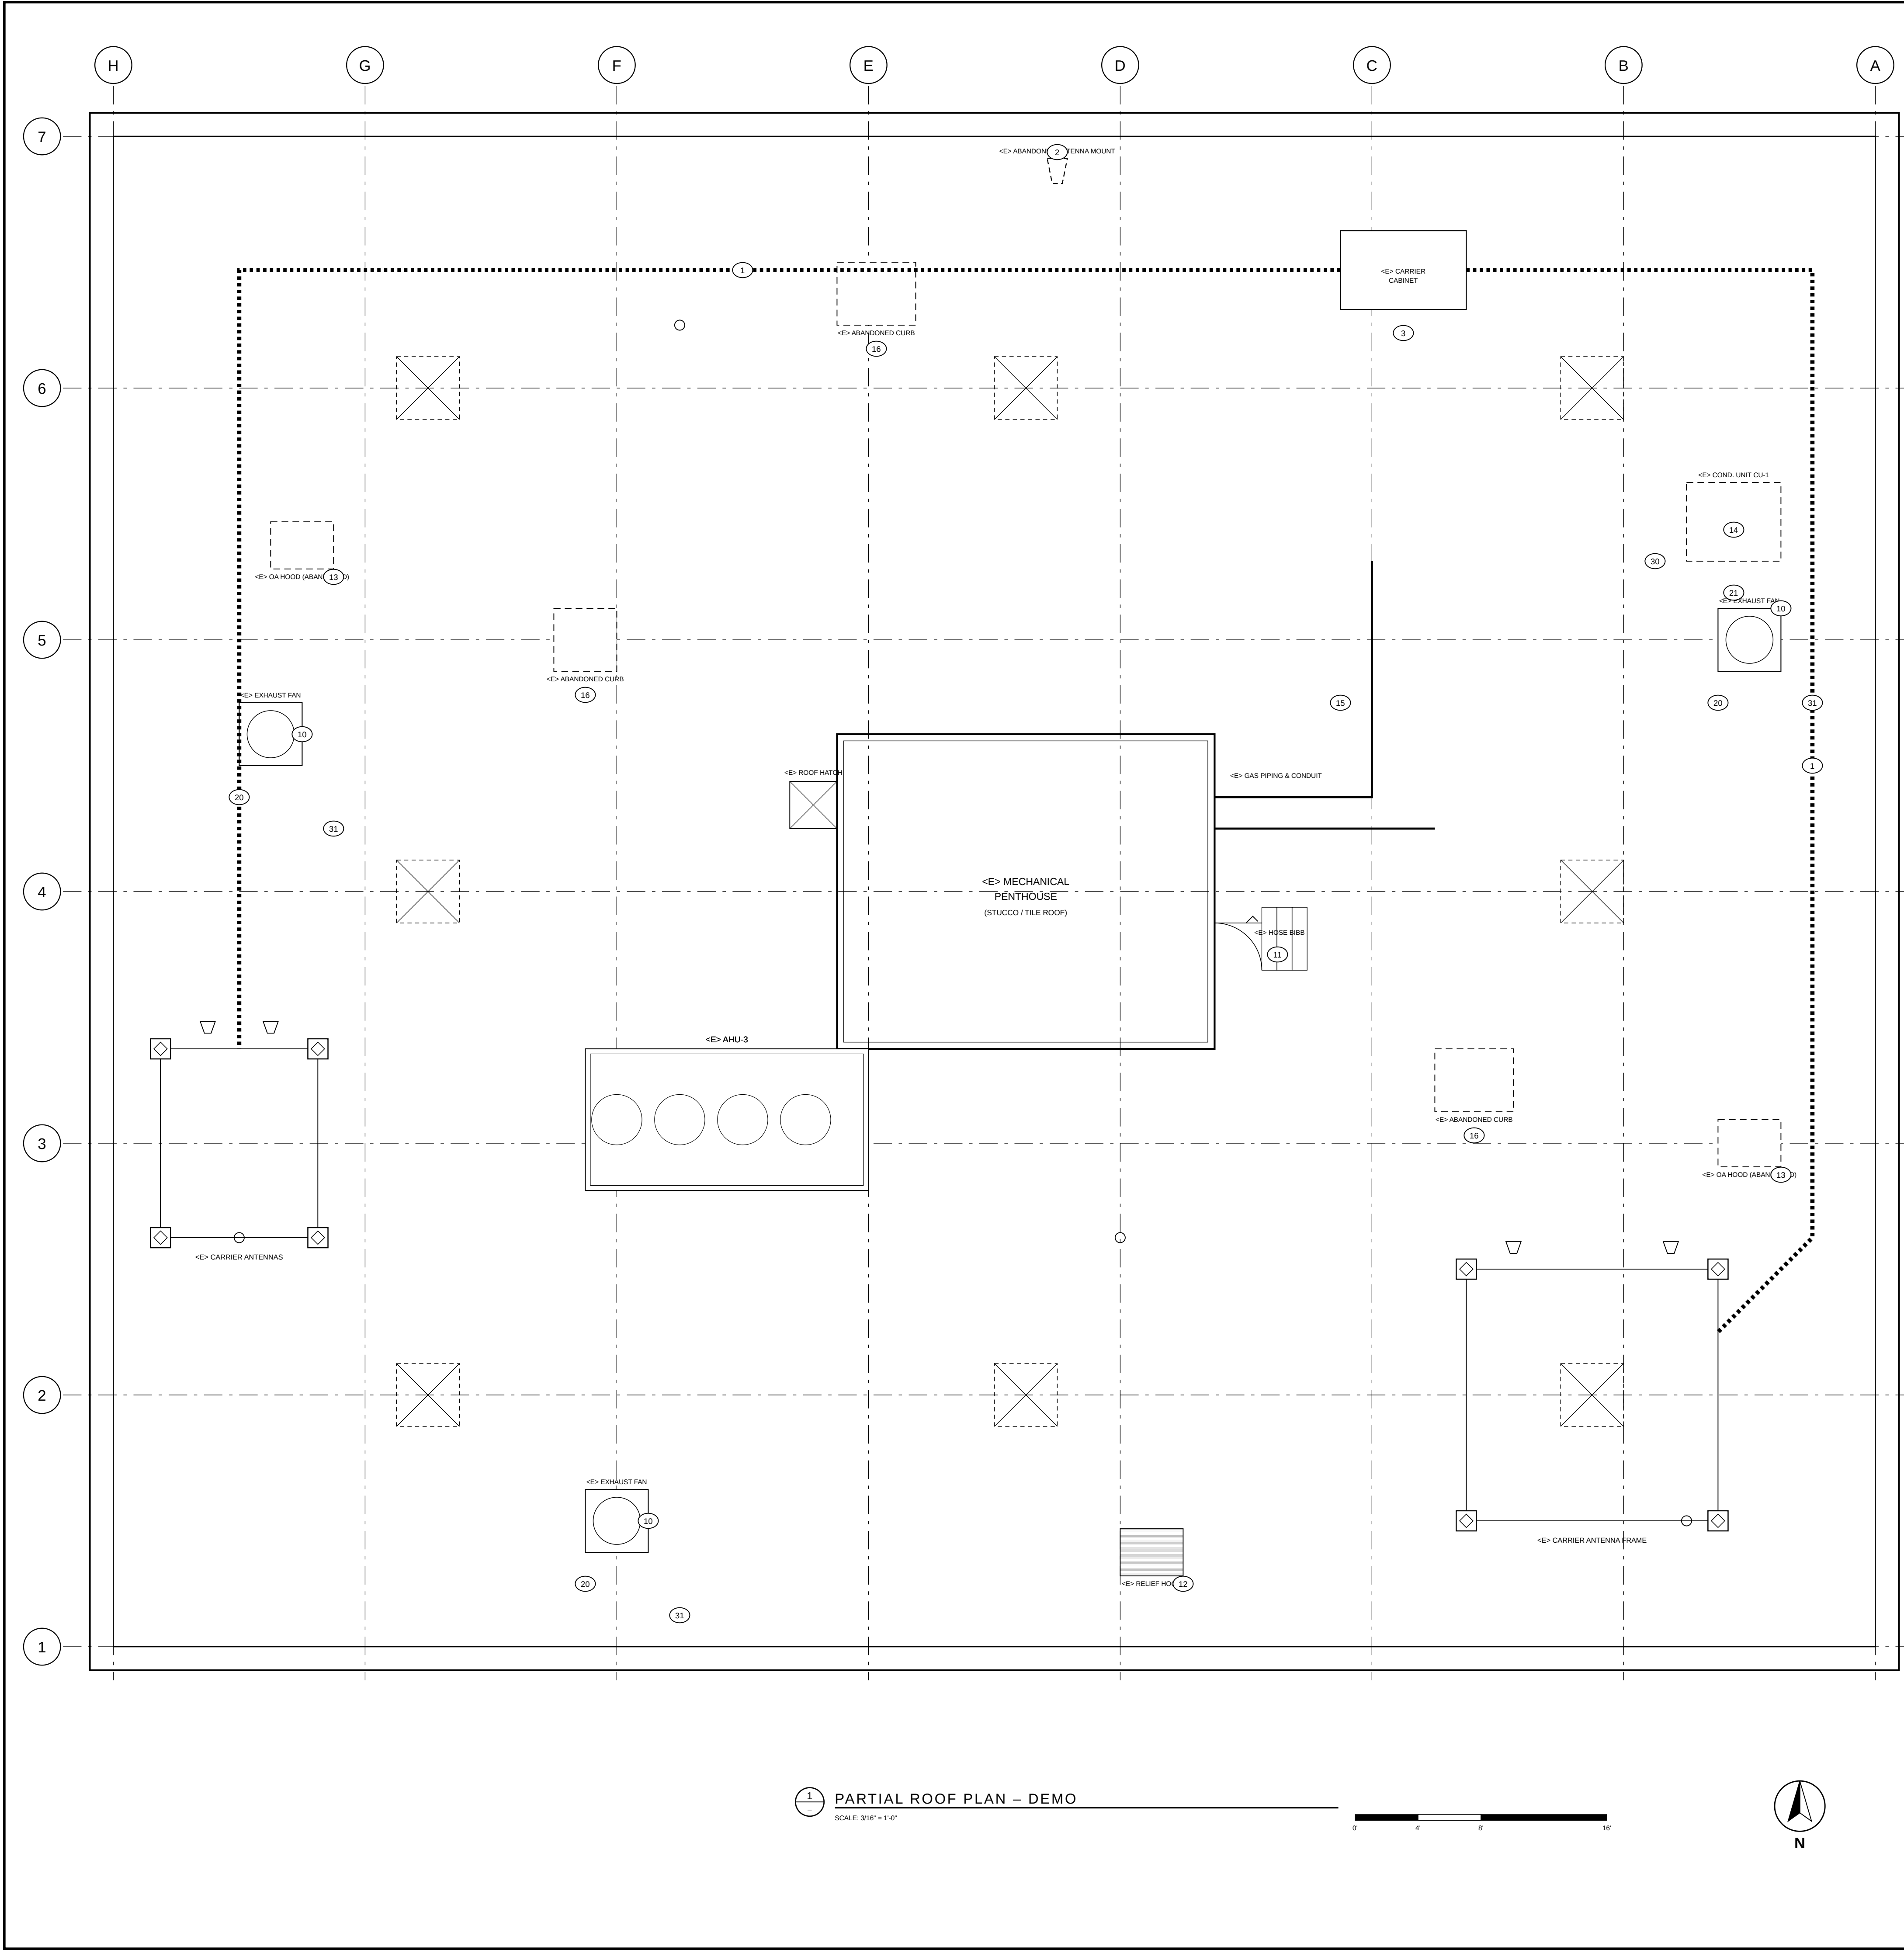

1 PARTIAL ROOF PLAN – DEMO
SCALE: 3/16" = 1'-0"




GENERAL SHEET NOTES

- A. THE ROOF WILL BE REPLACED. COORDINATE WITH THE ROOFING CONTRACTOR TO SUPPORT PIPES AND CONDUITS DURING RE-ROOFING.
- B. ALL WIRES AND CABLES THAT ARE TEMPORARILY EXPOSED SHALL BE SECURED AND PROTECTED DURING CONSTRUCTION.
- C. BEFORE DISCONNECTING, FIELD IDENTIFY AND VERIFY THE PANEL(S) AND CIRCUIT(S) SERVING EQUIPMENT TO BE DEMOLISHED. REUSE EXISTING CIRCUITS U.O.N.
- D. PROVIDE LOCKOUT / TAGOUT ON ALL EQUIPMENT BEFORE DISCONNECTION.
- E. MAINTAIN CONTINUITY TO ANY DOWNSTREAM EQUIPMENT AFFECTED BY DISCONNECTING POWER OR SIGNAL WIRING.

REFERENCE SHEET NOTES

- BY CARRIER (VALLEY WIRELESS CO.):
- 1 DEMO EXISTING CARRIER CABLE TRAY AND SUPPORTS ON THE ROOF.
- 2 DEMO EXISTING ABANDONED ANTENNA MOUNT ON THE NORTH PARAPET.
- 3 DISCONNECT AND TEMPORARILY REMOVE THE CARRIER EQUIPMENT CABINET TO RAISE ITS PLATFORM. DISCONNECT POWER TEMPORARILY AS REQUIRED (PER MOP).
- MECHANICAL:
- 10 DISCONNECT AND TEMPORARILY REMOVE THE EXHAUST FANS. SAVE FOR REINSTALLATION.
- 11 DISCONNECT AND REMOVE THE HOSE BIBB. SAVE FOR REINSTALLATION.
- 12 DEMO EXISTING RELIEF HOOD.
- 13 DEMOLISH EXISTING ABANDONED OA HOODS. PATCH THE OPENINGS PER DETAIL 7M502.
- 14 DEMOLISH EXISTING CONDENSING UNIT CU-1 (AND FAN COIL FC-1 ON THE 2ND FLOOR, SEE M101). RECLAIM AND DISPOSE OF REFRIGERANT PER EPA SECTION 608.
- 15 EXISTING GAS PIPING AND CONDUIT SHOWN NEED TO BE RAISED 18" ABOVE THE NEW ROOF. CONTRACTOR TO FIELD VERIFY SIZES.
- 16 DEMO EXISTING ABANDONED CURBS AND PATCH THE OPENINGS PER DETAIL 7M502. COORDINATE WITH THE ROOFING CONTRACTOR.
- CONTROLS:
- 20 DISCONNECT AND TEMPORARILY REMOVE CONTROLS FROM EXISTING EXHAUST FANS.
- 21 DEMO CONTROLS FOR CONDENSING UNIT CU-1.
- ELECTRICAL:
- 20 DISCONNECT AND REMOVE CONDUIT AND WIRE BACK TO THE SOURCE PANEL. LABEL THE BREAKER AS A SPARE.
- 21 DISCONNECT AND SAFE OFF POWER TO EXISTING EXHAUST FANS.

KEY PLAN

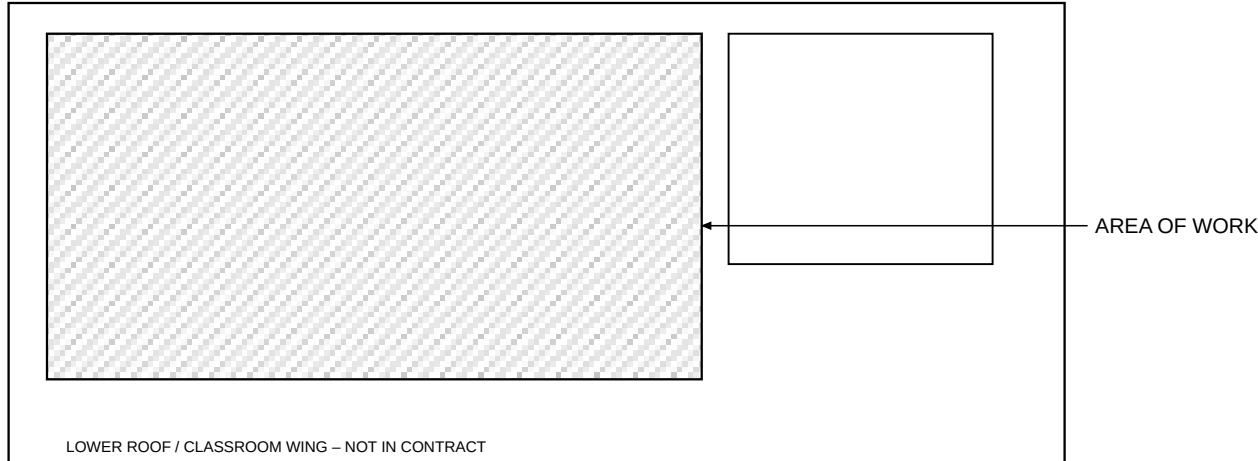

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

VME
VALLEY MEP ENGINEERS
MECHANICAL - ELECTRICAL - PLUMBING
900 N. SAMPLE BLVD. - FRESNO, CA 93700
(559) 555-0177

CONSULTANT STAMP
(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
REVIEW SET		08/03/26	SRC
BID SET		08/24/26	SRC

OWNER:

CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727

SHEET TITLE:

PARTIAL ROOF PLAN –
DEMO MECHANICAL

JATC PROJECT NO.

JATC-26-07

PRACTICE SET

3A – INTRO TO PLANS

DATE: 08/24/26


DRAWN BY: SRC

SCALE: 3/16" = 1'-0"


CHECKED: JR

SHEET NO.

M102D

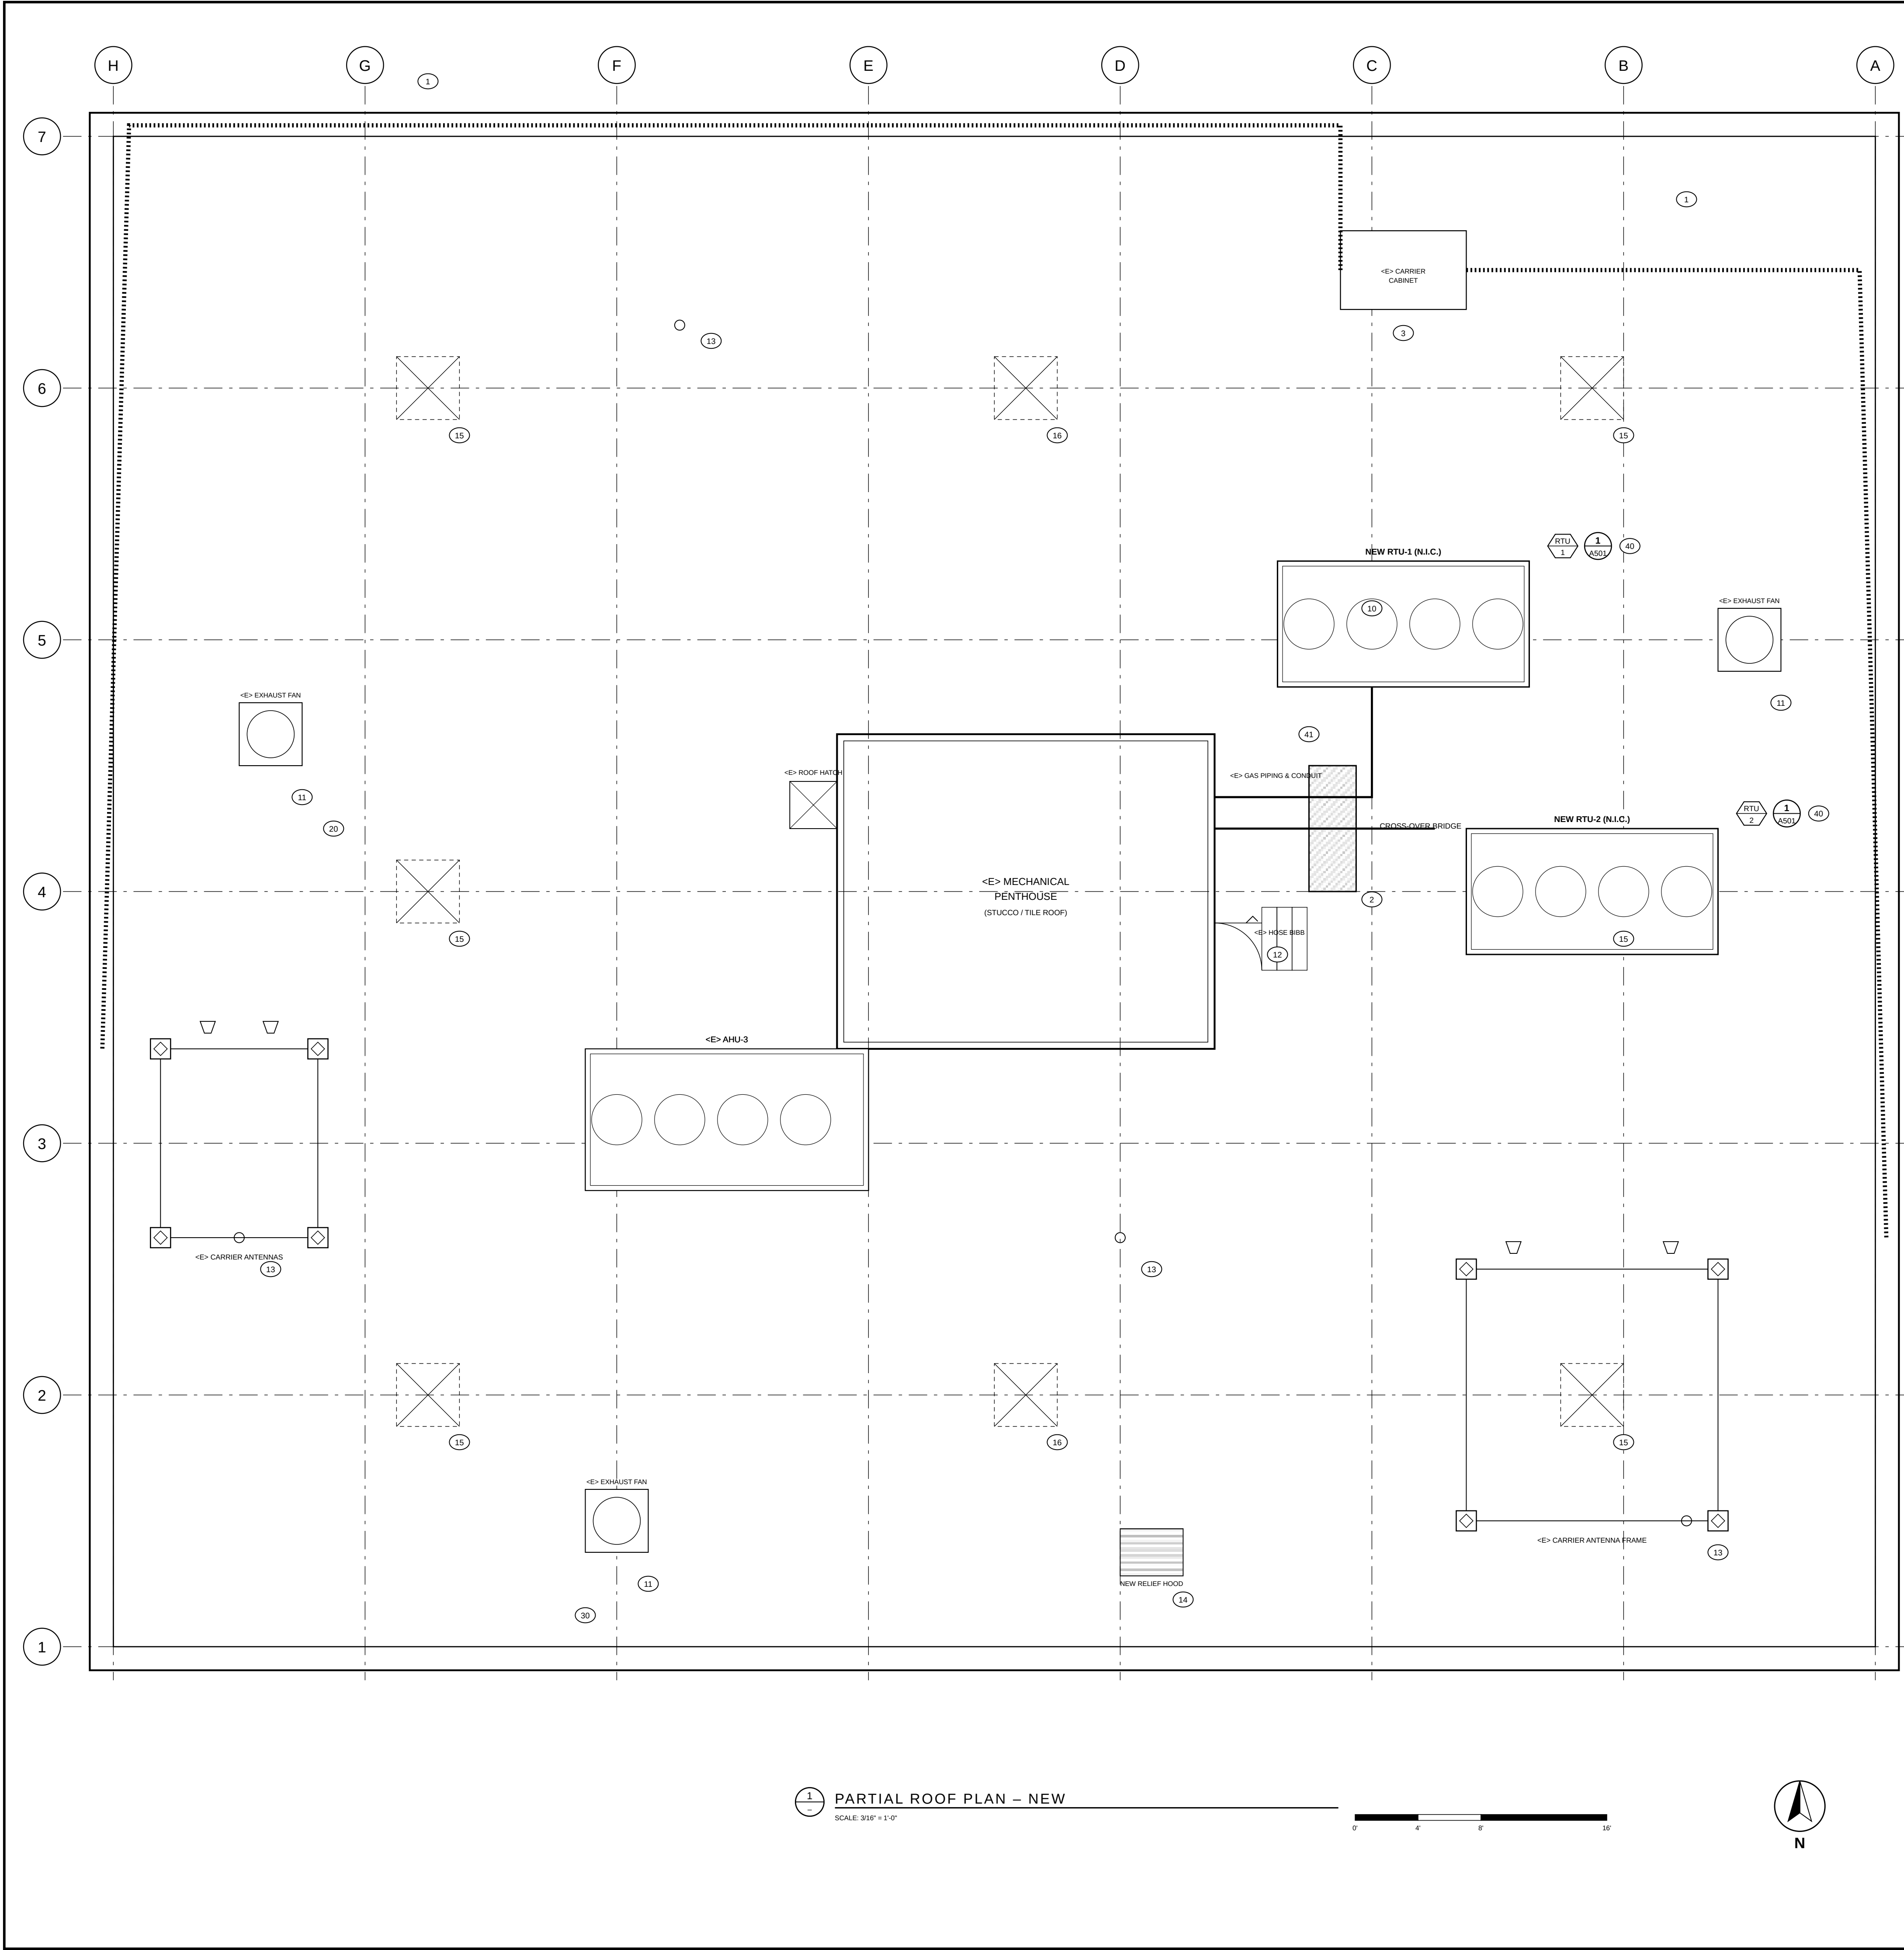

1 PARTIAL ROOF PLAN – NEW
SCALE: 3/16" = 1'-0"




GENERAL SHEET NOTES

- A. ALL DUCTWORK OUTSIDE THE BUILDING SHALL BE DOUBLE-WALL WITH 2" INSULATION, TOP OF DUCT SHALL HAVE A PITCHED ROOF.
B. PROVIDE DUST PROTECTION FOR TRAINING EQUIPMENT WITHIN TEN (10) FEET OF THE WORK.
C. ALL STEEL COMPONENTS OUTSIDE SHALL BE HOT-DIPPED GALVANIZED OR STAINLESS STEEL U.O.N.
D. ALL PIPES, CONDUITS AND SUPPORTS SHALL BE 18" ABOVE THE ROOF U.O.N.
E. STORM DRAIN AND OVERFLOW PIPING SHALL SLOPE 1/4" PER FOOT MIN.
F. EXTEND ALL VENTS SO THE NEW VENT HEIGHT IS 10' MIN. ABOVE THE ROOF, COVER THE TOP WITH 1/4" WIRE MESH.
G. SEE SPECIFICATION SECTION 22 14 00 FOR STORM AND ROOF DRAIN PIPING.
H. THE CONTRACTOR SHALL FERROSCAN THE ROOF DECK TO MISS THE REBAR PRIOR TO CORING.
I. V.I.F. ALL DIMENSIONS BEFORE ORDERING OR FABRICATING DUCT, EQUIPMENT OR FLASHING MATERIALS.

REFERENCE SHEET NOTES

- BY CARRIER (VALLEY WIRELESS CO.):
1 INSTALL NEW CARRIER CABLE TRAY AND SUPPORTS ON THE PARAPET.
2 INSTALL CROSS-OVER BRIDGE PER DETAIL 1M502. MAKE SURE THE BRIDGE DOES NOT LAND ON AN EXISTING ROOF DRAIN.
3 REINSTALL THE CARRIER EQUIPMENT CABINET AFTER RAISING THE PLATFORM. RECONNECT POWER.
- BASE BID - MECHANICAL:
40 RAISE EXISTING PIPING AS SHOWN, PROVIDE SUPPORTS PER 10M501. SEE 5/A501 FOR FLASHING.
41 REINSTALL THE EXHAUST FANS WITH TALLER CURBS, SEE 4M501.
42 EXTEND THE EXISTING HOSE BIBB SO IT IS 10' MIN. ABOVE THE ROOF, SEE 5M501 FOR SUPPORT.
43 EXTEND ALL VENTS SO THE NEW VENT HEIGHT IS 10' MIN. ABOVE THE ROOF, SEE 5/A501 FOR FLASHING.
44 INSTALL NEW RELIEF HOOD PER DETAIL 6M501.
45 PROVIDE & INSTALL NEW ROOF DRAIN. CORE THE DECK AS REQUIRED (SCAN FIRST). SEE 1M501.
46 PROVIDE & INSTALL NEW OVERFLOW DRAIN. CORE AS REQUIRED. SEE 6M501.
- CONTROLS / ELECTRICAL:
20 RECONNECT ALL CONTROLS FOR EXISTING EXHAUST FANS.
30 RECONNECT EXISTING EXHAUST FANS.
- N.I.C.:
40 INSTALLATION OF THE NEW ROOFTOP UNITS RTU-1 AND RTU-2 AND THEIR SUPPORTS IS PART OF THE HVAC REPLACEMENT WORK.
41 RAISING THE EXISTING GAS PIPING AND CONDUIT EAST OF THE PENTHOUSE IS PART OF THE HVAC REPLACEMENT PROJECT, WHICH ALSO INCLUDES THE CROSS-OVER BRIDGE AFTER RAISING.

KEY PLAN

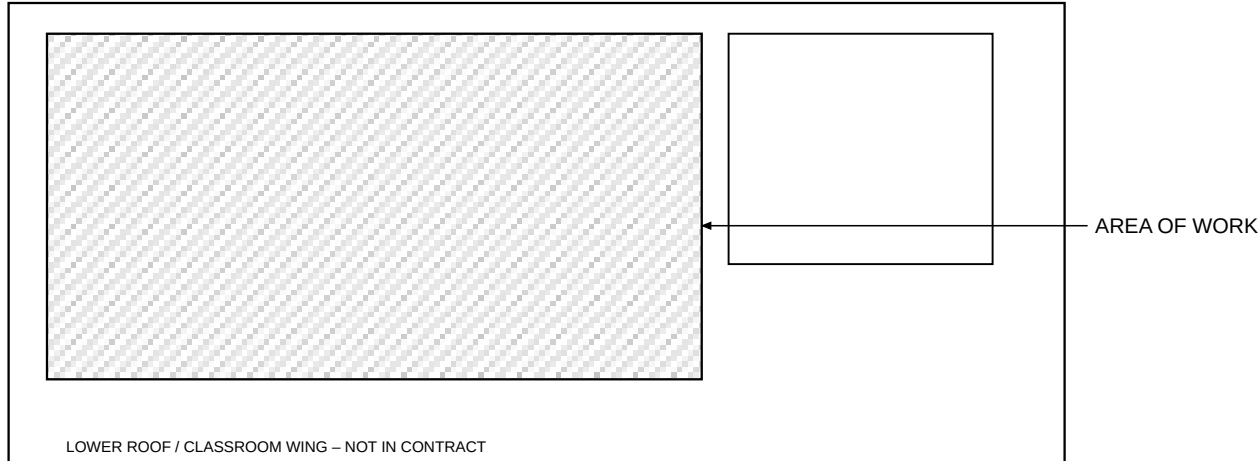

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION
FOR APPRENTICE BLUEPRINT READING ONLY

VME
VALLEY MEP ENGINEERS
MECHANICAL - ELECTRICAL - PLUMBING
900 N. SAMPLE BLVD. - FRESNO, CA 93700
(559) 555-0177

CONSULTANT STAMP
(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
1	REVIEW SET	08/03/26	SRC
2	BID SET	08/24/26	SRC









OWNER:
CENTRAL VALLEY
ROOFERS & WATERPROOFERS
JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:
TRAINING CENTER
ROOF REPLACEMENT
5537 E. LAMONA AVE. #1
FRESNO, CA 93727

SHEET TITLE:
PARTIAL ROOF PLAN –
NEW MECHANICAL

JATC PROJECT NO. **JATC-26-07** DATE: 08/24/26 DRAWN BY: SRC CHECKED: JR SCALE: 3/16" = 1'-0"

PRACTICE SET 3A – INTRO TO PLANS SHEET NO. **M102**

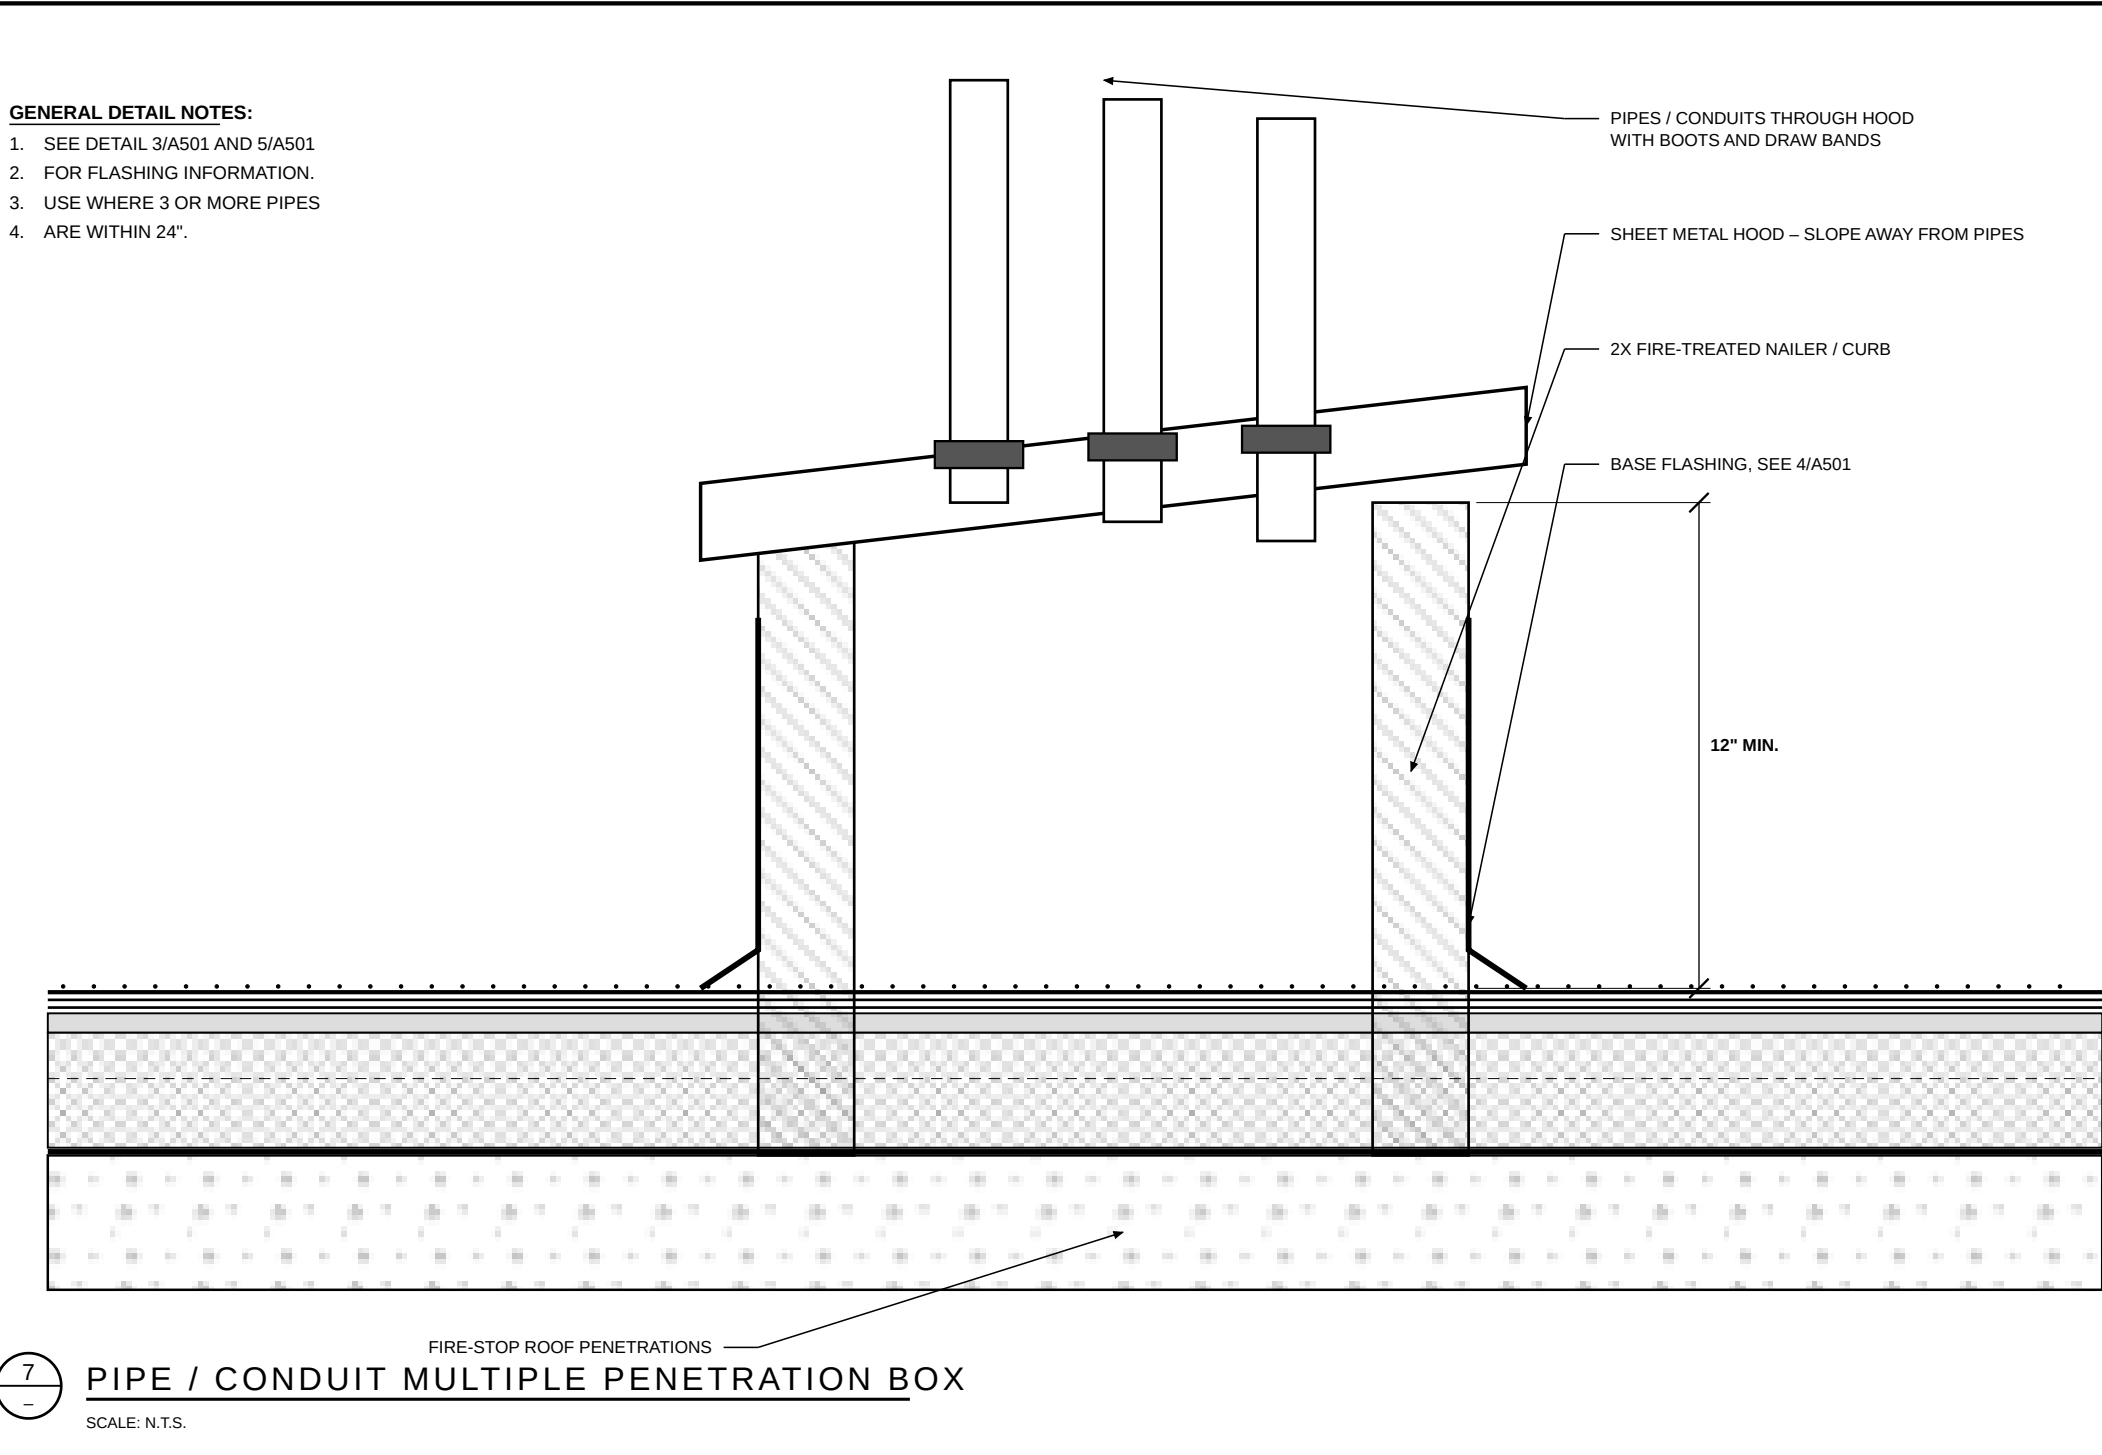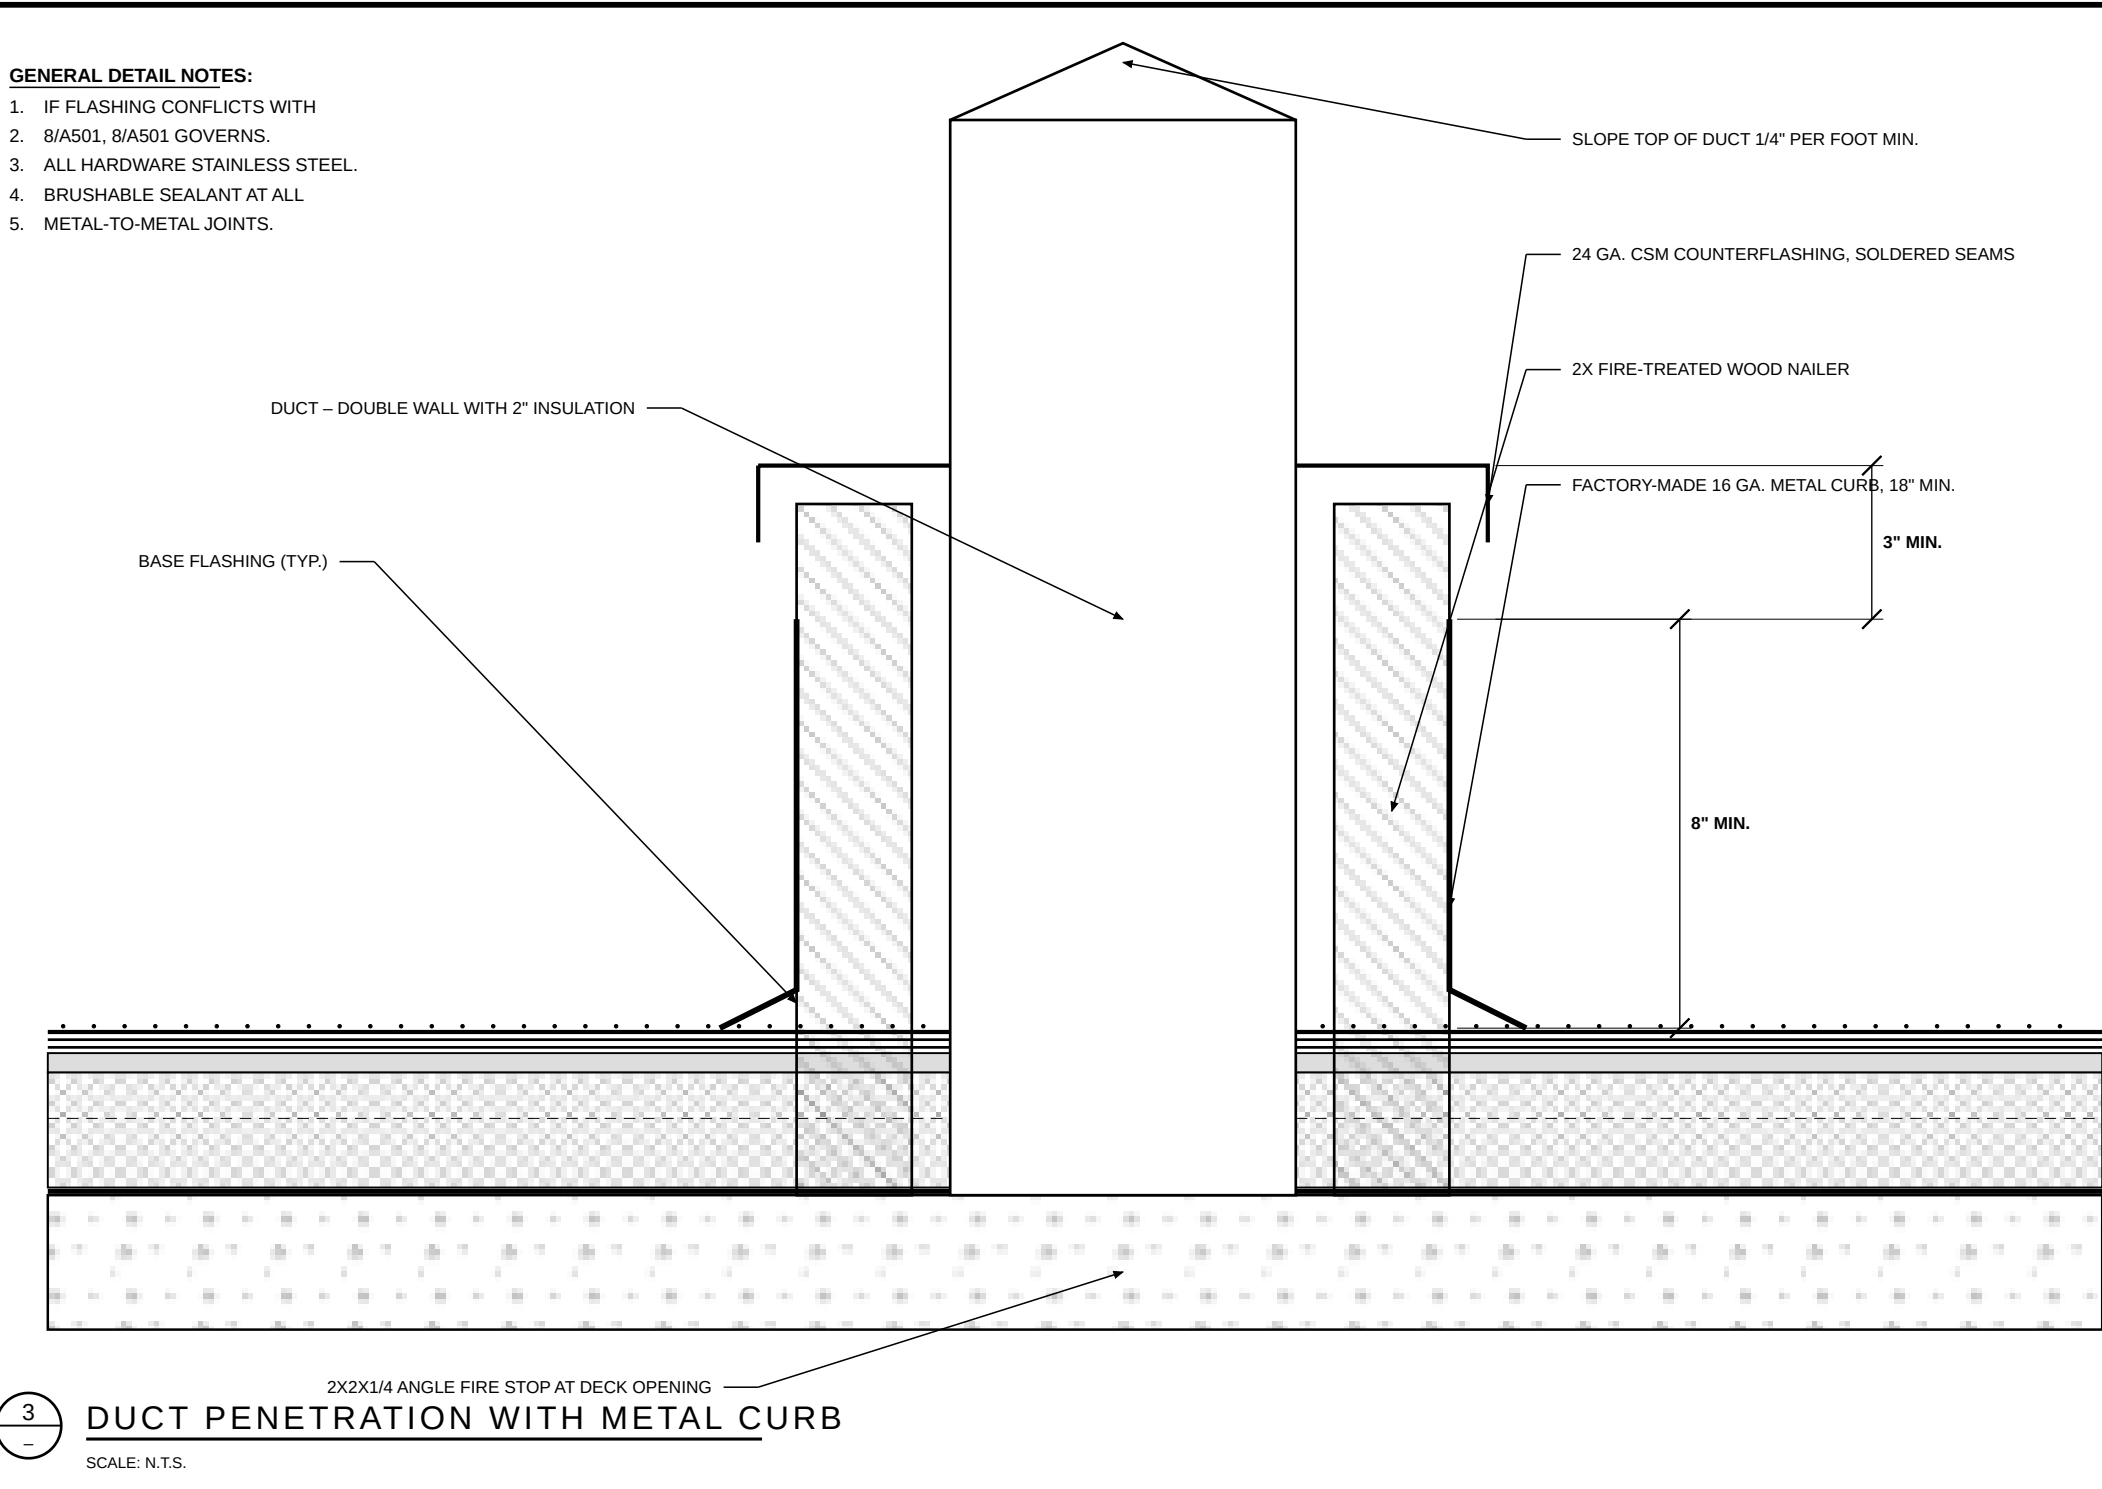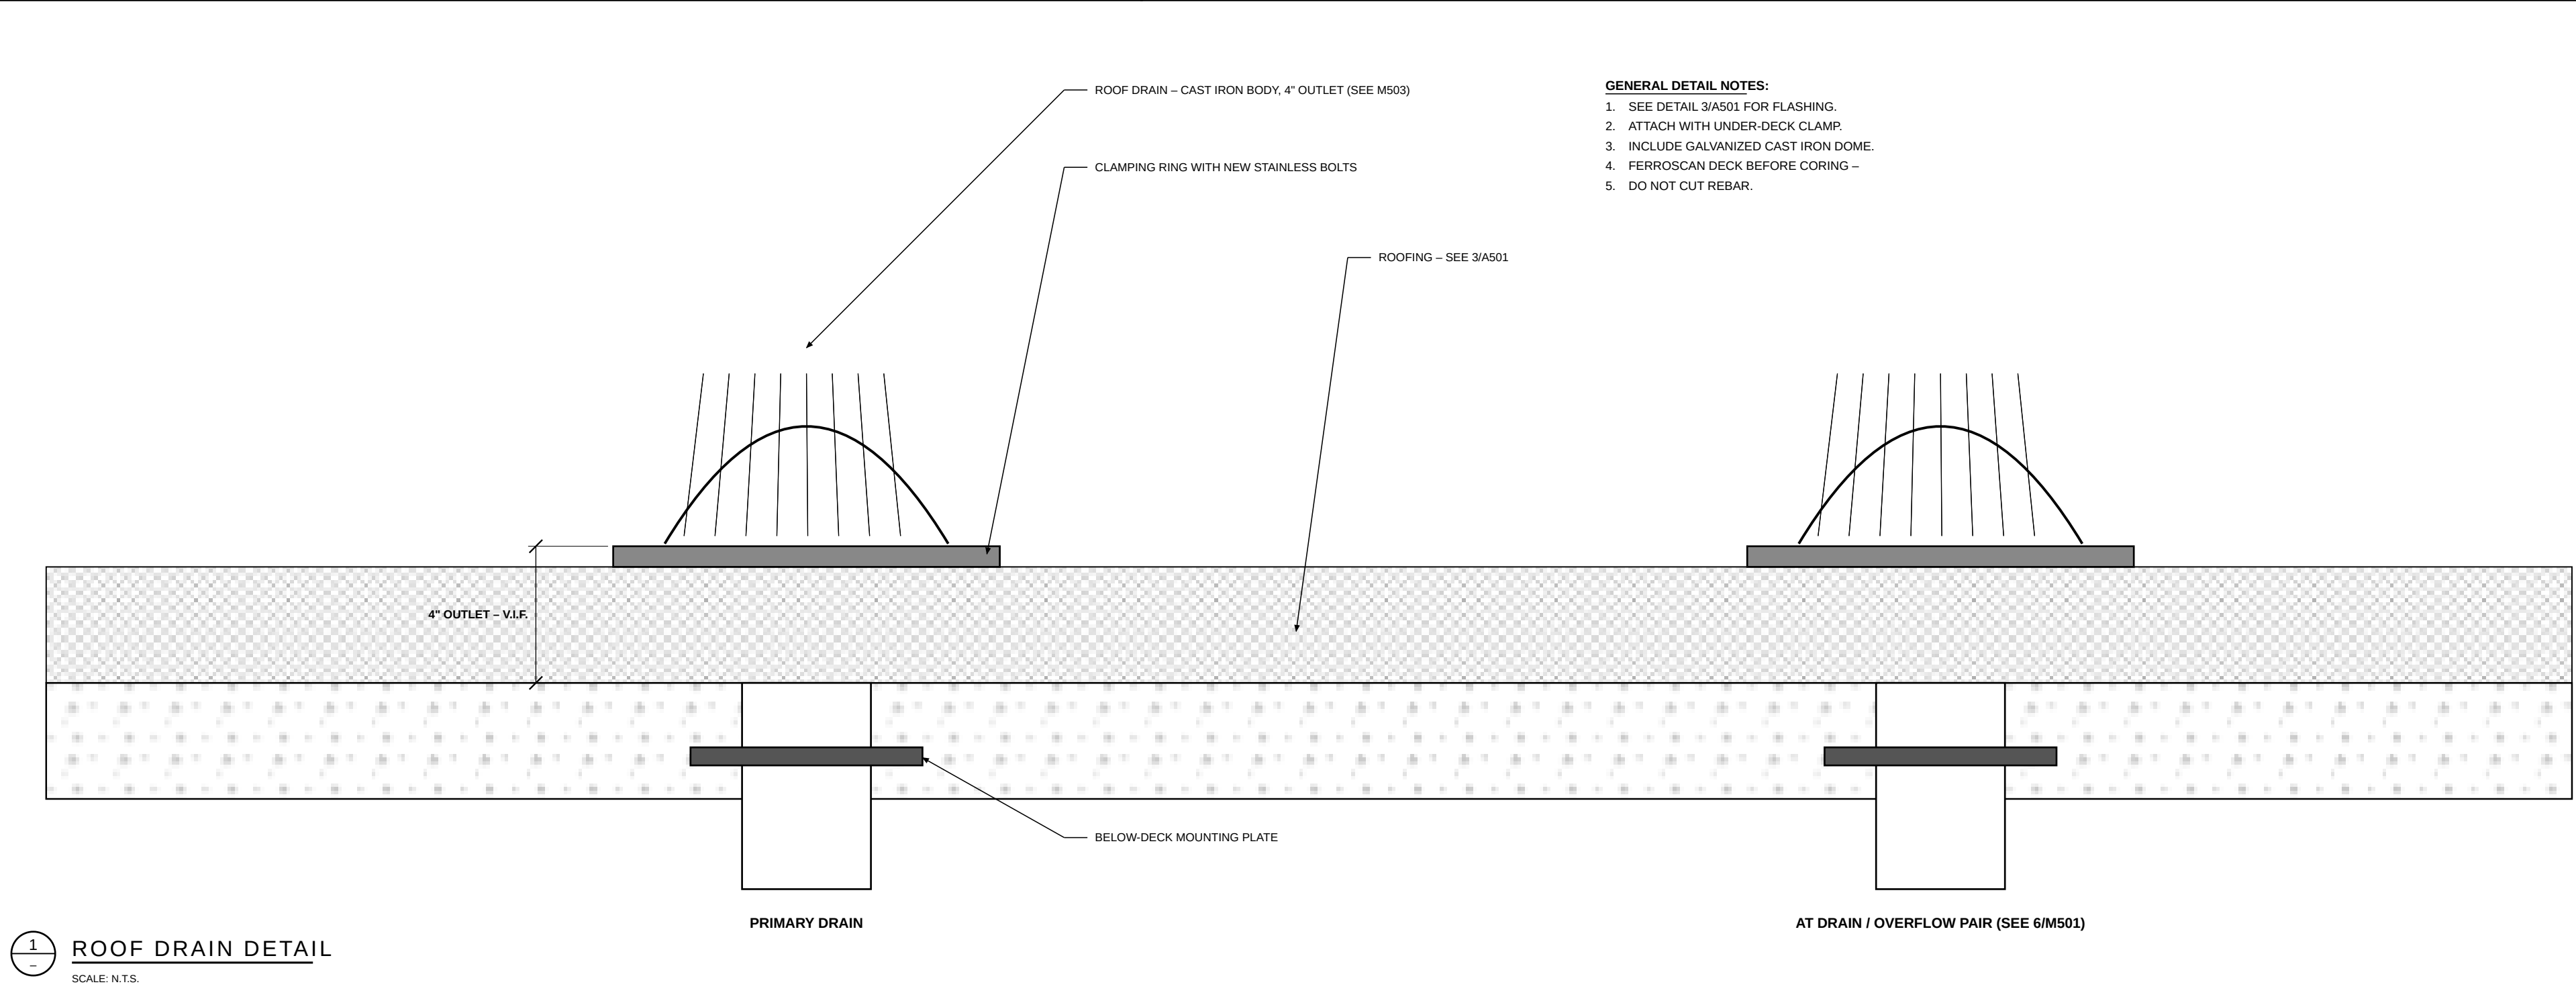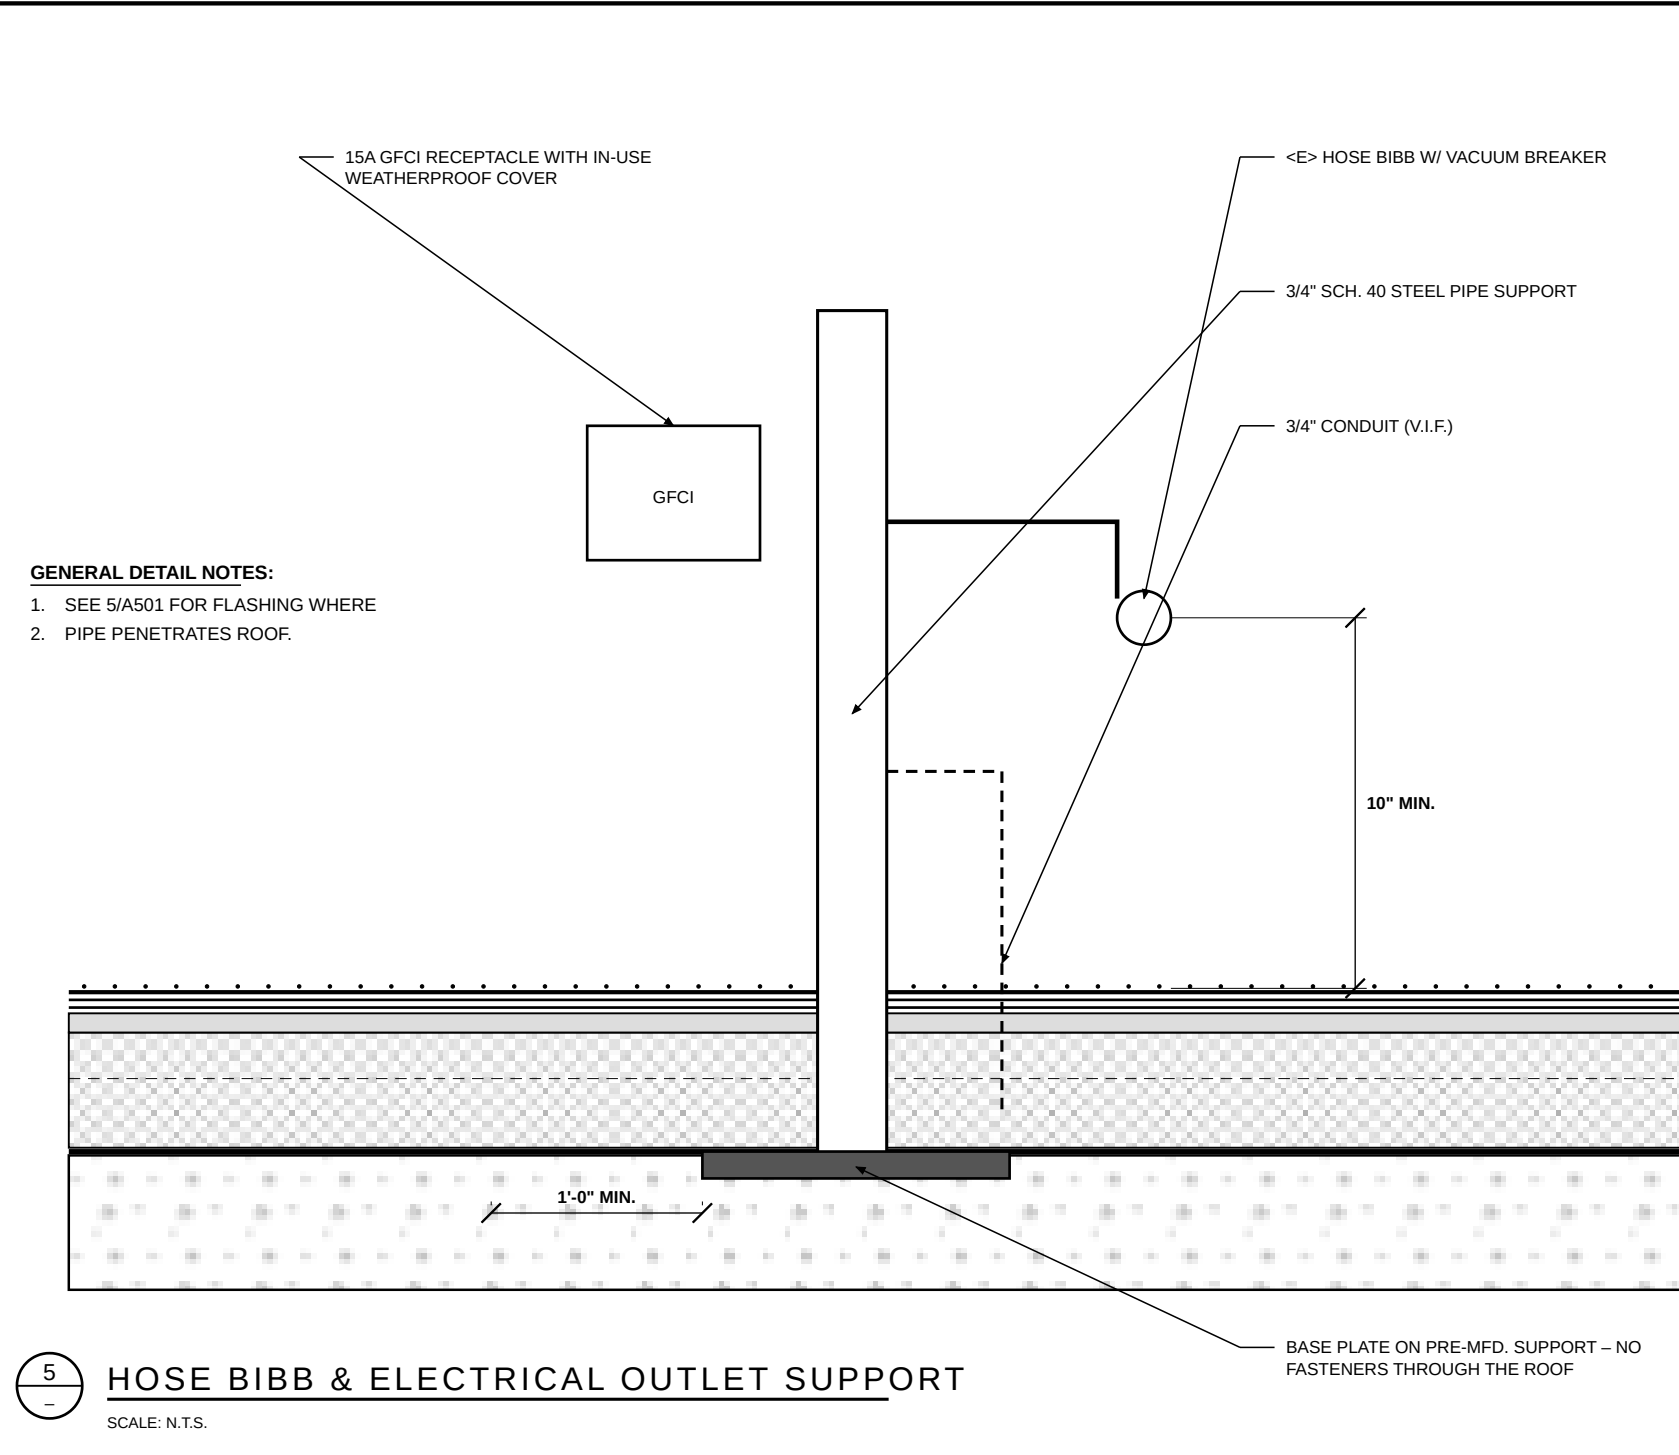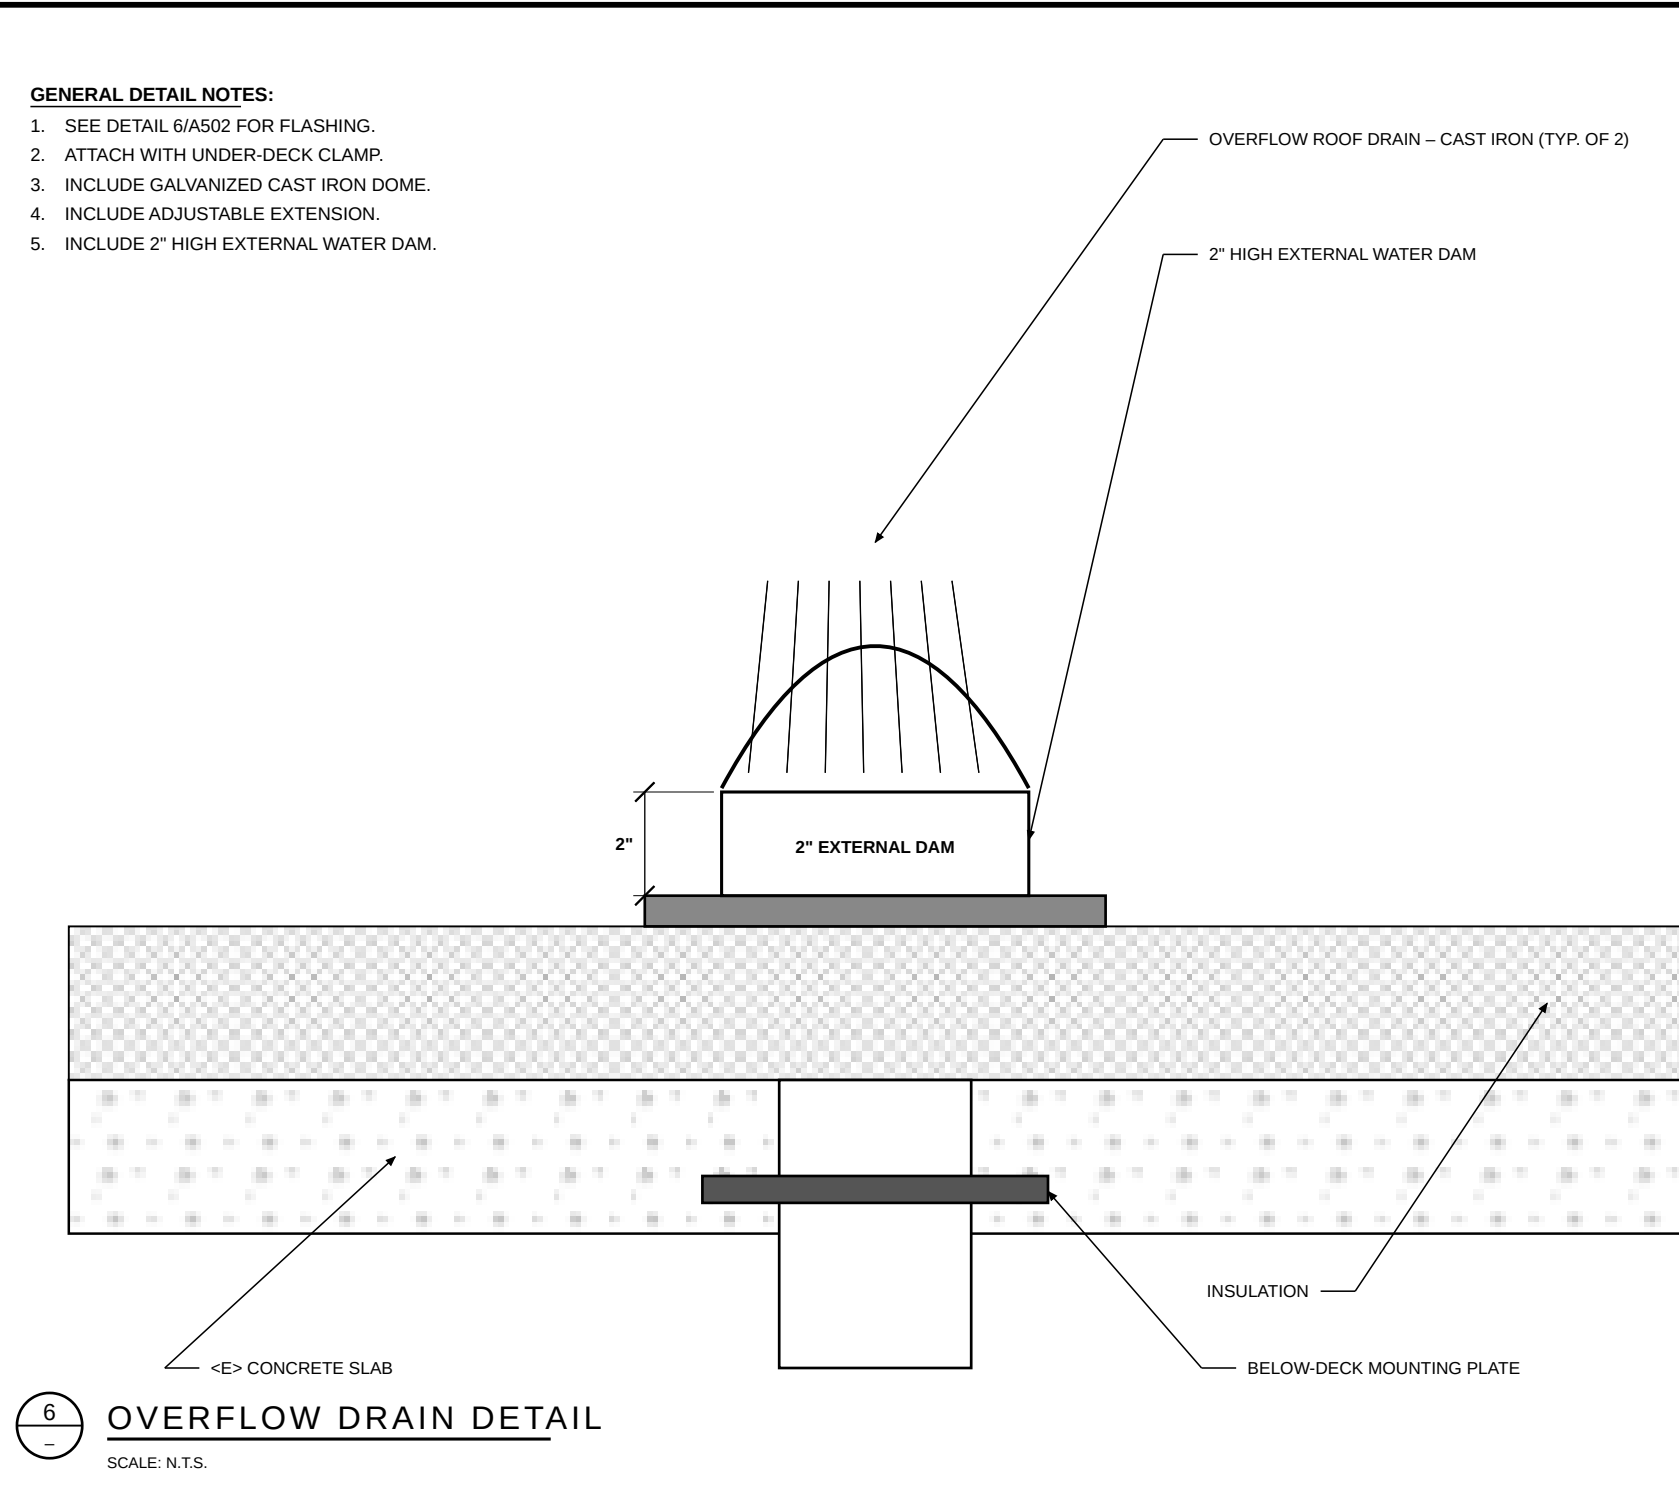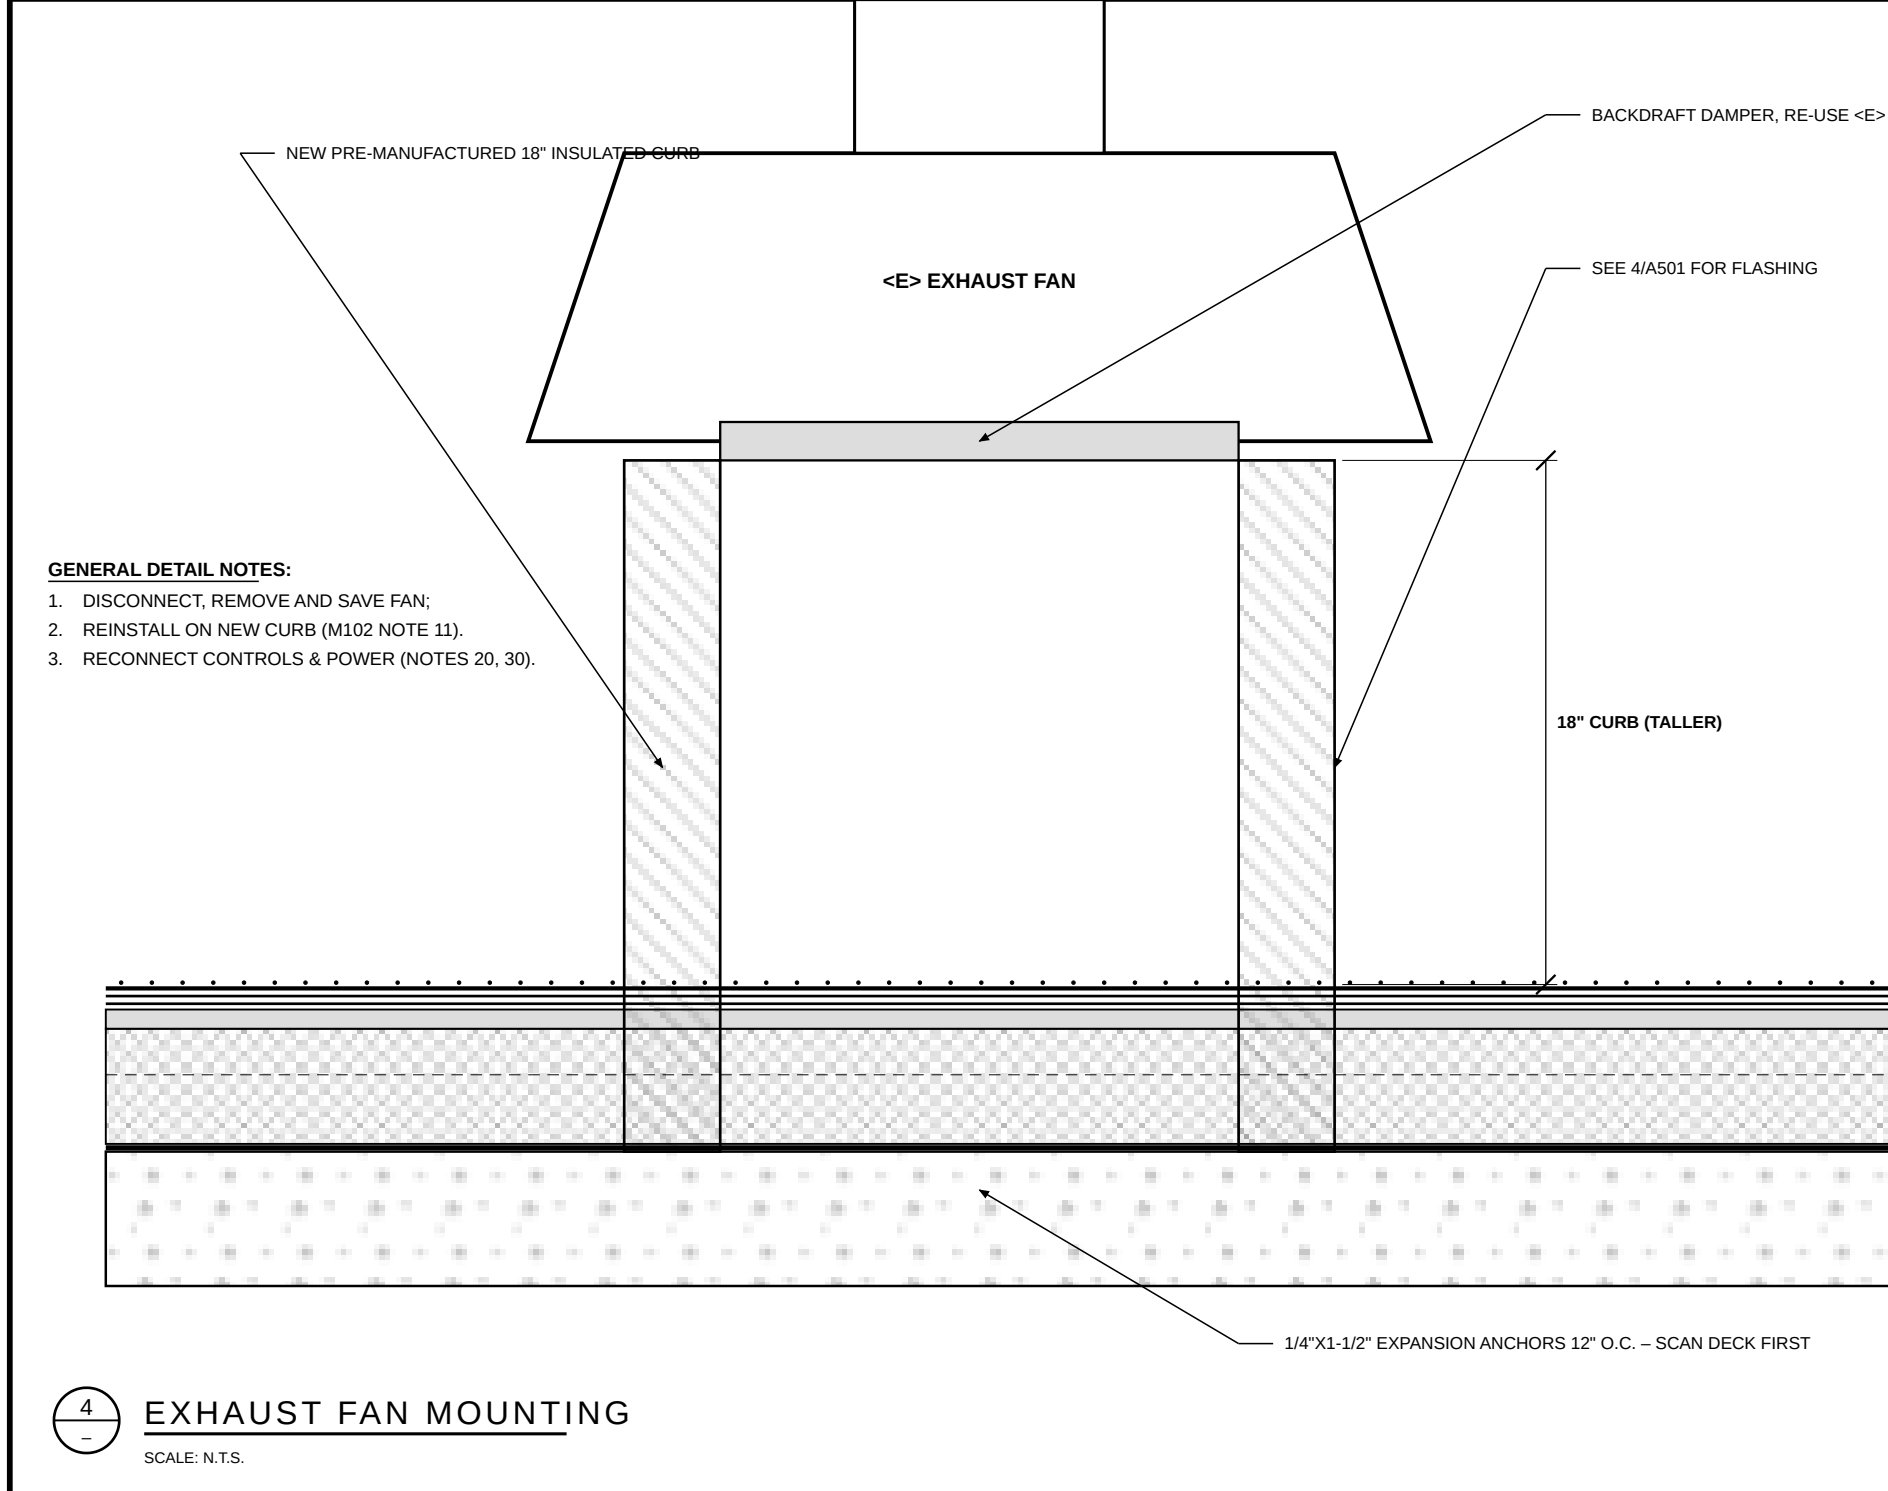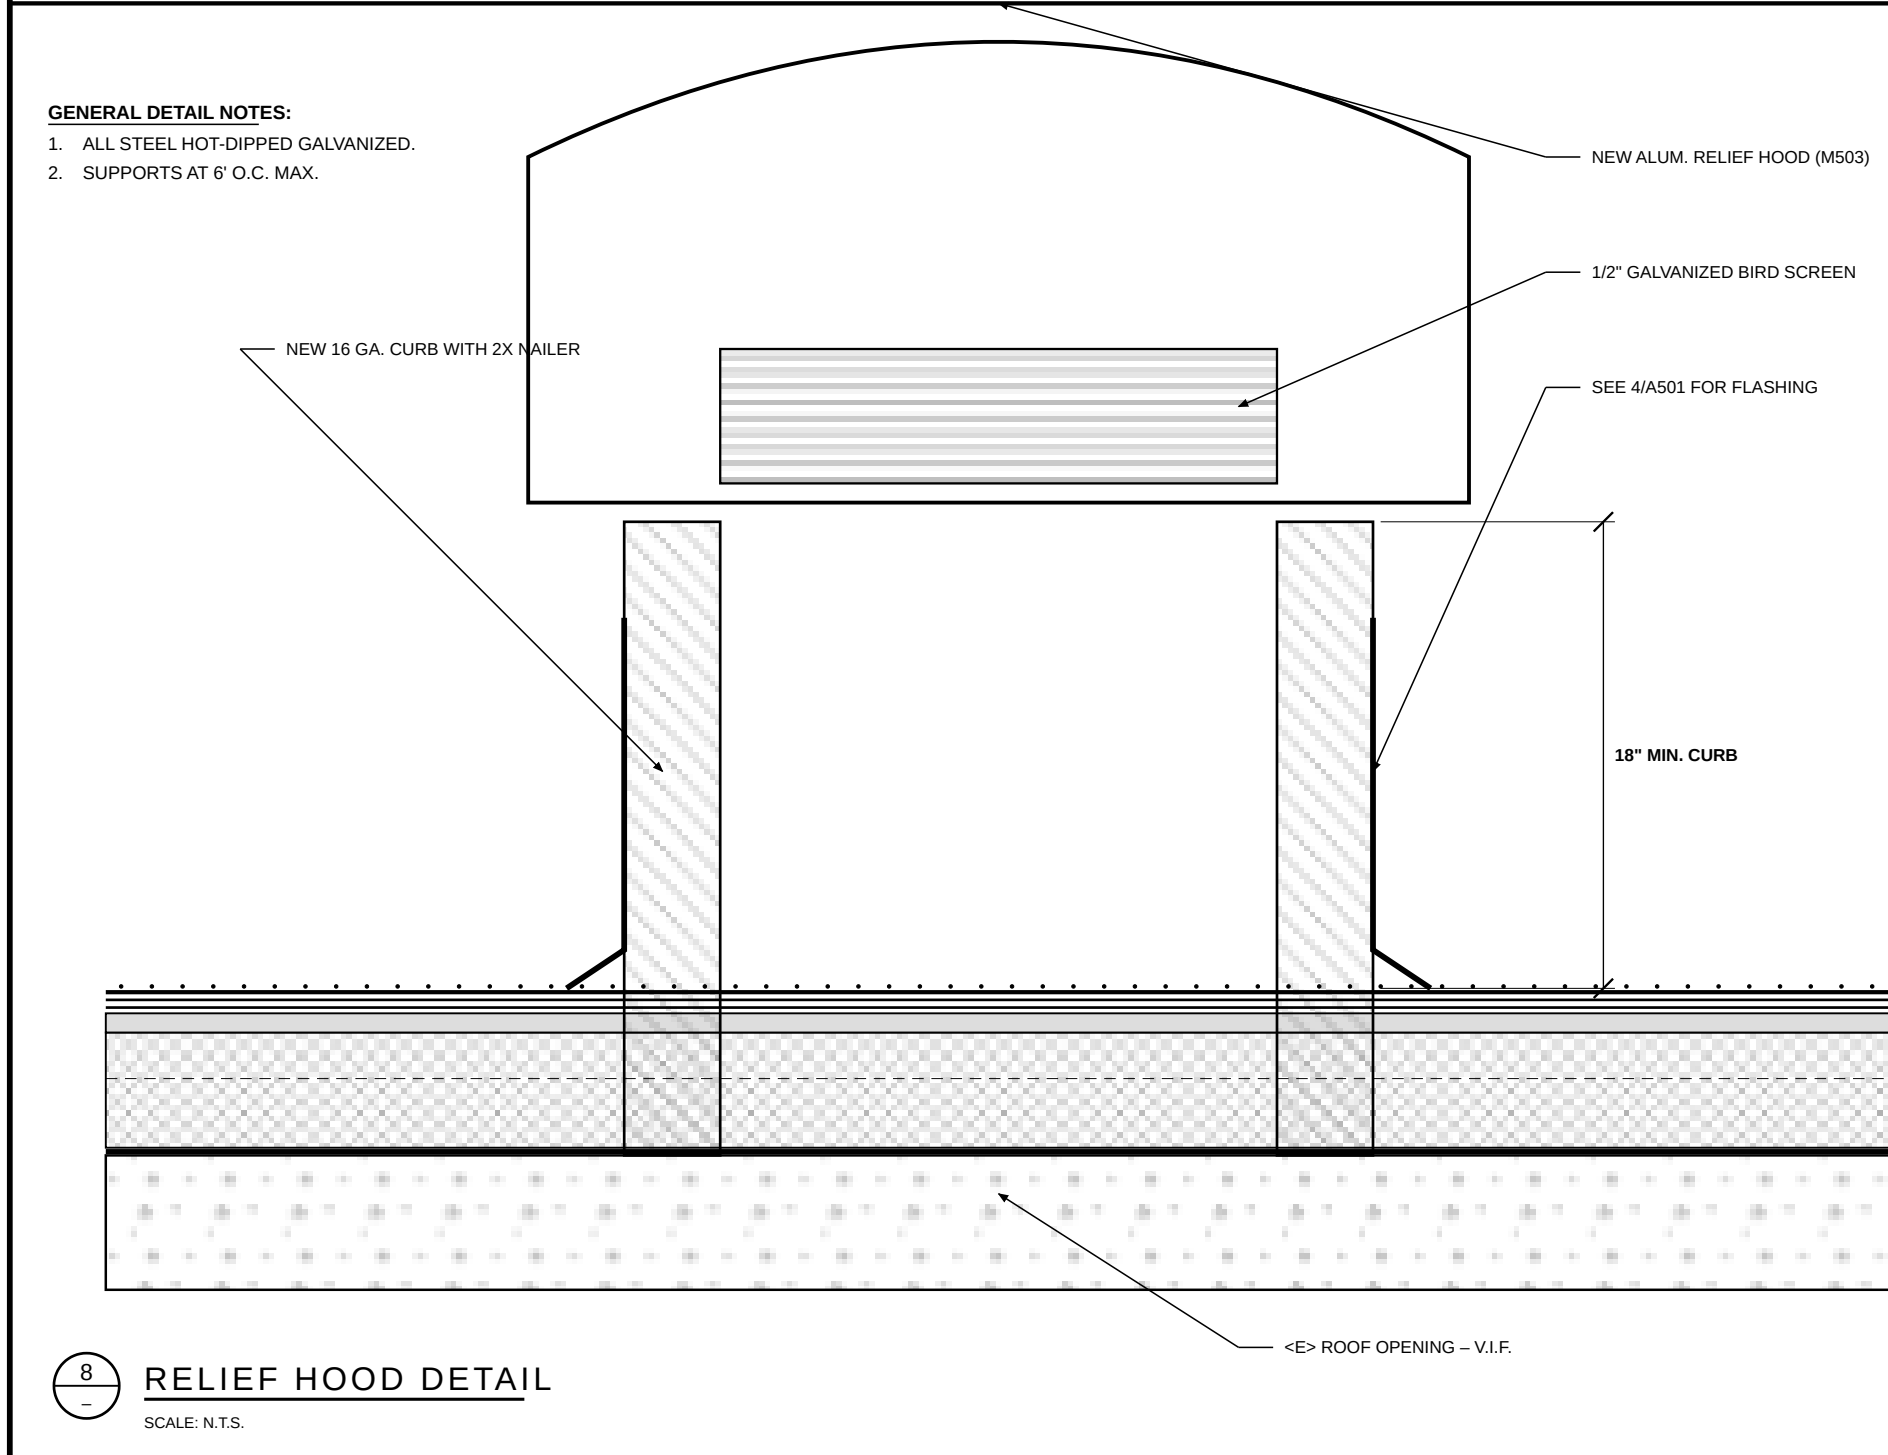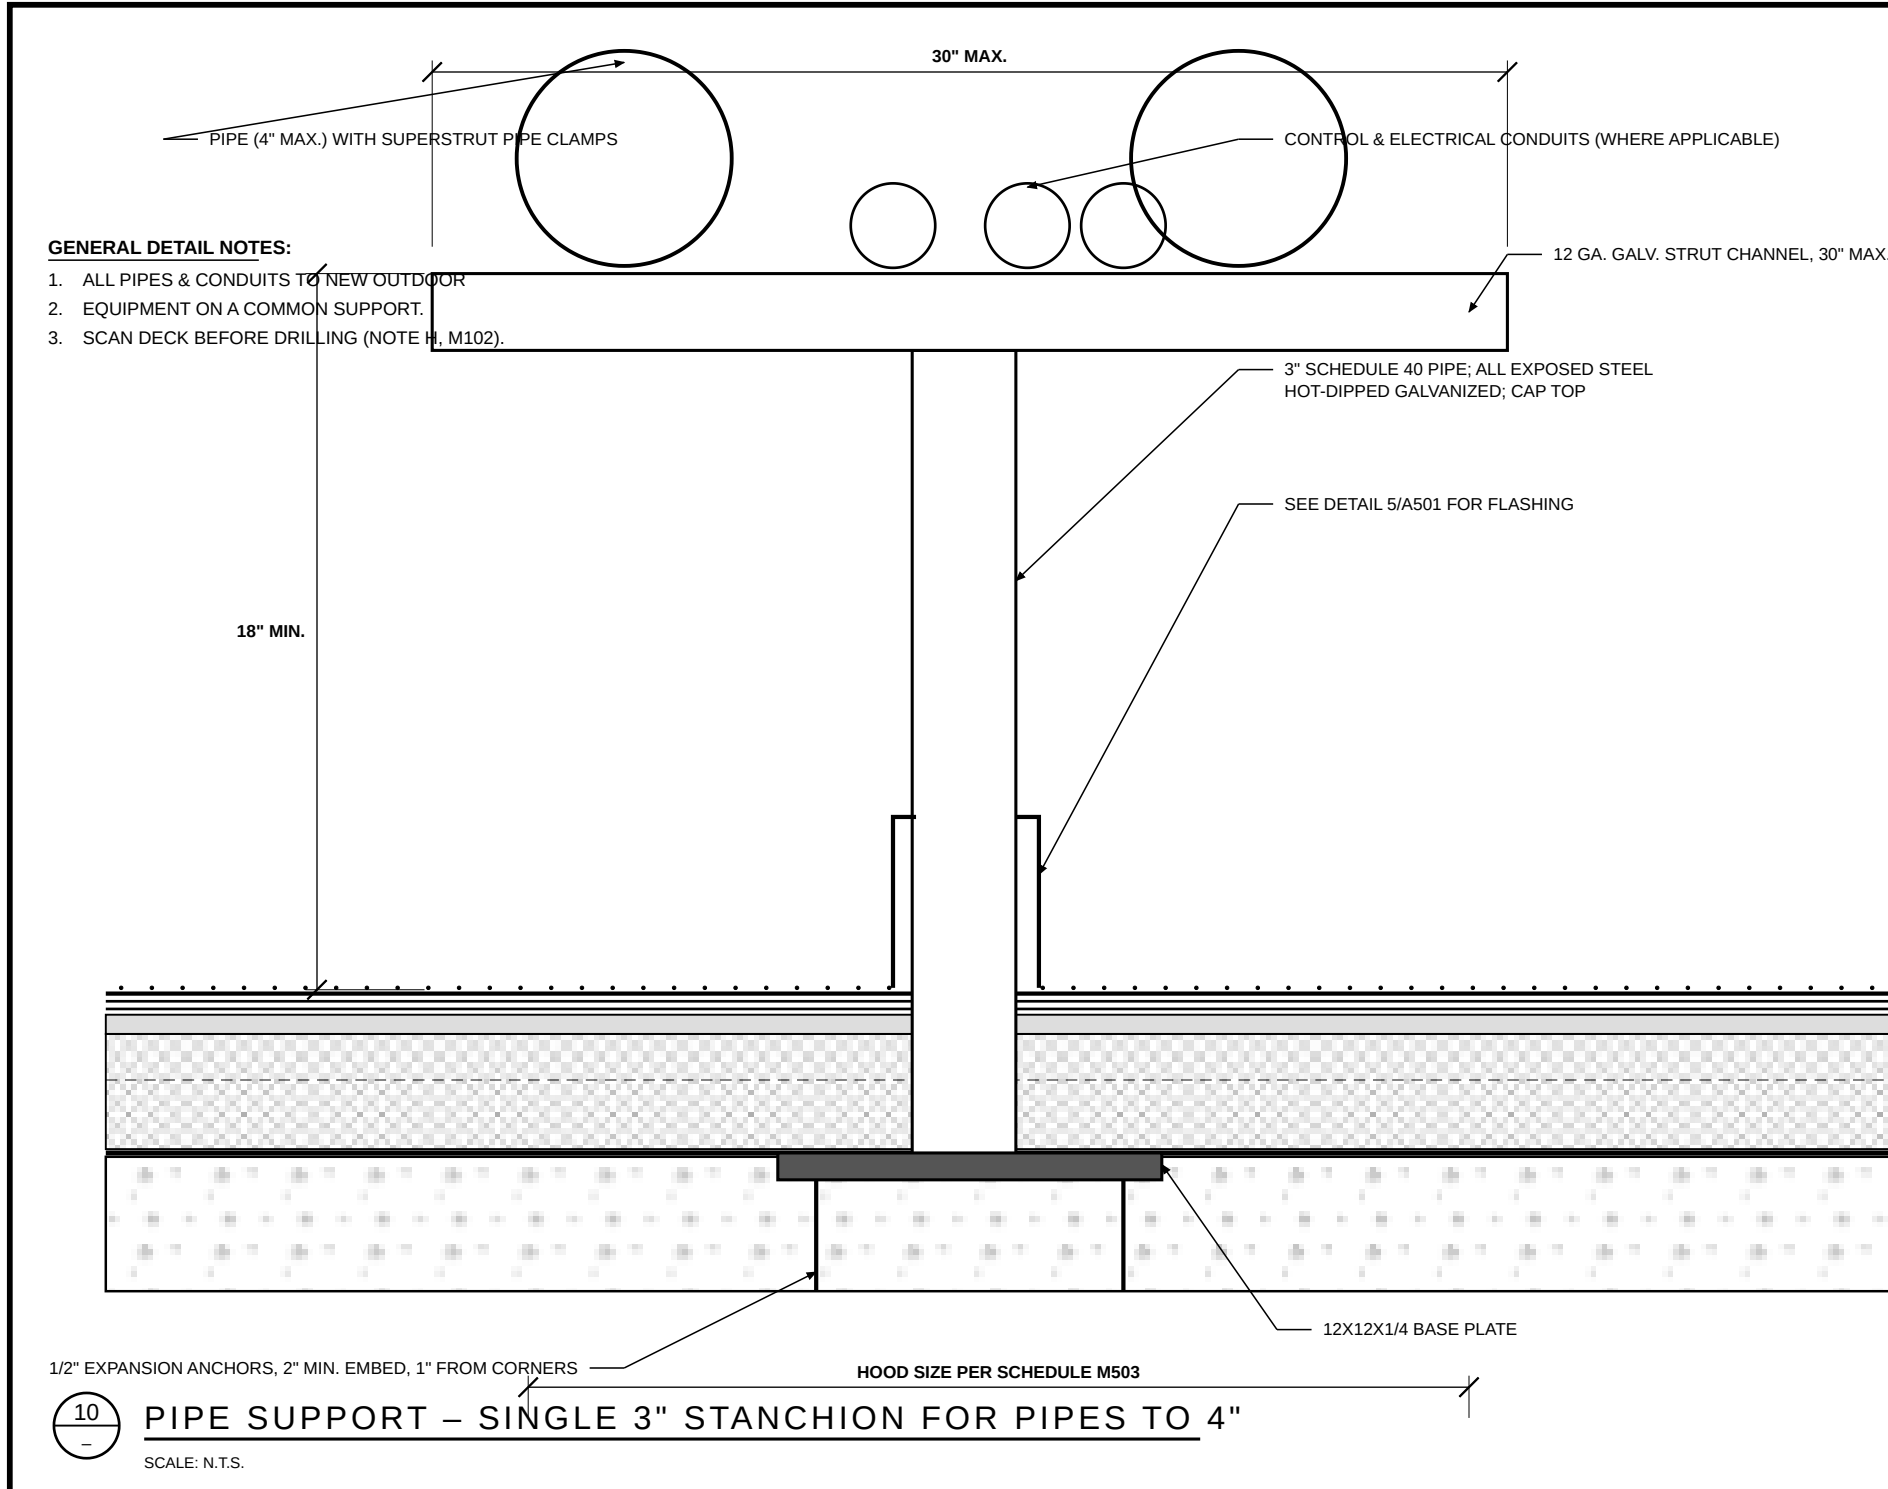

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION

FOR APPRENTICE BLUEPRINT READING ONLY

VME

VALLEY MEP ENGINEERS

MECHANICAL - ELECTRICAL - PLUMBING

900 N. SAMPLE BLVD. - FRESNO, CA 93700

(559) 555-0177

CONSULTANT STAMP

(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
	REVIEW SET	08/03/26	SRC
	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY

ROOFERS & WATERPROOFERS

JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER

ROOF REPLACEMENT

5537 E. LAMONA AVE. #1

FRESNO, CA 93727

SHEET TITLE:

DETAILS

MECHANICAL

JATC PROJECT NO.

JATC-26-07

DATE: 08/24/26

DRAWN BY: SRC

SCALE: AS NOTED

CHECKED: JR

PRACTICE SET

3A – INTRO TO PLANS

SHEET NO.

M501

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION

FOR APPRENTICE BLUEPRINT READING ONLY

VME

VALLEY MEP ENGINEERS

MECHANICAL - ELECTRICAL - PLUMBING

900 N. SAMPLE BLVD. - FRESNO, CA 93700

(559) 555-0177

CONSULTANT STAMP

(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
1	REVIEW SET	08/03/26	SRC
2	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY

ROOFERS & WATERPROOFERS

JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER
ROOF REPLACEMENT

5537 E. LAMONA AVE. #1


FRESNO, CA 93727

SHEET TITLE:

DETAILS
MECHANICAL

GENERAL DETAIL NOTES:

- FURNISHED & INSTALLED BY THE HVAC /
- CARRIER CONTRACTORS AS NOTED ON M102.
- ROOFER PROVIDES WALK PADS / EXTRA CAP
- SHEET UNDER EVERY FOOT.
- ALL STEEL HOT-DIPPED GALVANIZED.

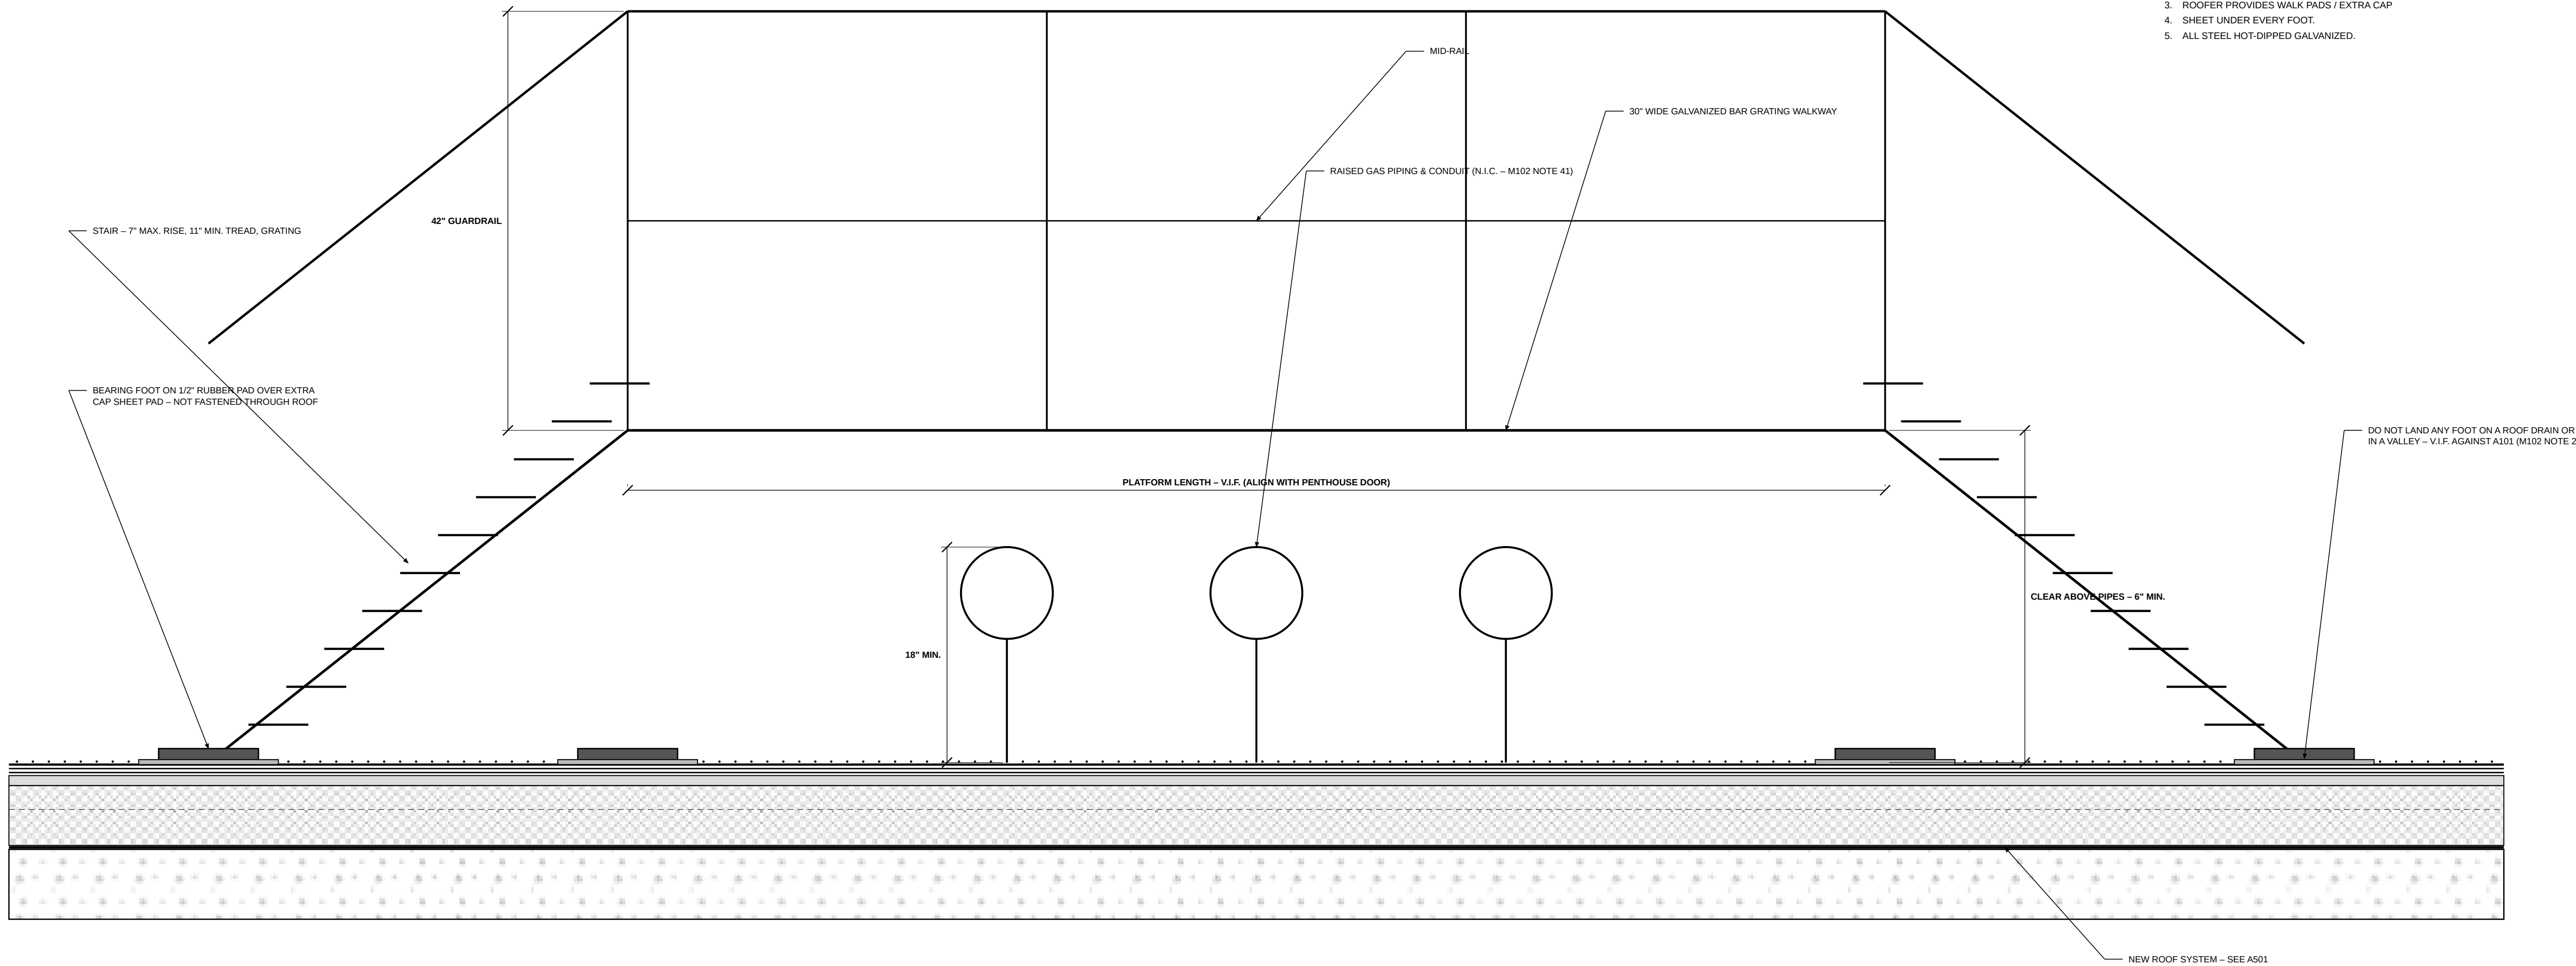


1

CROSS-OVER BRIDGE

SCALE: N.T.S.

GENERAL DETAIL NOTES:

- DEMO ABANDONED CURB / HOOD, CLEAN OPENING.
- OPENINGS OVER 36"x36": SEE DETAIL 2.
- ROOFER INSTALLS NEW ROOF OVER PATCH (A101).
- COORDINATE WITH ROOFING CONTRACTOR.

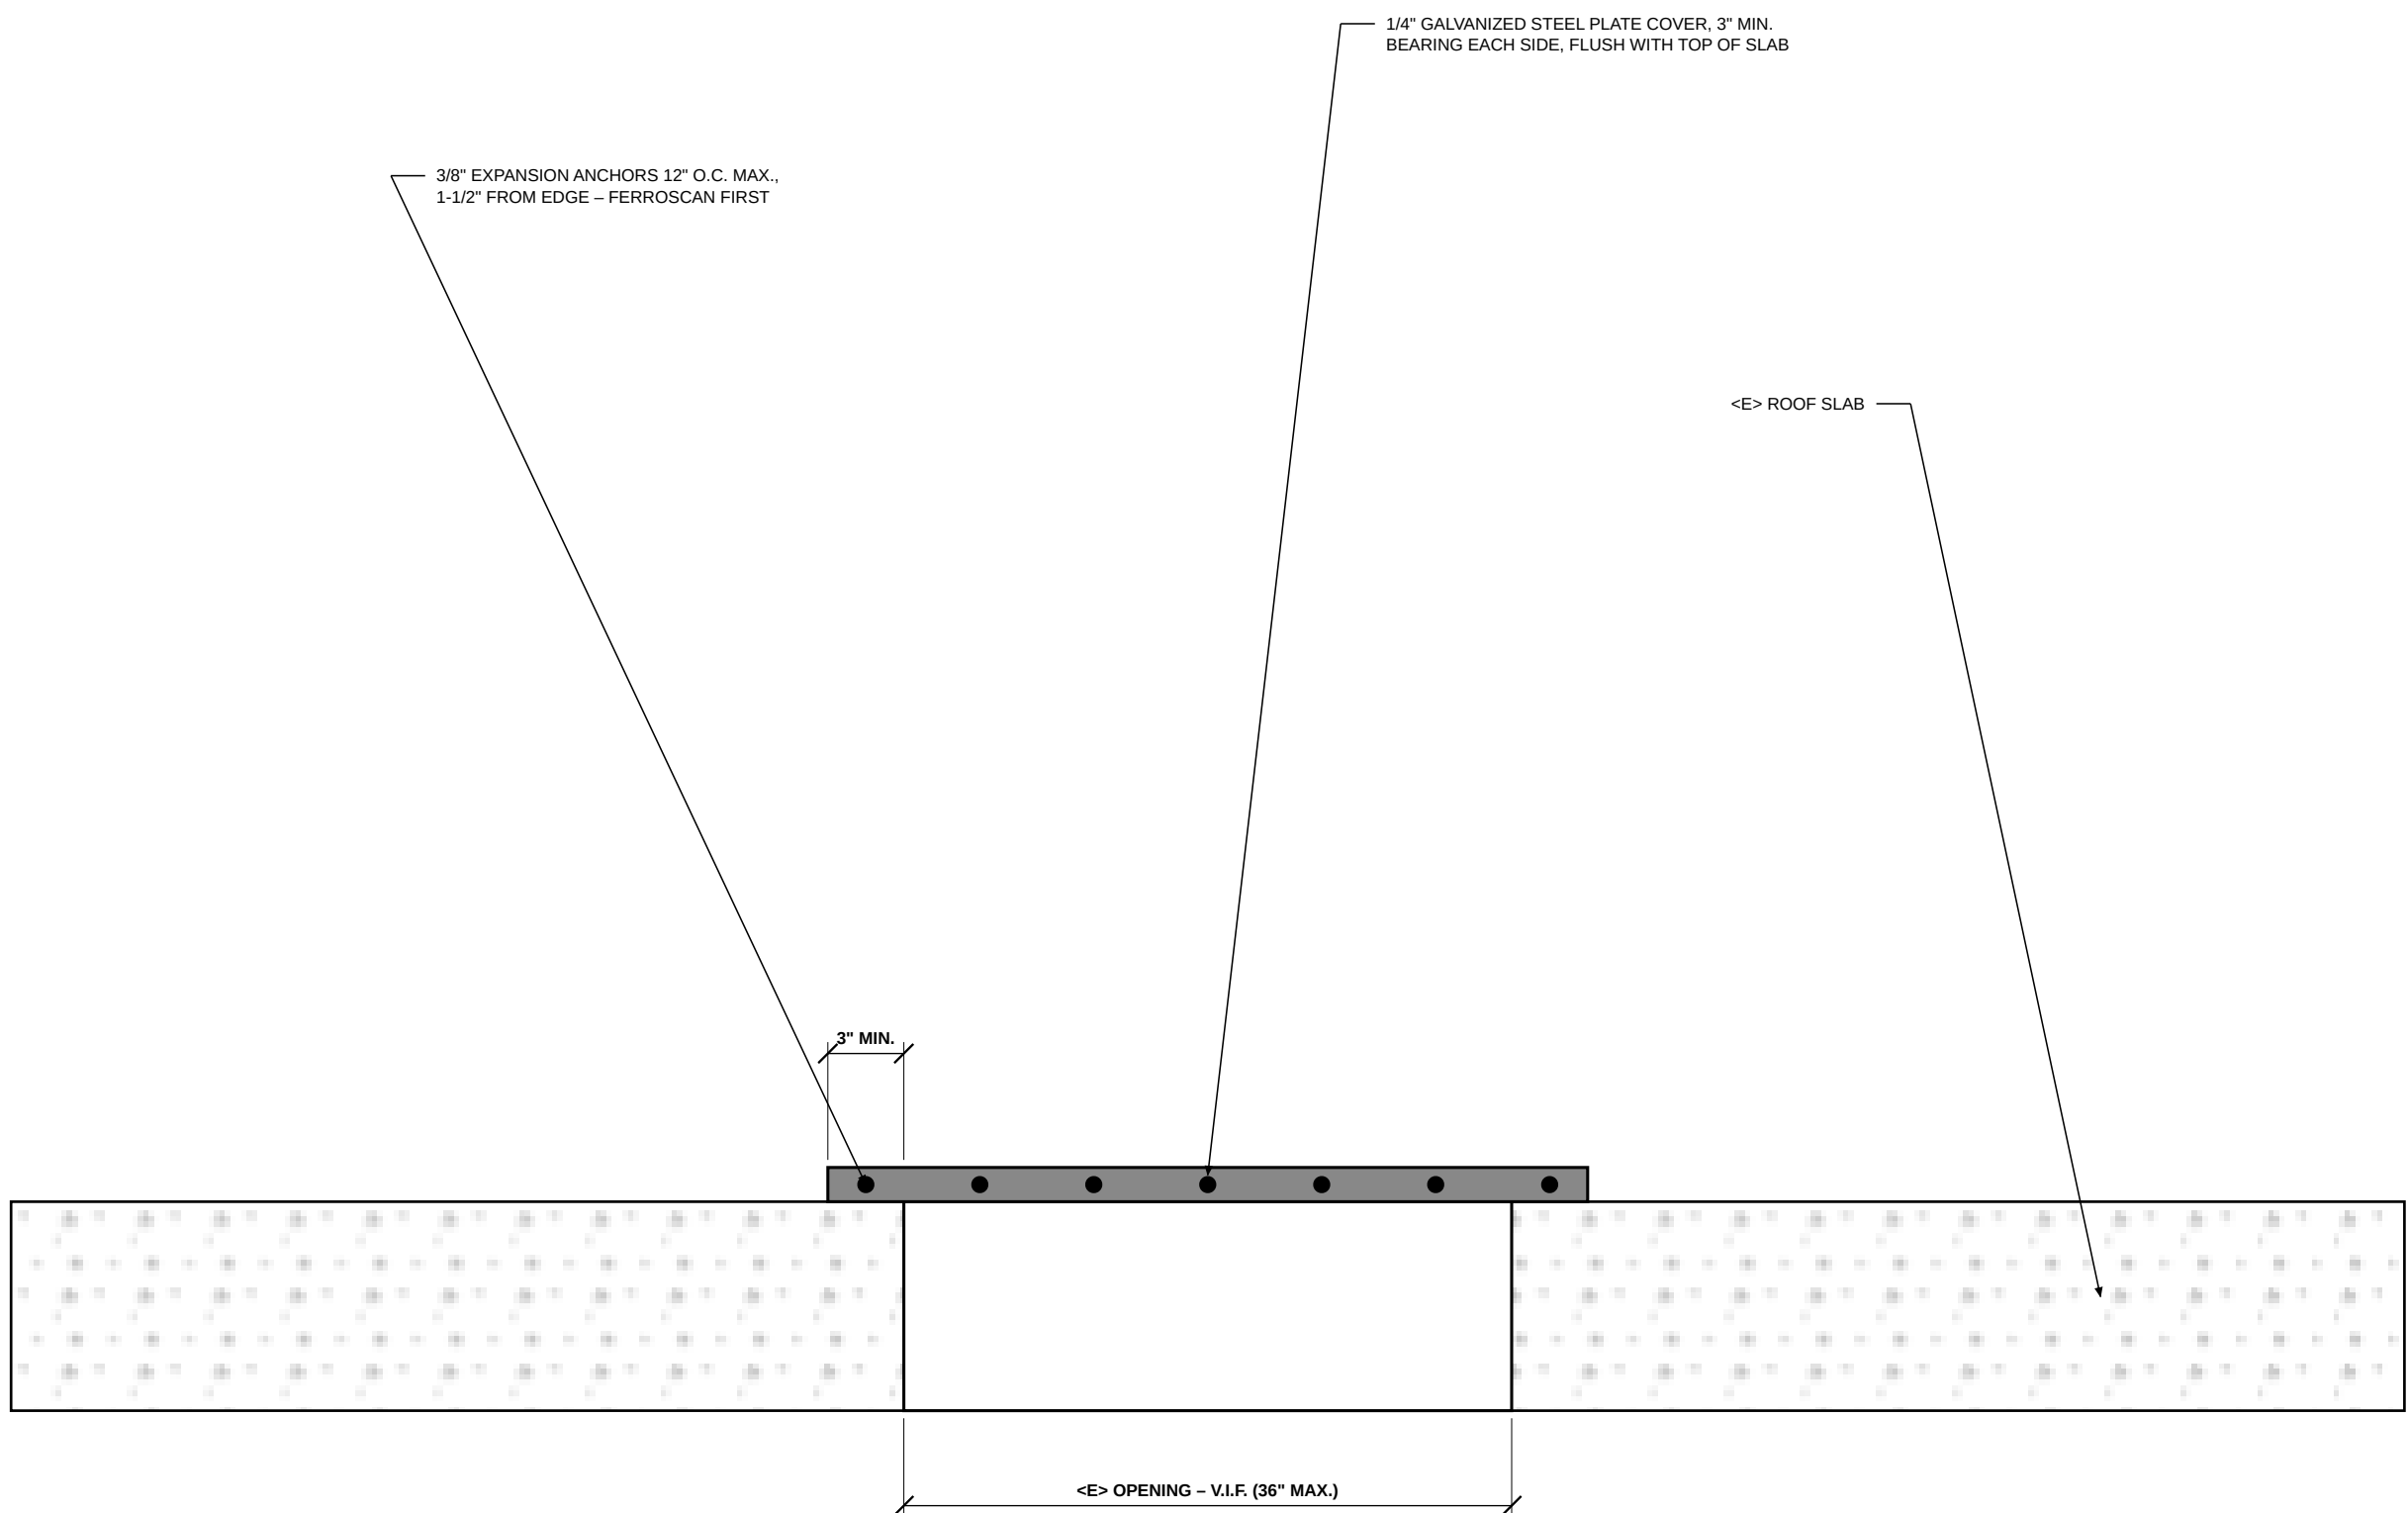


7

ROOF PATCH DETAIL (OPENINGS UP TO 36" x 36")

SCALE: N.T.S.

GENERAL DETAIL NOTES:

- SHORE AND FORM FROM BELOW.
- CURE 7 DAYS BEFORE PRIMING FOR ROOFING.
- SPECIAL INSPECTION OF EPOXY DOWELS PER CBC.

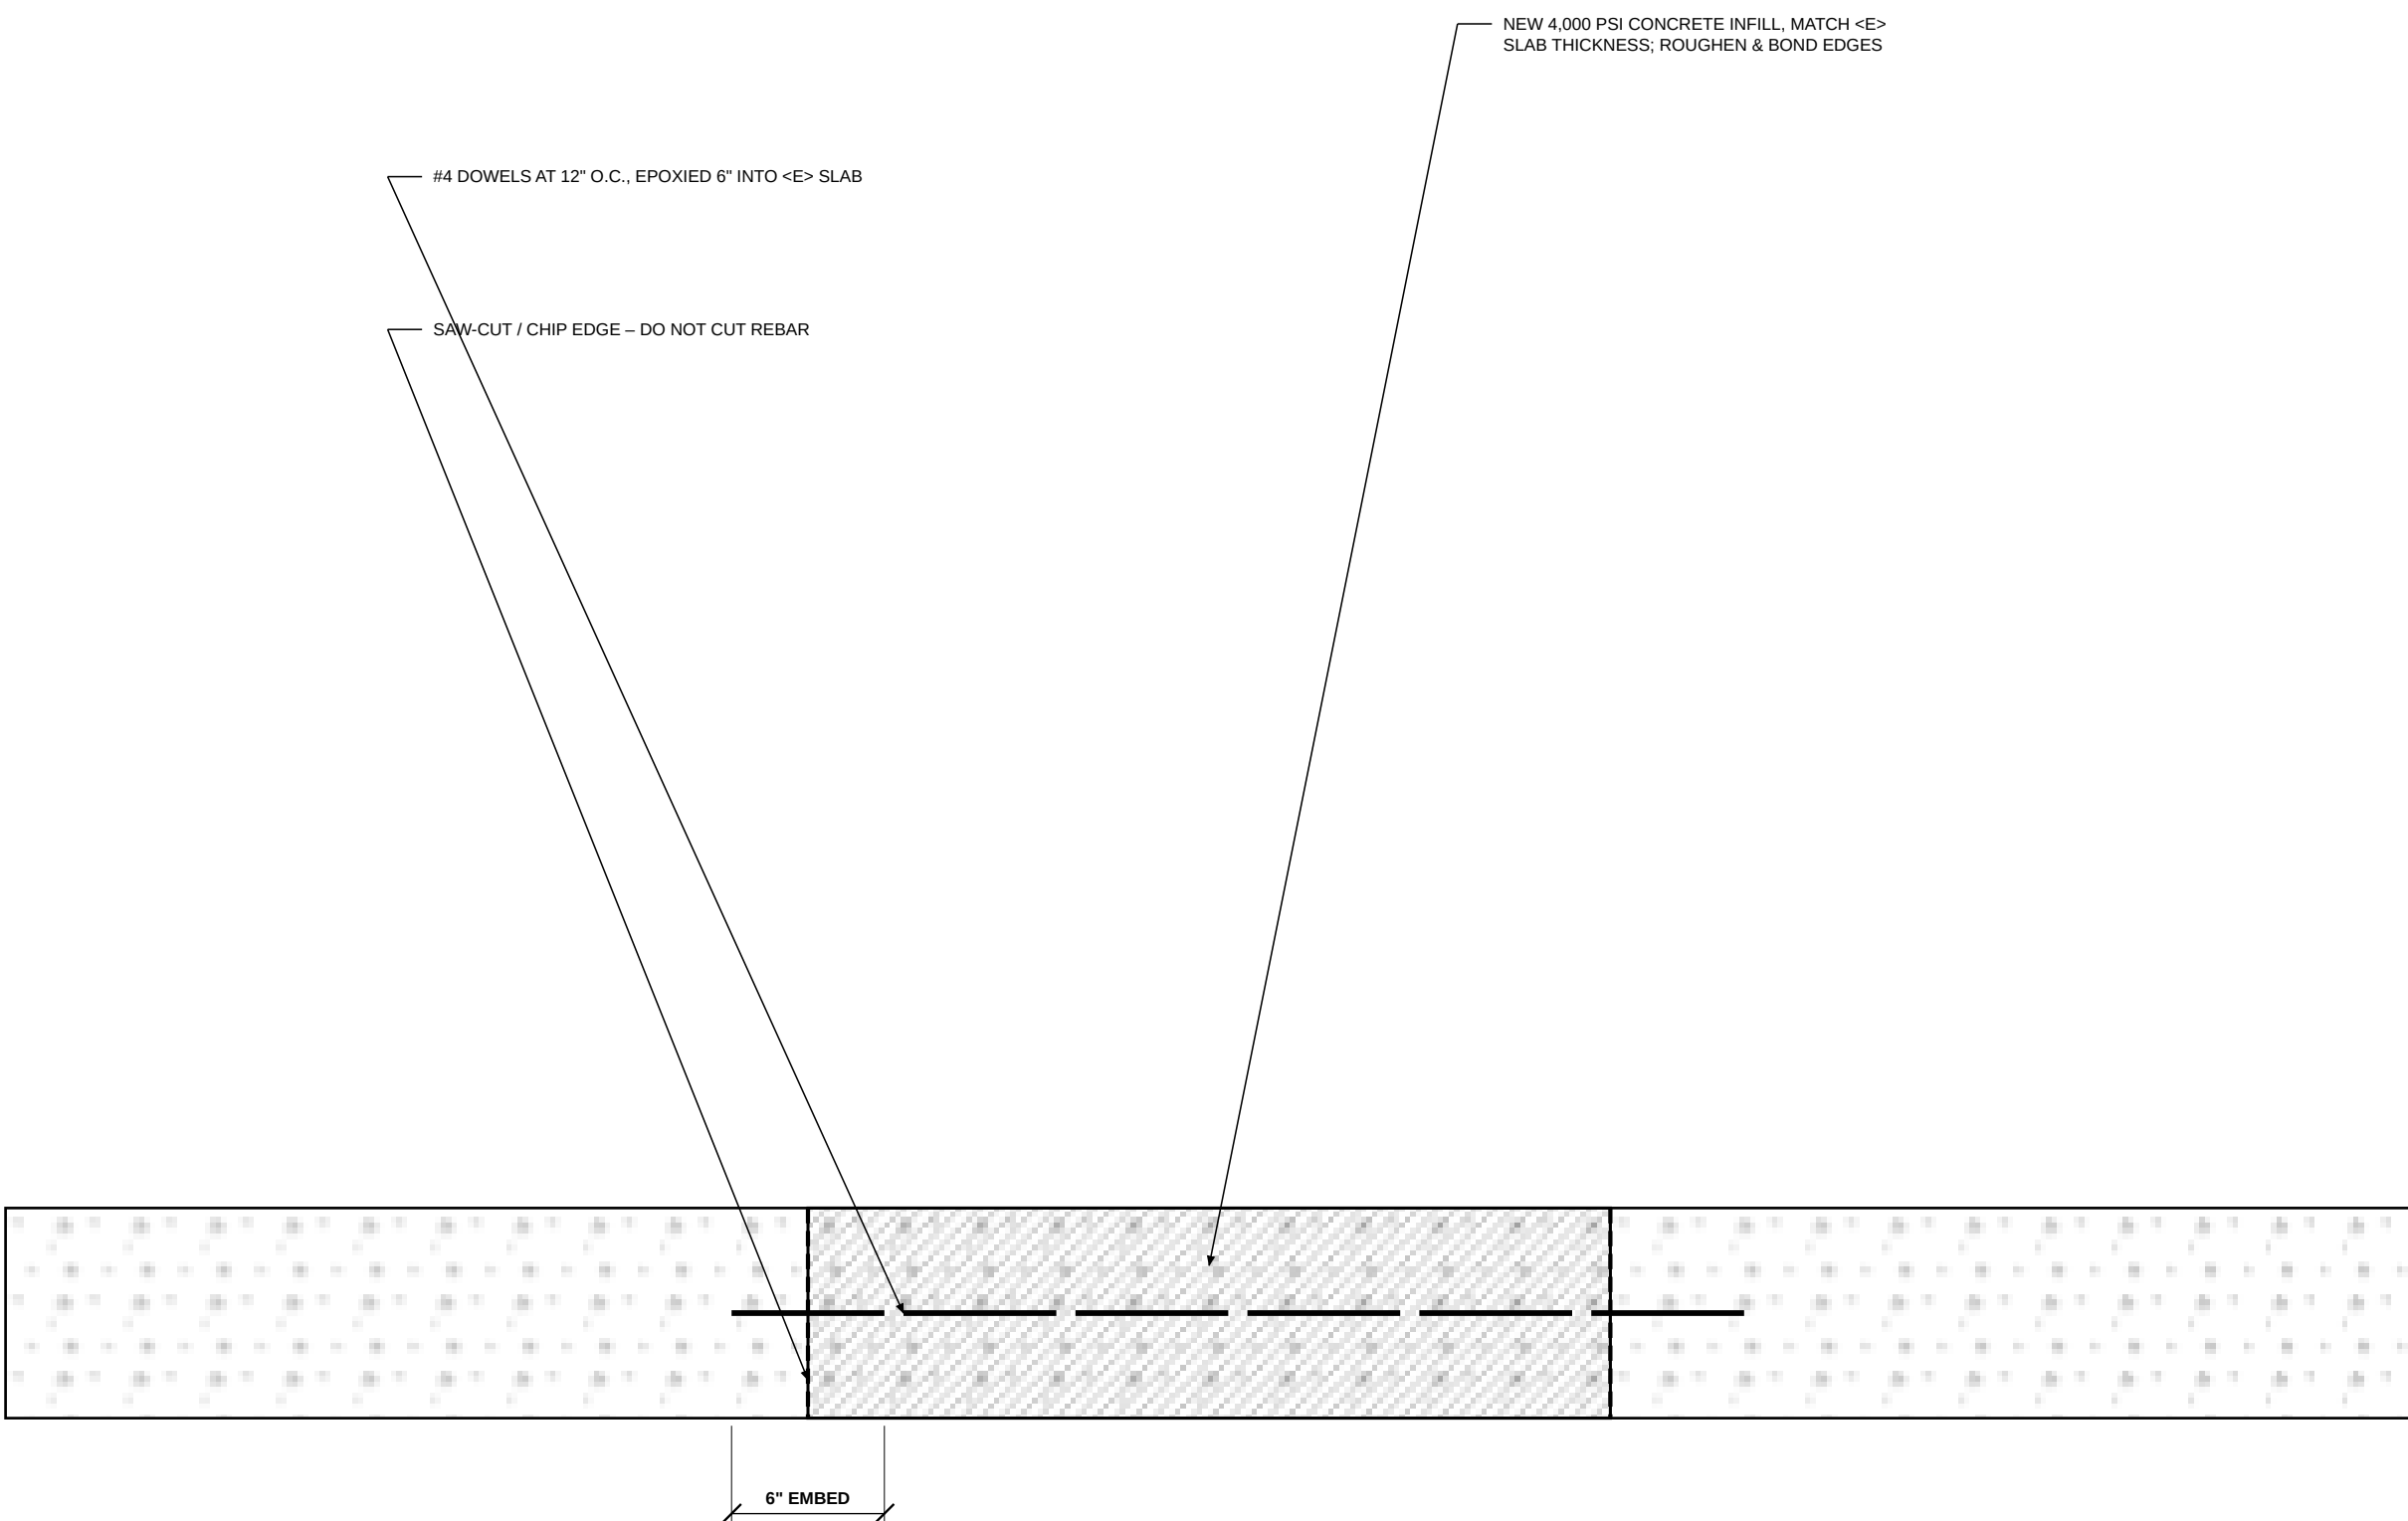

2

SECTION AT ROOF SLAB OPENING INFILL (OVER 36" x 36")

SCALE: N.T.S.

EQUIPMENT DEMOLITION / REMOVAL SCHEDULE						
TAG	EQUIPMENT	QTY	ACTION	BY	REPLACED?	REF.
—	CARRIER CABLE TRAY & SUPPORTS	1 LOT	DEMO – NEW TRAY ON PARAPET	CARRIER	YES (NEW)	M102D-1
—	ABANDONED ANTENNA MOUNT	1	DEMO	CARRIER	NO	M102D-2
—	CARRIER EQUIPMENT CABINET	1	TEMP. REMOVE, RAISE PLATFORM, REINSTALL	CARRIER	REINSTALLED	M102D-3
EF-1,2,3	EXHAUST FANS	3	TEMP. REMOVE, REINSTALL ON TALLER CURBS	MECHANICAL	REINSTALLED	M102D-10
—	HOSE BIBB	1	REMOVE, SAVE, EXTEND 10" MIN.	MECHANICAL	REINSTALLED	M102D-11
RH-1	RELIEF HOOD	1	DEMO – NEW HOOD PER 8/M501	MECHANICAL	YES (NEW)	M102D-12
—	ABANDONED OA HOODS	2	DEMO, PATCH OPENING 7/M502	MECHANICAL	NO	M102D-13
CU-1	CONDENSING UNIT (+ FC-1 2ND FLOOR)	1	DEMO, RECLAIM REFRIGERANT (EPA 608)	MECHANICAL	NO	M102D-14
—	ABANDONED CURBS	3	DEMO, PATCH OPENING 7/M502	MECHANICAL	NO	M102D-16

EXHAUST FAN SCHEDULE						
TAG	LOCATION	TYPE	CFM	HP / V / PH	NEW CURB HT.	NOTES
EF-1	WEST – SHOP LAB	CENTRIFUGAL DOWNBLAST	1,800	1/2 / 115 / 1	18"	REINSTALL, SEE 4/M501
EF-2	SOUTH – RESTROOMS	CENTRIFUGAL DOWNBLAST	650	1/4 / 115 / 1	18"	REINSTALL, SEE 4/M501
EF-3	EAST – STORAGE	CENTRIFUGAL DOWNBLAST	400	1/6 / 115 / 1	18"	REINSTALL, SEE 4/M501

ROOF DRAIN SCHEDULE						
TAG	TYPE	OUTLET	QTY	BODY	DOME	NOTES
RD	PRIMARY ROOF DRAIN	4"	8	CAST IRON, UNDER-DECK CLAMP	CAST IRON, GALV.	SEE 1/M501 & 3/A501
OD	OVERFLOW DRAIN, 2" DAM	4"	2	CAST IRON, UNDER-DECK CLAMP	CAST IRON, GALV.	SEE 6/M501 & 6/A502

ROOFTOP UNIT SCHEDULE (N.I.C. – FOR COORDINATION ONLY)						
TAG	TONS	WEIGHT	SUPPORT	BY		NOTES
RTU-1	12.5	1,650 LB	NEW EQUIPMENT SUPPORT 1/A501	HVAC REPLACEMENT CONTRACTOR		INSTALL FIRST – RE-ROOF AROUND IT FIRST
RTU-2	10	1,420 LB	NEW EQUIPMENT SUPPORT 1/A501	HVAC REPLACEMENT CONTRACTOR		INSTALL FIRST – RE-ROOF AROUND IT FIRST

NOTES:
1. ALL EQUIPMENT DATA IS FICTIONAL AND FOR TRAINING ONLY.
2. HOIST / CRANE LIFTS OVER THE PARKING LOT REQUIRE A LIFT PLAN AND THE LOT CLEARED OF APPRENTICE VEHICLES (SEE MOP).

TRAINING DOCUMENT

FICTIONAL PROJECT – NOT FOR CONSTRUCTION

FOR APPRENTICE BLUEPRINT READING ONLY

VME

VALLEY MEP ENGINEERS

MECHANICAL · ELECTRICAL · PLUMBING

900 N. SAMPLE BLVD. · FRESNO, CA 93700

(559) 555-0177

CONSULTANT STAMP

(PRACTICE SET – NO STAMP)

REVISIONS / AUTHORIZATIONS

NO.	REVISIONS / AUTHORIZATIONS	DATE	BY
	REVIEW SET	08/03/26	SRC
	BID SET	08/24/26	SRC

OWNER:

CENTRAL VALLEY

ROOFERS & WATERPROOFERS

JOINT APPRENTICESHIP TRAINING COMMITTEE

PROJECT TITLE:

TRAINING CENTER

ROOF REPLACEMENT

5537 E. LAMONA AVE. #1

FRESNO, CA 93727

SHEET TITLE:

SCHEDULES

MECHANICAL

JATC PROJECT NO.

JATC-26-07

DATE: 08/24/26

DRAWN BY: SRC

SCALE: AS NOTED

CHECKED: JR

PRACTICE SET

3A – INTRO TO PLANS

SHEET NO.

M503